



**ACT**  
COMMUNICATIONS™

*The First Name In Power Quality*

**PRODUCT CATALOG**

# TABLE OF CONTENTS



## COMPANY INFORMATION

Product Categories	1
Letter from the President	2
Key Staff	3
Why You Need Surge Protection	4
Six Key Products	5
Selecting the Right Surge Protection	6
Industrial & Commercial Facilities	7
Protected Telecom Cell Tower Application	9
Healthcare Facilities	10
Green Investments Protection	11
Common Power Distribution Systems	12
Data and Signal Line Protection	13

## A/C SURGE PROTECTION 14

471 SEL Selenium Hybrid Filter	15
471 Surge Seeker Family	19
455 Surge Stryker Family	23
455 LT Surge Stryker Family	27
453 TransShield Family	29
452 TransShield Family	31
452 P TransShield Family	33
452S TranShield Series Connected Family	35
450 LT DIN Rail Mounted Device	37
450 DS Family	39
LPA Light Pole Arrestor	40
LPA-CN Light Pole Arrestor	41

## DIN RAIL SURGE PROTECTION 42

450 LT DIN Rail Mounted Device	43
450 DS Family	45
450 DS2XX Family	46
422 DLU Family	47
422-XXX-200 Series Protectors	49

## A/C FILTER DESIGNS 51

320 Power Factor Filter	52
350 Line Reactor Filters	54
470 Advanced EMI Noise Filters	56
SV200 SaveVar Home Power Quality Filter	58

## DC SURGE PROTECTION 60

421 DC Transient Surge Arrestor	61
446 Dual Cable Location Protector	62
SS64 & SS65 Data/Signal Line Family	64
450 LT DIN Rail Mounted Device	66

## TELECOM / DATA PROTECTION 68

422 Telephone & Alarm Protector	69
422 D-sub Serial Surge Protection	70
422-XXX-200 Series Protectors	72
422 DLU Family	74
423 Coax/Video Surge Arrestors	76
424 GT Series	79
424 1/4 Wave Series	81
SS64 & SS65 Data/Signal Line Family	83

## CABLE LOCATION PROTECTION 85

Cable Location Training	86
442 & 444 Cable Location Protectors	92
445X Cable Location Protection	94
446 Dual Cable Location Protector	96
447 60hZ Filter/Protector Family	98
422 Telephone and Alarm Protector	100

CLICK AN ENTRY TO VIEW THAT PAGE

# PRODUCT CATEGORIES

PRODUCT	RESIDENTIAL	COMMERCIAL	INDUSTRIAL
<b>ACT 452</b> AC Surge Protection Devices	AC	AC	AC
<b>ACT 452-P</b> AC Surge Protection Devices	AC	AC	
<b>ACT 453</b> Distribution Panel AC Surge Protection Device	AC	AC	AC
<b>ACT 455</b> Primary Panel or Switchgear Surge Protection Device		AC	AC
<b>ACT 455LT</b> Primary AC Surge Protection Device		AC	AC
<b>ACT 450LT</b> Connected Filter Protector - DIN Rail			AC
<b>ACT SV200</b> SaveVar Home Power Quality Filter	AC		
<b>ACT 488</b> PowerSeptic Conditioned Power Distribution Panels	AC		
<b>ACT LPA</b> Light Pole Arrestor		AC	AC
<b>ACT LPA-CN</b> Light Pole Arrestor	AC	AC	
<b>ACT 320</b> Power Factor Filter			AC
<b>ACT 350</b> Line Reactor Filter			AC
<b>ACT 470</b> Advanced EMI/Noise Filter			AC
<b>ACT 471</b> Modular Primary Panel or Switchgear Surge Protection Device			AC
<b>ACT 471 SEL</b> Selenium Hybrid Power Filter Device			AC
<b>ACT 48X</b> PowerSeptic Conditioned Power Distribution Panel			AC
<b>ACT 421</b> DIN Rail Protector		AC	AC
<b>ACT 422</b> Telephone and Ethernet Data Protector	DC/Tel	DC/Tel	DC/Tel
<b>ACT 423</b> CCTV and Security Camera Protector	DC/Tel	DC/Tel	DC/Tel
<b>ACT 424</b> Coax Surge Arrestor		DC/Tel	DC/Tel
<b>ACT SS65</b> DC Series Protection			DC/Tel

AC AC Products

DC/Tel DC & Telephone Products

# LETTER FROM THE PRESIDENT

With the past and upcoming economic challenges for manufacturing companies throughout the world, I am very excited and pleased to see that ACT has been able to maintain continued organic growth. I credit much of our success to the fact that we are an engineering-driven company and we strive to get things right the first time. This attitude flows through both management and our employees, and is reflected in the fact that our quality is unparalleled in this or any other industry. ACT has a commitment to purchasing components and designing and manufacturing all our products in the United States. By doing so, we feel we have gained a higher quality product and also gained an edge over our competitors.

I am excited for the future and look forward to the coming years with all our Customers and our new Sales Representatives throughout the country.

Regards,



Greg Glaser  
President

[www.act-communications.com](http://www.act-communications.com)





# ACT COMMUNICATIONS: KEY STAFF

ACT Communications, Inc. is a privately held company whose purpose is to develop, manufacture and sell only the highest quality of surge and filter products. We are proud of our corporate commitment and believe we have a real responsibility to ensure that our products are designed and made 100% in the USA.

ACT Communications Inc. employees are well trained in current manufacturing techniques, continuous improvement processes and work under a Quality Management System. Our key employees can be reached by calling our factory phone at (903) 583-8097.



**GREG GLASER President** | [gregglaser@act-communications.com](mailto:gregglaser@act-communications.com)

With a Bachelor of Science degree in Information Systems Technologies and an Associate's degree in Fiber Optic Technologies, Greg has worked in Computer Systems and the telecommunications industry for the past 20 years. As ACT's president, he has continually pushed for innovative customer solutions using industry-recognized production processes and the most current technologies available. As a result of this leadership, ACT demands the highest quality in our manufacturing and fully tests every product before shipping. Not surprisingly, this has resulted in one the highest "out of box" success rates in our industry.



**RON GLASER VP of Engineering / Sales** | [ronglaser@act-communications.com](mailto:ronglaser@act-communications.com)

Holding a Bachelor of Science degree in Electronic Engineering and a MBA in International Marketing, Ron has held multitude VP and senior manager positions in sales and marketing for power quality companies like ACT Communications, General Electric (GE Industrial), Current Technology, Joslyn Protection and Environmental Potential (EP). His engineering experience includes both product development and real field applications, and has driven the development of special solution products which includes being listed by name on six Power Quality and Telecom Surge Protection patents. His extensive experience also allows the ACT engineering team to quickly respond to customer demands with solid product solutions in a cost effective manner.



**CODY VEST Asst. Operations Manager**

Cody holds a Bachelor of Science degree in Business Management. His responsibilities include monitoring the progress of each order through our company, from order placement to shipping out the door in a timely manner. Cody works hard to make sure what you asked for is what arrives at your dock.



**STACY GLASER Inside Sales Operator**

Stacy is a key part of our Inside Sales Team and also our corporate secretary. She is usually the first voice you will meet at ACT Communications, and can be counted on for connecting you to the right person. She has worked with several other technical sales companies over the years and has been a part of the ACT Team since day one.

# WHY YOU NEED SURGE PROTECTION

## The Institute of Electrical and Electronics Engineers (IEEE) says a facility should be protected in stages.


Facility Protection Strategy is all about risk aversion and answering the right questions about your facility:

- ▶ **What is the risk to our personnel?**
- ▶ **What is the risk of equipment damage?**
- ▶ **Is equipment installed on critical power?**
- ▶ **Any negative consequence to revenue stream if equipment fails?**
- ▶ **Are there any legal ramifications to equipment failure (i.e loss of lights or cameras)?**

Many times the risk to the operation greatly exceeds the cost of the damaged equipment. Make sure when a Return On Investment (ROI) model is done that total cost of equipment damage is realized. In most facilities the cost of proper protection is less than pennies on the dollar to the value of the failed equipment and operation being performed. An easy rule of thumb is to spend no more than 10% of the facility economic risk.

## Sources of Transients and Surges


Lightning clearly damages millions of dollars' worth of equipment in a spectacular fashion every year; in reality it is not even the number one source of damage to a facility. Many studies have shown that lightning only accounted for 7% of all power quality events. Instead 85% of the measured power quality events actually had their source from inside the facility. Dirty power caused by switching power supplies found in computers, new lighting and VFD motors.

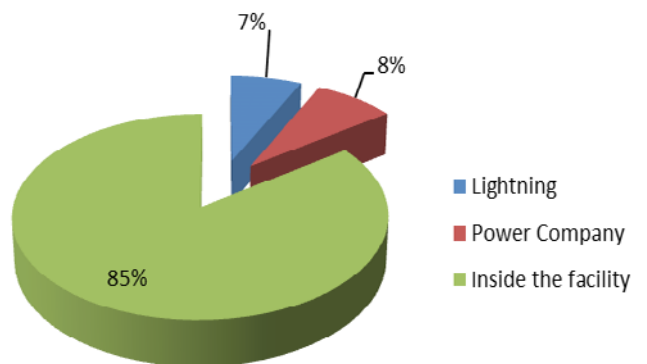

# SIX KEY PRODUCTS FOR SIX KEY LOCATIONS

## A Strategic Protection Plan for Any Facility

- 1 Capture the lightning strike**  
Capture the lightning strike to a known and preferred attachment point using a purpose-designed air terminal system.
- 2 Convey this energy to ground**  
Conduct the energy to the ground via a purpose-designed downconductor.
- 3 Dissipate the energy into the grounding system**  
Dissipate the energy into a low-impedance grounding system.
- 4 Bond all ground points together**  
Bond all ground points to eliminate ground loops and create an equipotential plane.
- 5 Protect incoming AC power feeders**  
Protect equipment from surges and transients on incoming power lines to prevent equipment damage and costly operational downtime.
- 6 Protect low-voltage data/telecommunications circuits**  
Protect equipment from surges and transients on incoming telecommunications and signal lines to prevent equipment damage and costly operational downtime.

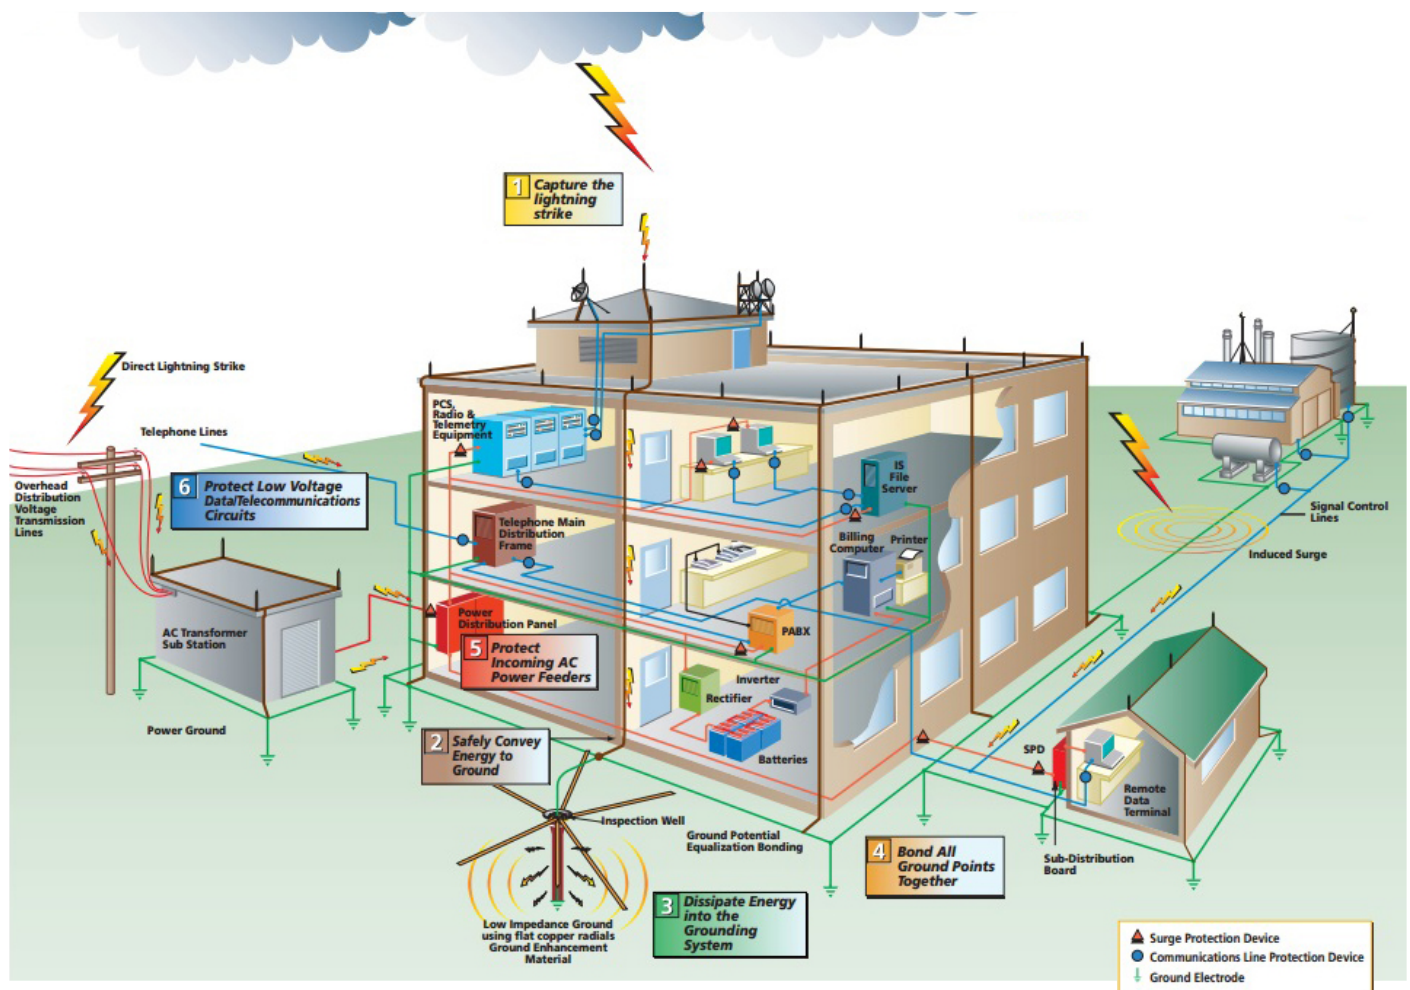

# SELECTING THE RIGHT SURGE PROTECTION

**Surge protection should be selected by how much real risk is to be found at a specific location.**

## Where should surge protection be installed?



A primary surge protector should be considered wherever a metal based cable or wire enters or exits a facility, regardless of whether it's AC or DC power, telephone, or security and video.

## How should a facility manager select the right SPD for a given location?

There are 5 general parameters that should be considered to ensure a Surge Protection Device (SPD) is robust enough to do the job for your facility.

1. The SPD selected should have a normal turn on voltage (suppression voltage) set for at least 20% higher than operating voltage. This prevents false operation of the protector.
2. For series devices like the ACT 450LT and any data protector like the SS64 or ACT 422 DLU protector, customers must ensure that the series rating of the load does not exceed the current rating of the SPD.
3. For series devices it is important that the product selected has the correct bandwidth to allow signal to pass with minimum loss. For example telephone or ethernet protector.
4. The connection and mounting method and most importantly the number of lines to be protected should be clearly understood before product is ordered.
5. The SPD surge rating should be appropriate for the intended location. The higher the risk the larger kA of protection should be selected.

## ACT manufactures custom designed SPDs to properly protect your facility for any application: RECOMMENDED SURGE RATINGS (8/20 $\mu$ s)

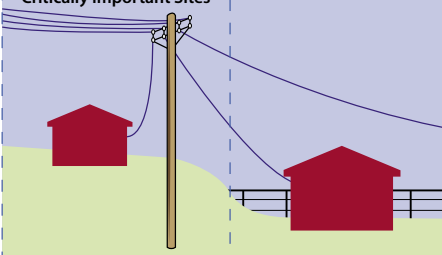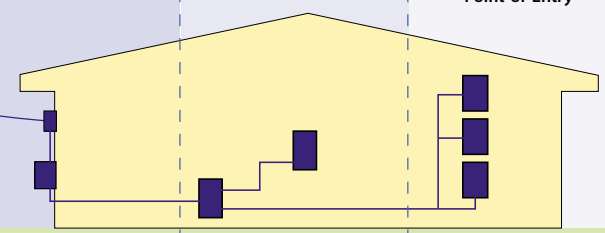ANSI/IEEE C62.41	I		Cat C	Cat B	Cat A
IEC 61643 TEST CLASS	A		I, II	II	III
VDE CLASSIFICATION	A		B	C	D
	Point-of-Entry Highly Exposed or Critically Important Sites	Point-of-Entry Exposed or Rural Sites	Point-of-Entry Inner City Sites	Sub Circuits or Near to Point-of-Entry	Distributed Circuits, Power Outlets, Circuits Remote from Point-of-Entry
EXPOSURE					
HIGH	100kA	70kA	40kA	20kA	10kA
MEDIUM	65kA	40kA	20kA	20kA	5kA
LOW	65kA	40kA	15kA	5kA	3kA
MINIMUM LEVELS OF PROTECTION	240kA per mode 160kA	160kA per mode 100kA	100kA per mode 080kA	080kA per mode 040kA	040kA per mode 010kA
<b>RECOMMENDED PRODUCTS</b>					
ACT PRODUCT SERIES	ACT 471		ACT 455		
	ACT 471-SEL		ACT 453		
			ACT 452		
			ACT 450 LT Series Connected		
			ACT 450 DIN Protector		
		ACT 422			




# INDUSTRIAL & COMMERCIAL FACILITIES

## Industrial Facilities Need a Coordinated Plan

Industrial facilities are at great risk to power quality events like transient surges because of the number of cables and conduit that leave a facility to other buildings and externally mounted equipment. A surge protector or line filter is only as good as the earth ground they are connected to. A facility planner must ensure that multi-ground points and differences in potential grounds do not exist. Normally a coordinated ground study is helpful to ensure there are not ground risks at large facilities.


## Typical Protection Products Specified

- ▶ **AC Power** – ACT 471, 455 and are perfect products for AC Power locations
- ▶ **POE Protection** – ACT 450 LT is a series AC or DC protector with filters
- ▶ **Telecom/Datacom** – ACT 422 is an ideal protector for any telecom, datacom and alarm type protection.

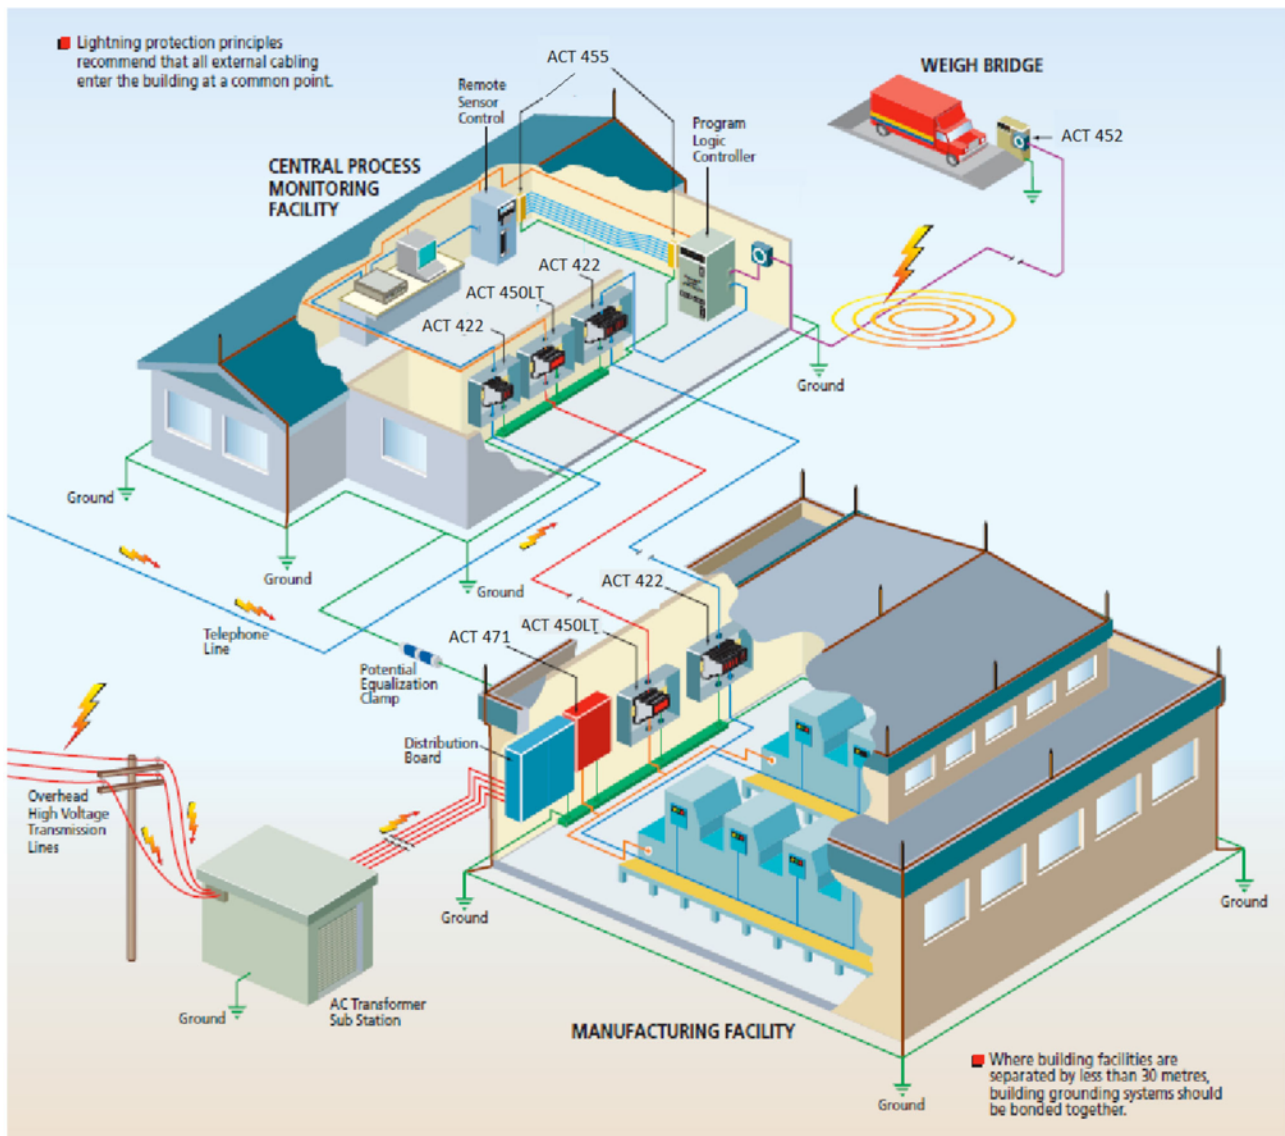

The Six Point Plan applied to a manufacturing facility. Surge and transient protection principles applied to a total facility rather than individual pieces of equipment.

# INDUSTRIAL & COMMERCIAL FACILITIES

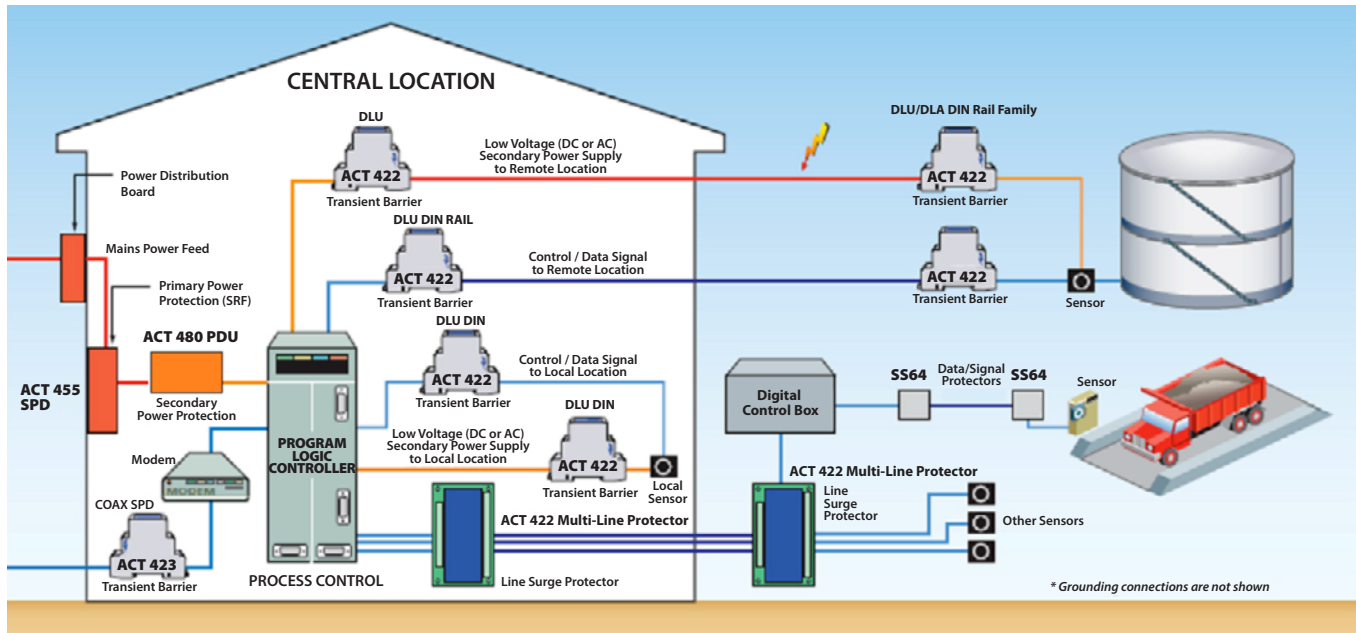


## Commercial Facilities Need a Coordinated Plan


Commercial Facilities are at even greater risk to power quality events like transient surges and harmonics because of the number of highly sensitive electronic based devices. ACT Surge Protection devices in a fifteen year study with a major big box store has shown a reduction in electrical lightning repairs by 70%, and also reducing HVAC service calls by over 35%.

### Typical Protection Products Specified

- ▶ **AC Power** – ACT 471, 455 are perfect products for protecting incoming AC Power locations. The ACT 48X Power Distribution Unit not only distributes power in the racks but also provides POE protection.
- ▶ **POE Protection** – ACT 450LT is a series AC or DC protector with filters that protect point of equipment.
- ▶ **Telecom/Datacom** – ACT 422 is an ideal protector for any telecom, datacom and alarm type protection.

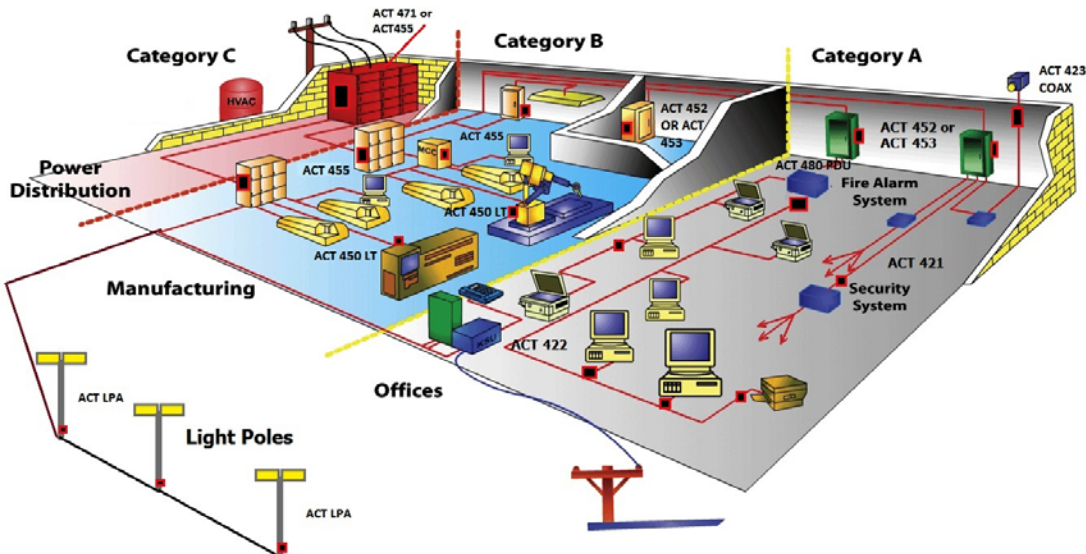

# PROTECTED TELECOM CELL TOWER APPLICATION

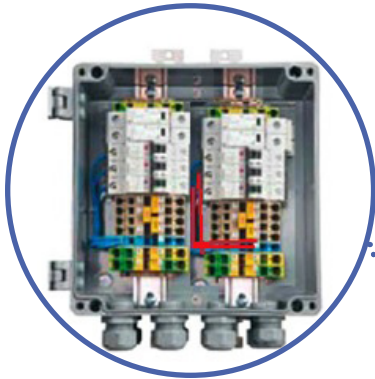

## ACT 490

48V Power Distribution Box



## ACT 424

RF Coax Protectors



## ACT 422

Telephone/Datacom Protector




## ACT 471

AC Power Surge Protection Device



## ACT 444

Fiber Cable Location Protector and DC Protector

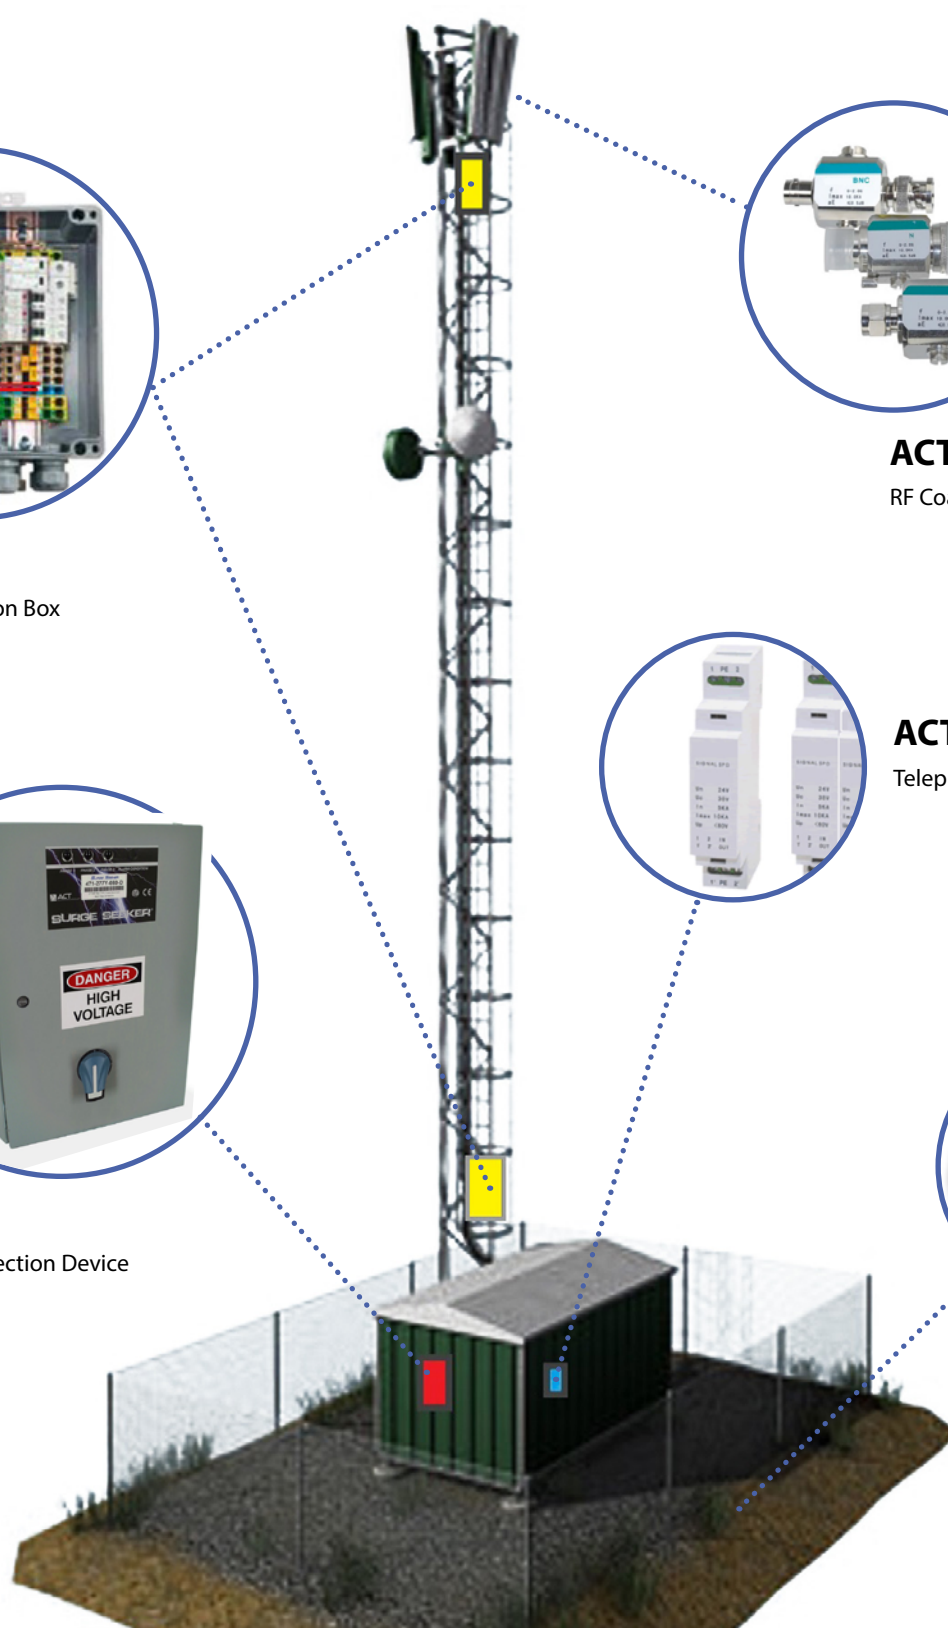



# HEALTHCARE FACILITIES

## Healthcare Facilities Need a Coordinated Plan



Healthcare facilities protect precious life with sensitive equipment worth millions of dollars. It makes no sense for such a facility not to develop a proper protection strategy for its whole facility.

### Typical Protection Products Specified

- ▶ **A/C Power** – ACT 471, 455 & LPA and are perfect products for A/C Power locations
- ▶ **Secondary A/C Power** – ACT 453 provides excellent secondary protection for parking lot A/C panels
- ▶ **Telecom/Datacom** – ACT 422 is an ideal protector for any telecom, datacom and alarm type protection
- ▶ **Fiber** – ACT 444 for protecting buried fiber cable



# Protect Your Sensitive **GREEN** Investments

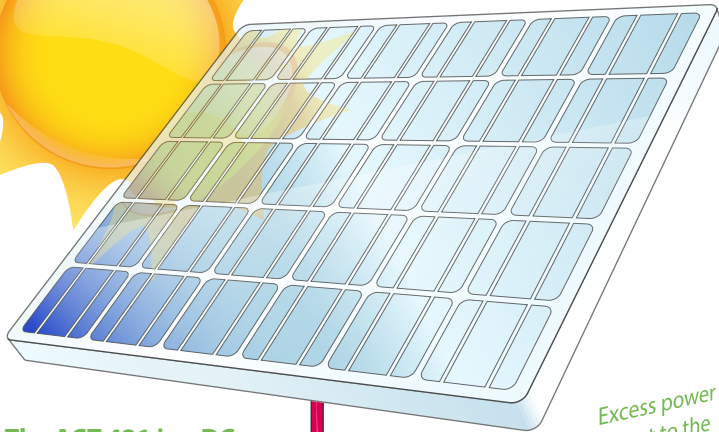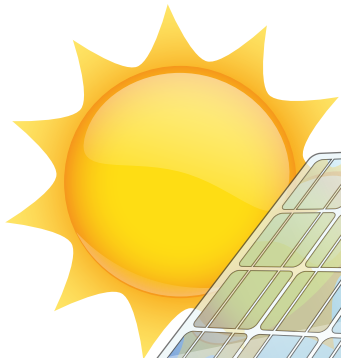


The ACT 421 is a DC surge arrester specifically designed to protect solar panel arrays up to 600 volts. Being waterproof makes it perfect for outdoor and indoor mounting



**ACT 455**  
Surge Stryker SPD








The ACT 455 is the perfect Surge Protection Device (SPD) for your primary AC power. It reacts within nanoseconds to any transient or over-voltage surges. With optional power filter, it also protects sensitive electronics from power noise and EMI.

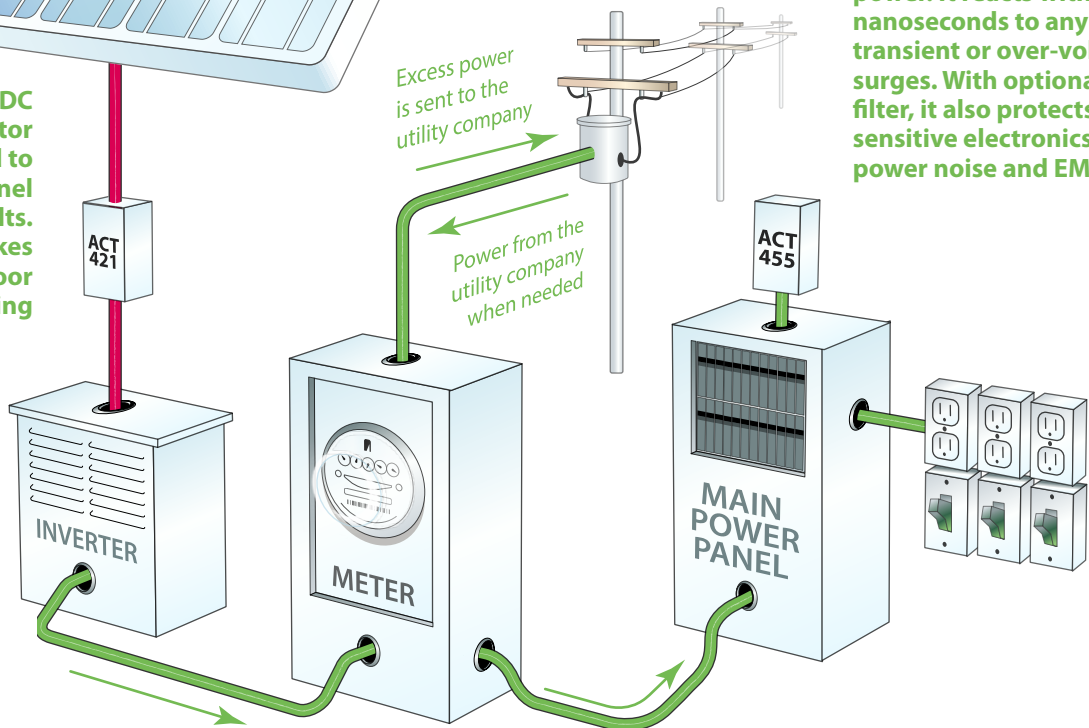

**ACT 421**  
DC Transient Surge Arrester

# COMMON POWER DISTRIBUTION SYSTEMS


Throughout the world, a number of different power distribution systems are used. This guide identifies the more common of these systems. The individual product specification tables detail system suitability.

Description	Source Configuration	Typical Supply Voltages
Single Phase 1Ph, 2W+G		110V 120V 220V 240V (L-N)
Single Phase 1Ph, 3W+G Also known as Split phase or Edison system		120/240V (L-N/L-L)
Three Phase WYE without neutral 3Ph Y, 3W+G		480V (L-L)
Three Phase WYE with neutral 3Ph Y, 4W+G		120/208V 220/380V 230/400V 240/415V 277/480V 347/600V (L-N/L-L)
Delta High leg 3Ph Δ, 4W+G		120/240V (L-N/L-L)
Delta Ungrounded 3Ph Δ, 3W+G		240V 480V (L-L)
Delta Grounded corner 3Ph Δ, 3W+G		240V 480V (L-L)


# DATA AND SIGNAL LINE PROTECTION

## Sample Applications for ACT 422-DLU and 422-200 Series


### ► 2-Wire Isolated Ground Transducers/Sensors

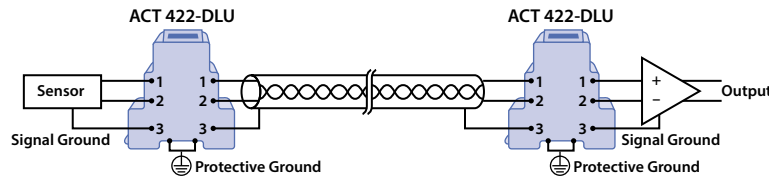


### ► 2-Wire Sensors

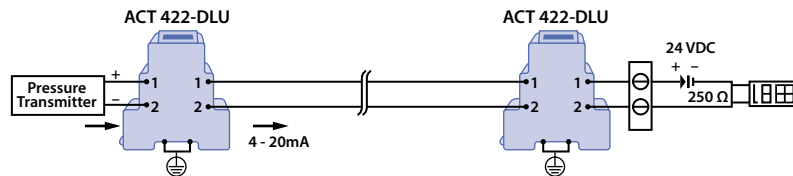

### ► Powered Sensor Protection

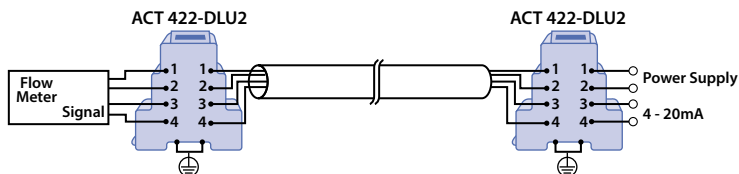

### ► Multiple Sensor or up to 4-Wire Sensor

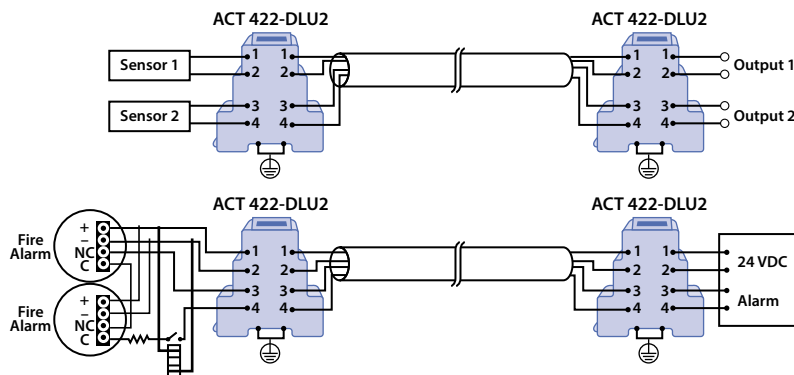



# A/C SURGE PROTECTION

# ACT 471SEL Selenium Hybrid Filter Device

A Full-Featured Primary Surge Protection/Filter Device



▶ Power quality is more important today than ever before and that means not just any surge protector can be relied on to protect your facility properly. The ACT 471 SEL Family is designed to protect all phases and modes against transient surges and limited over voltage events and, with the Advanced Power Filter selected, is able to reduce induced high frequency noise by over 50 dB across a broad frequency spectrum.

Unlike many of our competitors, the ACT hybrid design comes standard with many different alarm options. Add our Power Quality Meter option and no other company can provide this level of Power Quality Diagnostic information. "Transient Snap Shot" and "Time Stamp Data Logger" are included.

**No other protection company is offering this breadth of power filtering and monitoring capability in a single package.**

## ▶ RECOMMENDED LOCATION

- Building Entrance / Cat C
- Primary Surge Protection for a Facility
- Switch Gear
- Motor Control Center

## ▶ FEATURES AND BENEFITS

- Listed Type 1 and Type 2
- 200 kAIC rated Fuse or Optional Fused Disconnect
- Up to 300,000 amps per mode modular protection (600,000 per Phase)
- **BEST IN CLASS** built in Filter options in the market >55dB
  - Advanced filter targets most common transient surges and damaging medium frequency noises
- Copper Bus Connected Surge Modules
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
  - 7 Modes Discrete (L-N, L-G, N-G)
- Dual Surge Counter Options (Continuous and Resettable)
- Microprocessor-Based PQ Meter
- Smart Monitoring
  - Diagnostic board not only tells you Good & Bad Phase protection but also what module needs replaced
  - Selenium Over Voltage Filter is individually monitored
- NO / NC Form C Dry Contacts
  - For remote monitoring & control (250V 5 A rating)
  - Individual Remote Monitoring of both MOV and Selenium Rectifiers
- Individually Fused and Protected MOV Technology
- NEMA 4 & NEMA 12 Painted Steel Enclosure
- 20 Year Standard Warranty – Options with extended warranty card

## **MOST ADVANCED MONITORING SYSTEM ON THE MARKET**

- Lights (LED) – Green per Phase, Red - Alarm
- Audible Alarms – STANDARD
- Dual Relays – STANDARD NO / NC Form C Dry Contacts
- Dual Surge Counters (optional)
- Full Microprocessor-Based Power Quality Meter (optional)
- Logging Capability (optional)
- Event Waveform Capture (optional)

## ▶ STANDARDS MET

- Listed to UL 1449 4th edition March 2016
- Power Filtering – UL 1283
- ANSI/NFPA 70 National Electrical Code
- NEMA LS 1-1992

## ▶ 3RD PARTY TESTED

- ACT 471 is tested in all modes at rated currents by independent testing facilities
- Repetitive surge testing per IEEE C62.41.2 C3 combination without any degradation of more than 10% deviation. Greater than 20,000 impulses\*




# ACT 471SEL Selenium Hybrid Filter Device

A Full-Featured Primary Surge Protection/Filter Device



**ACT 471-277Y-270-SEL-D-F2**

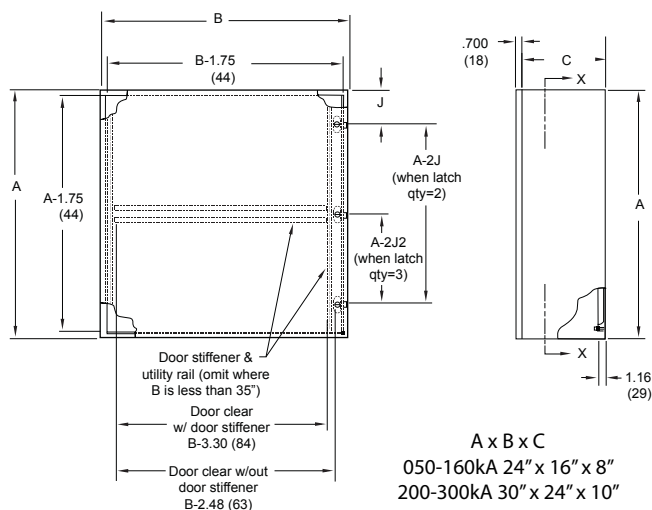

\*Full mechanical drawings available upon request.

## TECHNICAL INFORMATION

### MECHANICAL SPECIFICATIONS

Dimensions 050, 100, 160 – 24x16x8 (in)  
200, 270, 300 – 30x24x10 (in)

Weight (determined by option) Up to 110 lbs.

Enclosure NEMA 12/4 Painted Steel

Operating Temp -40°F to +140°F  
-40°C to +65°C

Non-condensing Humidity 5% to 95%

### ELECTRICAL SPECIFICATIONS

UL Type 1 with fused disconnect option

Connection Method Parallel

Protection Modes All Modes (L-N, L-G, N-G, L-L)

Wired Lugs Up to 2 AWG

Status Indicators Working - Green LED's  
Alarm - Red LED

Dual Alarm Relay Contacts Form C NC & NO

Audible Alarm Turn On/Off Switch

Dual Surge Counters Continuous & Resettable

Filter (3kHz – 10MHz) >-50dB

Part Number	Configuration	MCOV	VPR (Voltage Protection Rating) – IEEE C62 UL 1449 4th Edition			
			L-N	L-G	N-G	L-L
471-120S-XXX-SEL-YY	120/240 Vac 3W+G	150V	700	700	700	1000
471-120Y-XXX-SEL-YY	120/208 Vac 4W+G	150V	700	700	700	1000
471-277Y-XXX-SEL-YY	277/480 Vac 4W+G	320V	1000	1000	1000	1800
471-240D-XXX-SEL-YY	240 Vac 3W+G, delta	320V	-	1000	-	1800
471-240H-XXX-SEL-YY	120/240 Vac 4W+G, delta HL PHB	150V/320V	700/1000	700/1000	1000	1000/1800
471-480D-XXX-SEL-YY	480 Vac 3W+G, delta	600V	-	1800	-	3000

#### EXAMPLE: ACT 471-277Y-160-SEL-D-F-C2-M2

Industrial Series SPD, 277/480 Vac 4W+G, 160 kA/ Mode, Modular Selenium Hybrid Filter/ Protector at 160kA/Mode, Internal Disconnect, EMI/Noise Filter, 2 Surge Counters, V2 option on the Power Quality Meter

#### OPTIONS:

**XXX** Surge Rating (kA) by Mode: 050, 080, 100, 125, 160, 200, 270 or 300  
**SEL** Modular Selenium Hybrid Filter/Protector NEMA 12/4 (STANDARD)  
 Aluminum - **ALM**  
 Stainless Steel - **SS**  
**YY** Enclosure Type:  
 Internal Disconnect: 600V 100 Amp Quick Fuse- **D**  
 Filter(s): EMI/Noise Filter - **F**  
 Advanced EMI/Noise Filter - **FA1 or FA2**  
 Counter(s): Surge Counter - **C1 or C2**  
 Continuous or Resettable  
 Microprocessor-based PQ Meter: **M 2-6** number refers to V option  
 (See ACT M200 specification sheet)




# ACT 471SEL Selenium Hybrid Filter Device

A Full-Featured Primary Surge Protection/Filter Device

## ▶ PRODUCT SURGE TEST DATA

Voltage Configuration	Protection Mode	MCOV	A1 Ring Wave	B3 Ring Wave	B3/C1 Combo	C3 Combo	UL1449 4th edition
			2kV/67A	6kV/500A	6kV/3kA	20kV/10kA	6kV/ 3kA
1P 240V	L-N	320V	46.7	460	932V	1100V	1000 V
	L-G	320V	46.5	472	950V	1200V	1000 V
	N-G	320V	52	468	950V	1150V	1000 V
120/240	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
120/240 with 240V High Leg	L-N	150V	46	460	528V	1000V	700V
	L-N High	320V	46.7	547	932V	1100V	1000 V
	N-G	150V	52	468	580V	1075V	700V
120/208	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
220/380	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	47.2	520	950V	1200V	1000 V
	N-G	320V	53	560	950V	1150V	1000 V
277/480	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	46.5	520	950V	1200V	1000 V
	N-G	320V	52	560	950V	1150V	1000 V
240D	L-G	320V	58	547	950V	1105V	1000 V
	L-L	640V	64	1100	1820V	2390V	1800V
380D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V
480D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V

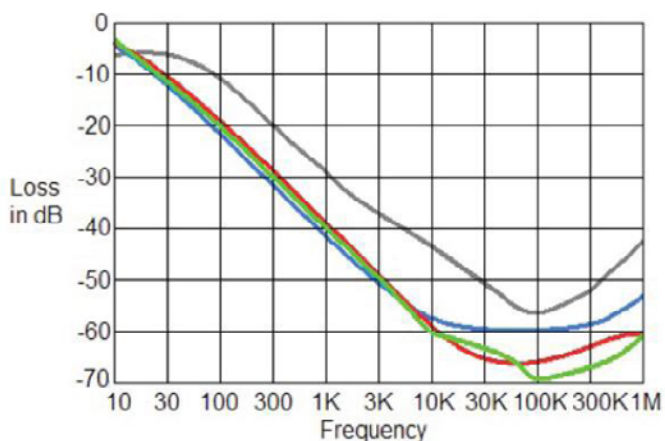

ACT's Advanced Power Filter system is designed to filter frequencies between 3 kHz to 1 Mhz using a broad spectrum band reject filter that out performs most SPD EMI filters on the market. NEMA LS-1 requires evidence of band rejection across a stated spectrum, be sure your EMI filter specification leaves no frequency holes.

**\*Red & Green lines represent the Advanced Filter Option when compared to leading filter manufacturers.**


\*Tests were conducted with Power Filters installed

# ACT 471SEL Selenium Hybrid Filter Device


A Full-Featured Primary Surge Protection/Filter Device

## COMMON ELECTRICAL APPLICATIONS


### Single Phase, 3-Wire (with Neutral)

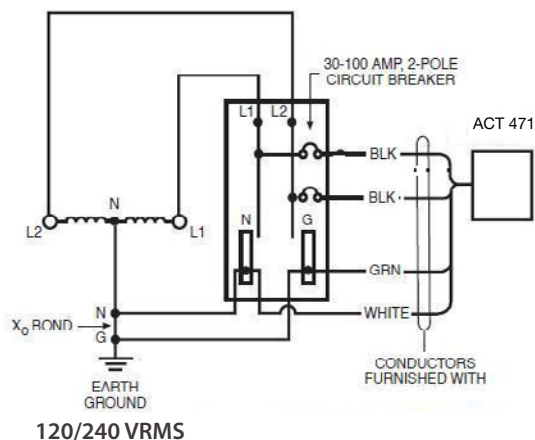

### 3-Phase, 4-Wire WYE

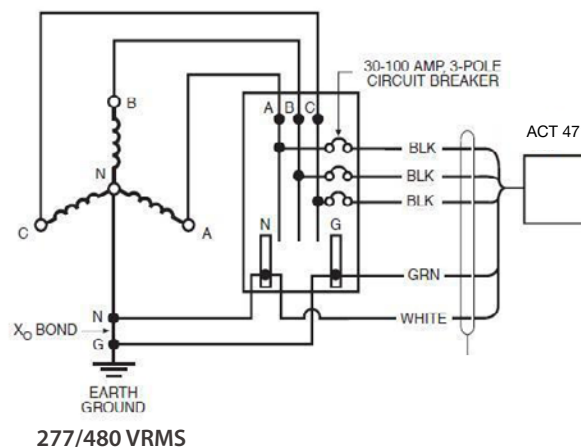

### 3-Phase, 3-Wire +Ground DELTA

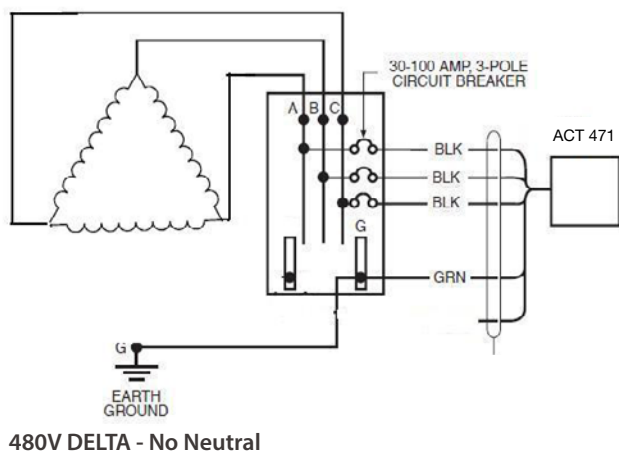

## CAUTION:

It is extremely important to know the true voltage on any power panel that a Surge Protection Device is being specified for. If Electrical 1 – Lines do not exist, then it is important for an electrician to verify if the power panel to be protected is 277/480V 4W+G versus 480V 3W+G. While both products look similar, they will only operate correctly if installed in its intended voltage application. Placing any SPD on a 480V Delta system that is not designed for it can cause serious damage to both power filters and SPD devices.

# ACT 471 Surge Seeker Family

## A Full-Featured Primary Surge Protection/Filter Device



- ▶ Power quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment. The ACT 471 Surge Seeker Family is the perfect design to protect your sensitive electrical and electronic environments. This full-featured filter protector protects all phases and modes against transient surges and, with the filter option, is able to reduce induced noise by over 50 dB. **No other company offers as much power quality protection.**

### ▶ RECOMMENDED LOCATION

- Building Entrance / Cat C
- Primary Surge Protection for a Facility
- Switch Gear
- Motor Control Center

### ▶ FEATURES AND BENEFITS

- Listed to Type 1 and Type 2
- 200 kAIC rated Fuse or Optional Fused Disconnect
- Up to 300,000 amps per mode modular protection (600,000 per Phase)
- **BEST** built in Filter options in the market
  - Advanced filter targets most common transient surges and damaging medium frequency noises -55dB
- Copper Bus Connected Surge Modules
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
  - 7 Modes Discrete (L-N, L-G, N-G)
- Dual Surge Counter Options (Continuous and Resettable)
- Smart Monitoring
  - Diagnostic board not only tells you Good & Bad Phase protection but also what module needs replaced
- Dual NO / NC Form C Dry Contacts
  - For remote monitoring & control (250V 5A rating)
- Individually Fused and Protected MOV Technology
- NEMA 4 & NEMA 12 Painted Steel Enclosure
- 10 Year Standard Warranty – Options with extended warranty card

### MOST ADVANCED MONITORING SYSTEM ON THE MARKET

- Lights (LED) – Green per phase, Red - Alarm
- Audible Alarms
- Relay Dual NO / NC Form C Dry Contacts
- Dual Surge Counters (optional)
- Microprocessor-based Power Quality Meter (optional)
- Logging Capability (optional)
- Event Waveform Capture (optional)

### ▶ STANDARDS MET

- Safety – Listed to UL 1449 4th edition March 2016
- Noise Filtering – UL 1283
- ANSI/NFPA 70 National Electrical Code

### ▶ 3RD PARTY TESTED


- ACT 471 is tested in all modes at rated currents by independent testing facilities
- Repetitive surge testing per IEEE C62.41.2 C3 combination without any degradation of more than 10% deviation. Greater than 17,000 impulses\*

# ACT 471 Surge Seeker Family

A Full-Featured Primary Surge Protection/Filter Device



**ACT 471-277Y-240-FA1-M6**

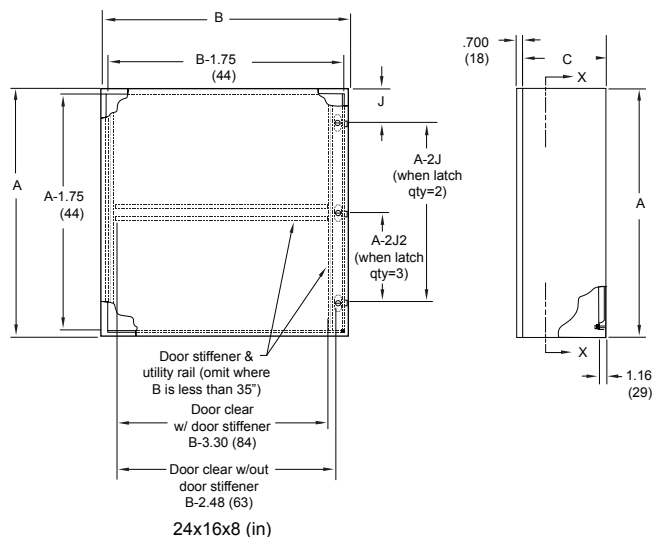

## TECHNICAL INFORMATION

### MECHANICAL SPECIFICATIONS

Dimensions	24x16x8 (in)
Weight (determined by option)	Up to 65 lbs.
Enclosure	NEMA 12/4 Painted Steel
Operating Temp	-40°F to +140°F -40°C to +65°C
Non-condensing Humidity	5% to 95%

### ELECTRICAL SPECIFICATIONS

UL Type 1	with fused disconnect option
Connection Method	Parallel
Discrete Protection Modes (7 Modes)	L-N, L-G, N-G
Wired Lugs	Up to 2 AWG
Status Indicators	Working - Green LED's Alarm - Red LED
Dual Alarm Relay Contacts	Form C NC & NO (240V 5A)
Audible Alarm	Turn On/Off Switch
Dual Surge Counters	Continuous & Resettable
Filter (3kHz – MHz)	>-50dB

Part Number	Configuration	MCOV	VPR (Voltage Protection Rating) – IEEE C62 UL 1449 4th Edition			
			L-N	L-G	N-G	L-L
471-120S-XXX-YY	120/240 Vac 3W+G	150V	700	700	700	1000
471-120Y-XXX-YY	120/208 Vac 4W+G	150V	700	700	700	1000
471-277Y-XXX-YY	277/480 Vac 4W+G	320V	1000	1000	1000	1800
471-240D-XXX-YY	240 Vac 3W+G, delta	320V	-	1000	-	1800
471-240H-XXX-YY	120/240 Vac 4W+G, delta HL PHB	150V/320V	700/1000	700/1000	1000	1000/1800
471-480D-XXX-YY	480 Vac 3W+G, delta	600V	-	1800	-	3000

**EXAMPLE: ACT 471-277Y-160-D-F-C2-M2**

Industrial Series SPD, 277/480 Vac 4W+G, 160 kA/ Mode, Internal Disconnect, EMI/Noise Filter, 2 Surge Counters, V2 option on the Power Quality Meter

**OPTIONS:**


- XXX** Surge Rating (kA) by Mode: 050, 080, 100, 125, 160, 200, 240 or 300
- YY** Enclosure Type: NEMA 12/4 Painted Steel (STANDARD)  
Aluminum - **ALM**  
Stainless Steel - **SS**
- Internal Disconnect: 600V 100 Amp Quick Fuse- **D**
- Filter(s): EMI/Noise Filter - **F**  
Advanced EMI/Noise Filter - **FA1 or FA2**
- Counter(s): Surge Counter - **C1 or C2**  
(Continuous or Resettable)
- Microprocessor-based PQ Meter: **M 2-6** number refers to V option  
(See ACT M200 specification sheet)

# ACT 471 Surge Seeker Family

A Full-Featured Primary Surge Protection/Filter Device

## ▶ PRODUCT SURGE TEST DATA

Voltage Configuration	Protection Mode	MCOV	A1 Ring Wave	B3 Ring Wave	B3/C1 Combo	C3 Combo	UL1449 4th edition
			2kV/67A	6kV/500A	6kV/3kA	20kV/10kA	6kV/ 3kA
1P 240V	L-N	320V	46.7	460	932V	1100V	1000 V
	L-G	320V	46.5	472	950V	1200V	1000 V
	N-G	320V	52	468	950V	1150V	1000 V
120/240	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
120/240 with 240V High Leg	L-N	150V	46	460	528V	1000V	700V
	L-N High	320V	46.7	547	932V	1100V	1000 V
	N-G	150V	52	468	580V	1075V	700V
120/208	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
220/380	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	47.2	520	950V	1200V	1000 V
	N-G	320V	53	560	950V	1150V	1000 V
277/480	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	46.5	520	950V	1200V	1000 V
	N-G	320V	52	560	950V	1150V	1000 V
240D	L-G	320V	58	547	950V	1105V	1000 V
	L-L	640V	64	1100	1820V	2390V	1800V
380D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V
480D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V

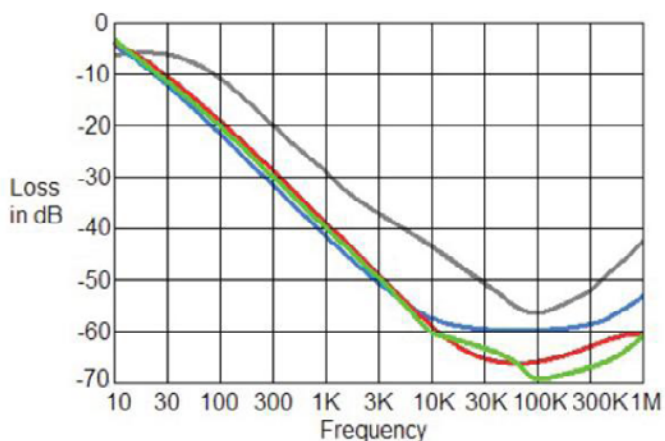

ACT's Advanced Power Filter system is designed to filter frequencies between 3 kHz to 1 Mhz using a broad spectrum band reject filter that out performs most SPD EMI filters on the market. NEMA LS-1 requires evidence of band rejection across a stated spectrum, be sure your EMI filter specification leaves no frequency holes.

\*Red & Green lines represent the Advanced Filter Option when compared to leading filter manufacturers.


\*Tests were conducted with Power Filters installed

# ACT 471 Surge Seeker Family


A Full-Featured Primary Surge Protection/Filter Device

## COMMON ELECTRICAL APPLICATIONS


### Single Phase, 3-Wire (with Neutral)

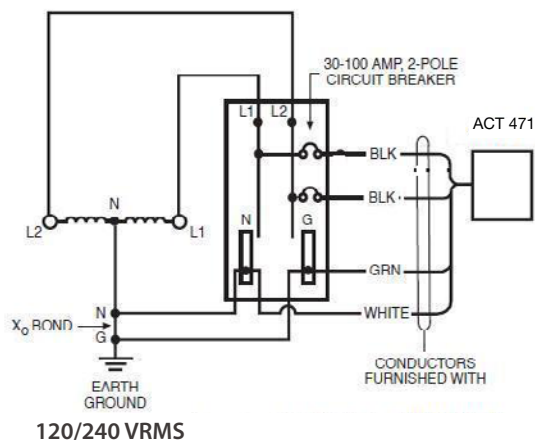

### 3-Phase, 4-Wire WYE

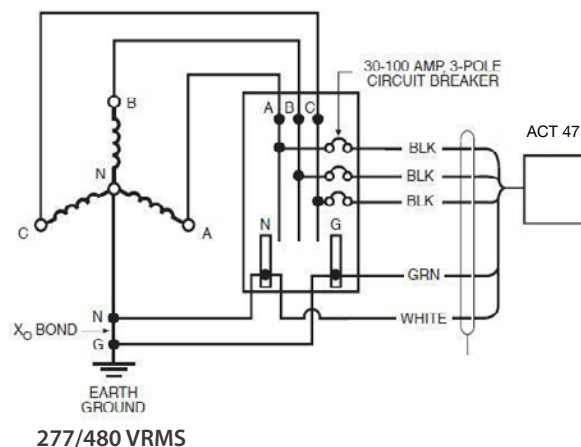

### 3-Phase, 3-Wire +Ground DELTA

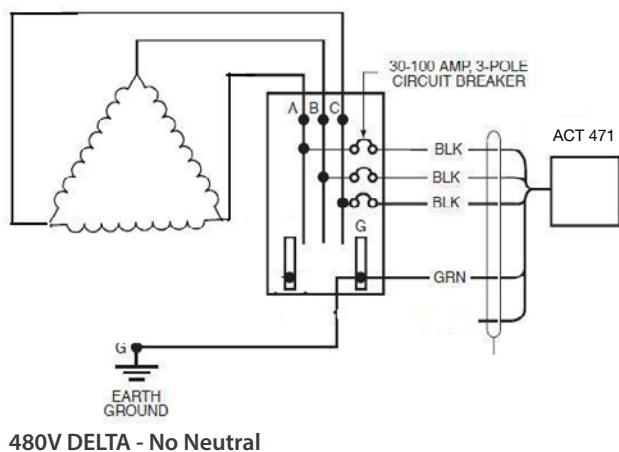

## CAUTION:

It is extremely important to know the true voltage on any power panel that a Surge Protection Device is being specified for. If Electrical 1 – Lines do not exist, then it is important for an electrician to verify if the power panel to be protected is 277/480V 4W+G versus 480V 3W+G. While both products look similar, they will only operate correctly if installed in its intended voltage application. Placing any SPD on a 480V Delta system that is not designed for it can cause serious damage to both power filters and SPD devices.



# ACT Surge Stryker 455 Family

## 7-Mode Hardwired Primary AC Surge Protection Device



▶ The Full Featured Surge Stryker Family is a high performance surge protector designed for critical panel locations. The SPD incorporates high-energy MOVs with the best performing AC filter on the market to provide protection against transients originating from induced lightning strikes, utility switching and facility power noise.

Real-time diagnostics include LED fault indicators for each phase, as well as an optional alarm that includes red LED, dual Form C dry contacts for remote indication and an audible alarm, so you always know the Surge Stryker Protector is at full capacity.

The ACT 455 Family is available for all voltages and configurations up to 480Vac. Housed in a rugged NEMA 12 enclosure, these devices are suitable for harsh indoor or outdoor applications.

### ▶ RECOMMENDED LOCATION

- Type 2 Location
- Cell Sites, Well Pumps / Cat C
- Distribution Equipment / Cat B
- Branch Panels / Cat B
- Point of Use / Cat A
- Residential / Cat C

### ▶ AC PANEL PROTECTION

- Available in 050, 080, 100, 160, 200, 300 kA per modes
- 7 modes of discrete protection (L-N, L-G, N-G)
- 10 modes of protection (L-N, L-G, N-G, L-L)
- 200 kAIC Fault Current Rating
- Advanced EMI/RFI Noise Filtering (-45dB) 3kHz - 1MHz
- 5-Year warranty (10-year optional)
- 3rd Party Tested - 15,000 (C3 20 kV/10 kA)
- Optional 30amp fuse allows direct connect to power bus

### ▶ CHARACTERISTICS

Surge Handling (Imax)	Up to 300 kA/mode 600 kA/phase
7 Modes of Discrete Protection	L-N, L-G, N-G
10 Modes of Protection	L-N, L-G, N-G, L-L
Response Time	<5 nanoseconds MOV Technology
Green LED Indicators	Yes
EMI/RFI Noise Rejection (option)	-45dB and -55dB (see chart)
Surge Counter (s) (option)	8-digit resettable transient counter
Alarms	
Red LED (option)	Yes
Remote Signalling	Form C dry contacts – NC & NO
Audible (option)	With Shut-off Switch

### ▶ STANDARDS & GUIDELINES

Listed by ETL for UL 1449 4th edition	USA
ANSI/IEEE C62.41	USA
Listed by ETL for UL 1283 Power Filters	USA
3rd Party to IEC61643-11 CE Mark International	

### ▶ FEATURES AND OPTIONS

#### EXAMPLE: ACT 455-277Y-100-F-A-C1

Surge Rating (kA) by Mode:	050, 080, 100, 125, 160, 200, 300
Surge Rating (kA) by Phase:	100, 160, 200, 250, 320, 400, 600
Enclosure Type:	Painted Steel NEMA 12 Standard no option code Stainless Steel - SS
Optional Alarms	Alarm LED, Remote Relay & Audible – A
Optional Filter	-45 dB EMI / Noise Filter – F -55 dB Advanced EMI / Noise Filter – FA
Optional Counter(s)	Surge Counter(s) – C1 (resettable), C2 (Dual-fixed and resettable)
Optional External Fused Disconnect*	600V 30Amp fuse – D
Optional Mounting	Top Feed – T

\*See ACT 455-D Cut Sheet




# ACT Surge Stryker 455 Family

## 7-Mode Hardwired Primary AC Surge Protection Device

Part Number	Configuration	MCOV	VPR (Voltage Protection Rating) IEEE C62 – UL 1449 4th Edition			
			L-N	L-G	N-G	L-L
455-120S-XXX	120/240 Vac 3W+G	150V	700	700	700	1000
455-120Y-XXX	120/208 Vac 4W+G	150V	700	700	700	1000
455-277Y-XXX	277/480 Vac 4W+G	320V	1000	1000	1000	1800
455-240D-XXX	240 Vac 3W+G, delta	320V	-	1000	-	1800
455-240H-XXX	120/240 Vac 4W+G, delta HL PHB	150V/320V	700/1000	700/1000	1000	1000/1800
455-480D-XXX	480 Vac 3W+G, delta	600V	-	1800	-	3000

7 Mode 455 Model Numbers		
Model No.	System Voltage	Service Configuration
455-120-XXX	120 VAC	1 PHASE, 2 WIRE, W/GROUND
455-240-XXX	240 VAC	1 PHASE, 2 WIRE, W/GROUND
455-120S-XXX	120/240 VAC	1 PHASE, 3 WIRE SPLIT PHASE, W/GROUND
455-120Y-XXX	120/208 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-220Y-XXX	220/380 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-277Y-XXX	277/480 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-240H-XXX	120/240 VAC B PHASE IS 208V	3 PHASE, HIGH-LEG DELTA, W/GROUND
455-240D-XXX	240VAC	3 PHASE, 3 WIRE DELTA, W/GROUND
455-380D-XXX	380 VAC	3 PHASE, 3 WIRE DELTA, W/GROUND
455-480D-XXX	480 VAC	3 PHASE, 3 WIRE DELTA, W/GROUND


- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment. The ACT 455 Family of surge protectors is the perfect design to protect your sensitive electrical and electronic environments.

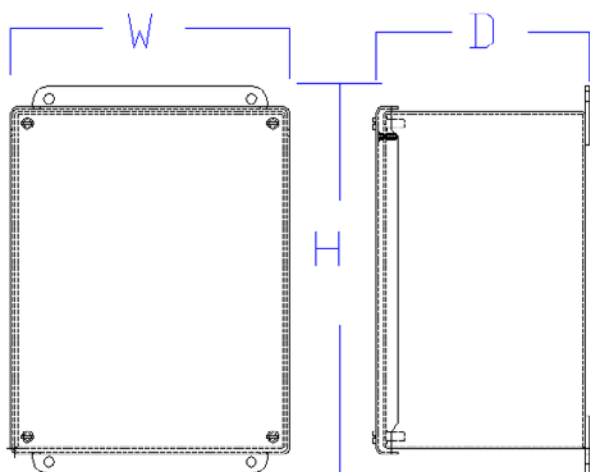

## TECHNICAL INFORMATION

### ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Discrete Protection Modes (7)	L-N, L-G, N-G
Protection Modes (10 Modes)	L-N, L-G, L-L, N-G
Pre-Wired	36" Stranded #10 AWG
Status Indicators	Green LED
Optional EMI Filter	-45 dB Noise Reduction
Optional Advanced EMI Filter	-55 dB Noise Reduction
Optional Alarm Relay Contacts	Form C NC & NO
Optional Red LED	Indicates Red when unit is in alarm
Optional Audible Alarm with Silence Switch	Piezo Buzzer

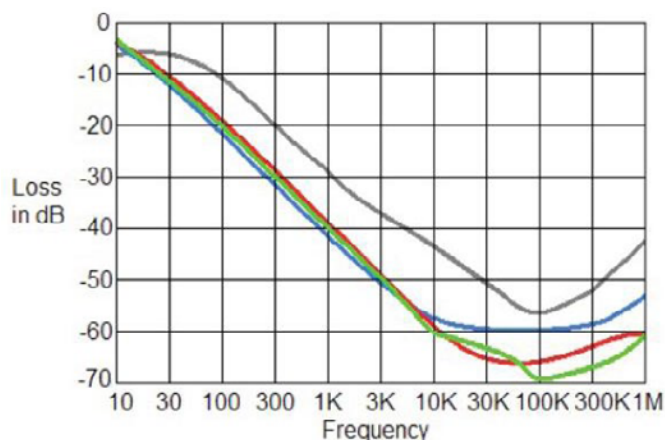

Red & Green lines represent the Advanced Filter Option when compared to leading filter manufacturers.

Blue and Grey lines represent popular competitors.

### DIMENSIONAL SPECIFICATIONS

Dim	ACT 455 – with Special Options*		Dim	ACT 455 – 50, 80, 100, 125, 160, 200	
H	15.50	(393.7)	H	10.00	(254)
W	12.00	(304.8)	W	8.00	(203.2)
D	6.20	(157.5)	D	6.00	(154.2)

\*With Advanced Filter Option AND Fused Disconnect ordered together.

ALL MEASUREMENTS IN INCHES (MM)

### MECHANICAL SPECIFICATIONS

Weight	25 lbs
Standard Enclosure	Painted Steel NEMA 12
Operating Temp	-40C to +65C
Non-condensing Humidity	5% to 95%
Bottom Fed is Standard – Top Fed is Option Code – T	
100% Sanded for Increased Safety	

# ACT Surge Stryker 455 Family

## 7-Mode Hardwired Primary AC Surge Protection Device


### ▶ PRODUCT SURGE TEST DATA

Voltage Configuration	Protection Mode	MCOV	A1 Ring Wave	B3 Ring Wave	B3/C1 Combo	C3 Combo	UL1449 4th Edition
			2kV/67A	6kV/500A	6kV/3kA	20kV/10kA	6kV/ 3kA
1P 240V	L-N	320V	46.7	460	932V	1100V	1000 V
	L-G	320V	46.5	472	950V	1200V	1000 V
	N-G	320V	52	468	950V	1150V	1000 V
120/240	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
120/240 with 240V High Leg	L-N	150V	46	460	528V	1000V	700V
	L-N High	320V	46.7	547	932V	1100V	1000 V
	N-G	150V	52	468	580V	1075V	700V
120/208	L-N	150V	46	460	528V	1000V	700V
	L-G	150V	46.5	472	534V	1050V	700V
	N-G	150V	52	468	580V	1075V	700V
220/380	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	47.2	520	950V	1200V	1000 V
	N-G	320V	53	560	950V	1150V	1000 V
277/480	L-N	320V	46.7	547	932V	1100V	1000 V
	L-G	320V	46.5	520	950V	1200V	1000 V
	N-G	320V	52	560	950V	1150V	1000 V
240D	L-G	320V	58	547	950V	1105V	1000 V
	L-L	640V	64	1100	1820V	2390V	1800V
380D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V
480D	L-G	550V	58	1058	1741V	1924V	1800V
	L-L	1100V	82	2100	2331V	3250V	2500V


# ACT Surge Stryker 455 Family

## 7-Mode Hardwired Primary AC Surge Protection Device


**Figure 1 3 Phase Delta 3W +Ground**

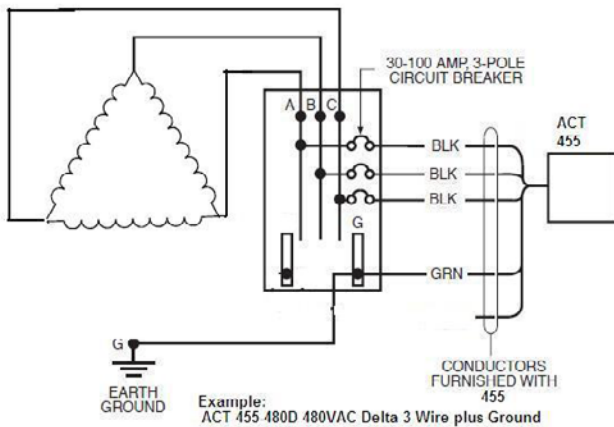


**FIG. 2: Single Phase, 3-Wire (With Neutral)**

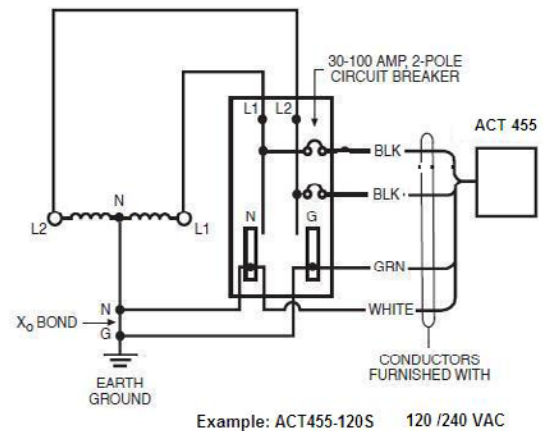

**FIG. 3: 3-Phase, 4-Wire WYE**

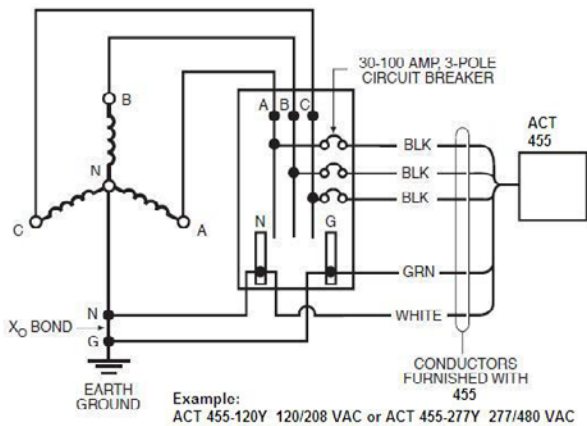

**FIG. 4: 1-Phase, 2-Wire (Normal)**

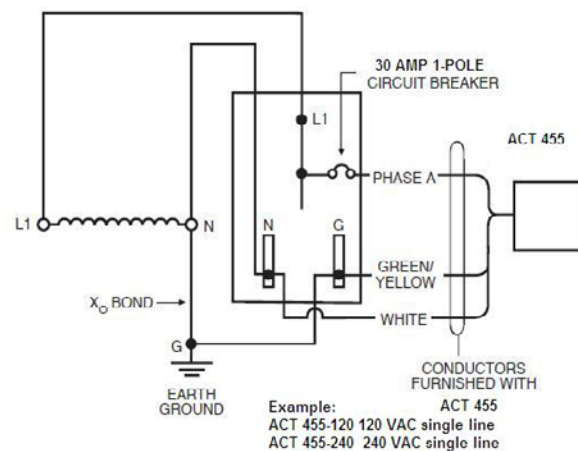

# ACT Surge Stryker 455 LT Family

## 7-Mode Hardwired Primary AC Surge Protection Device



▶ The Surge Stryker LT Family is a high performance surge protector designed for critical panel locations. The SPD incorporates high-energy MOVs with the best performing AC filter on the market to provide protection against transients originating from induced lightning strikes, utility switching and facility power noise.

Real-time diagnostics include LED fault indicators for each phase, as well as an optional alarm that includes red LED, dual Form C dry contacts for remote indication.

Housed in a rugged resin NEMA 12/4X enclosure, these devices are suitable for harsh indoor or outdoor applications. The ACT 455 LT Family is available for all voltages and configurations up to 480Vac.

### EXAMPLE: ACT 455-277Y-100-LT-R

Wall mounted protector at 100kA/mode with remote alarm relay.

#### ▶ RECOMMENDED LOCATION

- Type 2 Location
- Cell Sites, Well Pumps / Cat C
- Distribution Equipment / Cat B
- Branch Panels / Cat B
- Point of Use / Cat A
- Residential / Cat C

#### ▶ AC PANEL PROTECTION

- Available in 050, 080, 100 kA per modes
- All modes of protection (L-N, L-G, N-G, L-L)
- 200 kAIC Fault Current Rating
- Advanced EMI/RFI Noise Filtering (-45dB) 3kHz - 1MHz
- 2-year warranty (5-year optional)
- 3rd Party Tested - 15,000 (C3 20 kV/10 kA)

#### ▶ CHARACTERISTICS

Surge Handling (Imax)	Up to 100 kA/mode 200 kA/phase
All Mode Protection (10 modes)	L-N, L-G, N-G, L-L
Response Time	<5 nanoseconds MOV Technology
Green LED Indicators	Yes
EMI/RFI Noise Rejection (option)	-45dB
Optional Alarms Red LED	Yes
Remote Signalling	Form C dry contacts – NC & NO

#### ▶ STANDARDS & GUIDELINES

Listed by ETL for UL 1449 4th edition	USA
ANSI/IEEE C62.41	USA
Listed by ETL for UL 1283 Power Filters	USA
3rd Party to IEC61643-11 CE Mark International	

#### ▶ FEATURES

Surge Rating (kA) by Mode:	050, 080, 100	
Surge Rating (kA) by Phase:	100, 160, 200	
Enclosure Type:	Resin NEMA 12/4X – Standard no option code	
Optional Alarms	Alarm LED, Remote Relay	– R
Optional Filter	-45 dB EMI / Noise Filter	– F
Optional Mounting	Top Feed	– T

# ACT Surge Stryker 455 LT Family

## 7-Mode Hardwired Primary AC Surge Protection Device

Part Number	Configuration	MCOV	VPR (Voltage Protection Rating) IEEE C62 – UL 4th Edition			
			L-N	L-G	N-G	L-L
455-120S-XXX	120/240 Vac 3W+G	150V	700	700	700	1000
455-120Y-XXX	120/208 Vac 4W+G	150V	700	700	700	1000
455-277Y-XXX	277/480 Vac 4W+G	320V	1000	1000	1000	1800
455-240D-XXX	240 Vac 3W+G, delta	320V	-	1000	-	1800
455-240H-XXX	120/240 Vac 4W+G, delta HL PHB	150V/320V	700/1000	700/1000	1000	1000/1800
455-480D-XXX	480 Vac 3W+G, delta	600V	-	1800	-	3000

7 Mode 455 Model Numbers		
Model No.	System Voltage	Service Configuration
455-120-XXX	120 VAC	1 PHASE, 2 WIRE, W/GROUND
455-240-XXX	240 VAC	1 PHASE, 2 WIRE, W/GROUND
455-120S-XXX	120/240 VAC	1 PHASE, 3 WIRE SPLIT PHASE, W/GROUND
455-120Y-XXX	120/208 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-220Y-XXX	220/380 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-277Y-XXX	277/480 VAC	3 PHASE, 4 WIRE WYE, W/GROUND
455-240H-XXX	120/240 VAC B PHASE IS 208V	3 PHASE, HIGH-LEG DELTA, W/GROUND
455-240D-XXX	240VAC	3 PHASE, 3 WIRE DELTA, W/GROUND
455-380D-XXX	380 VAC	3 PHASE, 3 WIRE DELTA, W/GROUND
455-480D-XXX	480 VAC	3 PHASE, 3 WIRE DELTA, W/GROUND

## TECHNICAL INFORMATION

### ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Discrete Protection Modes (7)	L-N, L-G, N-G
Protection Modes (10 Modes)	L-N, L-G, L-L, N-G
Pre-Wired	36" Stranded #10 AWG
Status Indicators	Green LED
Optional EMI Filter	-45 dB Noise Reduction
Optional Alarm Relay Contacts	Form C NC & NO
Optional Red LED	Indicates Red when unit is in alarm


### DIMENSIONAL SPECIFICATIONS

Dim	ACT 455 – 50, 80, 100, 125, 160, 200
H	8.00
W	6.00
D	5.00


### MECHANICAL SPECIFICATIONS

Weight	10 lbs
Standard Enclosure	Resin NEMA 12 / 4X
Operating Temp	-40C to +65C
Non-condensing Humidity	5% to 95%
Bottom Fed is Standard – Top Fed is Option Code – T	
100% Sanded for Increased Safety	

### Single Phase, 3-Wire (with neutral)

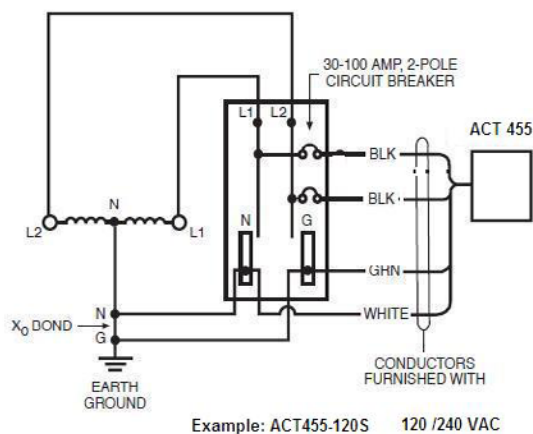

### 3-Phase, 4-Wire WYE

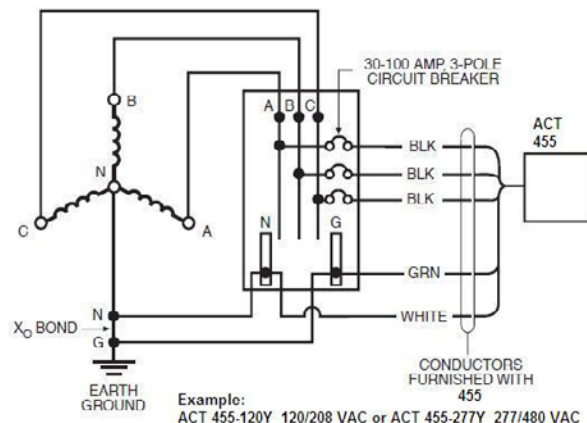

# ACT Surge Stryker 453 Family

A Wall Mounted Surge Protection Device



- ▶ The Full Featured ACT Surge Stryker 453 Family is a high performance surge protector designed for critical panel locations. The SPD incorporates high-energy MOVs with the optional EMI/RFI noise filtering to provide protection against transients originating from induced lightning strikes and utility switching.

Real time diagnostics include LED fault indicators for each phase and optional Form C dry contacts for remote indication allows the customer to always know the ACT 453 is at full capacity.

Housed in a rugged NEMA 12 enclosure these indoor devices are suitable for harsh indoor or covered applications. The ACT 453 Family is available for all voltages and configurations up to 480Vac with per mode surge ratings from 50kA to 100kA and is available with remote signaling contacts and filtering that removes noise down to -40dB.

## ▶ RECOMMENDED LOCATION

- Cell Sites, Well Pumps / Cat C
- Distribution Equipment / Cat B
- Branch Panels / Cat B
- Point of Use / Cat A
- Residential / Cat C

## ▶ FEATURES AND BENEFITS

- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status indicating Lights per phase
- NO/NC Form C Dry Contact option for remote monitoring
- Optional Filter removes noise down to -40dB @ MHz
- Individually Fused MOV Technology
- 2 -Year Standard Warranty

## ▶ STANDARDS MET

- Safety – Listed for UL 1449 4th edition
- Safety - Meets UL 1283 when filter is installed
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

## ▶ 3RD PARTY TESTED

- ACT 453 is tested in all modes at rated currents by independent testing facilities
- Repetitive surge testing per IEEE C62.41.2 C3 combination without any degradation of more than 10% deviation. Greater than 10,000 impulses\*
- NEMA LS-1 Tested



# ACT TransShield 453 Family

A Wall Mounted Surge Protection Device

## TECHNICAL INFORMATION

### MECHANICAL SPECIFICATIONS

Dimensions	8" H X 6" W X 3.5" D
Weight	7.5 lbs.
Enclosure	NEMA 4
Operating Temp	-40C to +65C
Non-condensing Humidity	5% to 95%



### ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Protection Modes (10Modes)	L-N, L-G, L-L, N-G
Discrete Protection	L-N, N-G
Pre-Wired	36" stranded #10 AWG
Status Indicators	Green LED
Optional Alarm Relay Contacts	Form C NC & NO
Optional filter	-40dB noise reduction

**EXAMPLE:** ACT 453-120S-100 or  
ACT 453-277Y-080-R-F

**OPTIONS:**

kA rating	50kA	050
	80kA	080
	100kA	100

Alarm Relay Contacts	Form C NC & NO – R
EMI/Noise Filter	EMI/Noise Filter (>-40db) – F
Top Fed	Cables oriented from top – T

Part Number 453-Voltage-kA Rating-Options	Configuration	VPR (Voltage Protection Rating)				MCOV
		L-N	L-G	N-G	L-L	
453-120-XXX	120Vac, 1ph, 2W+G	700	1200	700	1000	150
453-120S-XXX	120/240Vac, 1ph, 3W+G, Split Phase	700	1200	700	1000	150
453-120Y-XXX	120/208Vac, 3ph, 4W+G, Wye	700	1200	700	1000	320
453-220Y-XXX	220/380Vac, 3ph, 4W+G, Wye	1000	1800	1000	1800	150
453-240-XXX	240Vac, 1ph, 2W+G	1000	1800	1000	1800	320
453-240H-XXX	120/220/240Vac, 3ph, 4W+G, Hi-Leg	700/1000	2000	1000	1000/1800	150/320
453-240Y-XXX	240/415Vac, 3ph, 4W+G, Wye	1000	1800	1000	1800	320
453-240D-XXX	240Vac, 3ph, 3W+G, Delta	-	1000	-	1800	320
453-277Y-XXX	277/480Vac, 3ph, 4W+G, Wye	1000	1800	1000	1800	320
453-480-XXX	480Vac, 1ph, 2W+G	1800	3200	1800	3000	575
453-480D-XXX	480Vac, 3ph, 3W+G, Delta	-	1800	-	3000	575



# ACT TransShield 452 Family

## A Wall Mounted Surge Protection Device



- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment.

The ACT TransShield 452 type design has been protecting millions of dollars of telecom and commercial equipment for over 20 years and is the perfect product to protect your electrical and electronic environments.

The TransShield protection products are a cost effective solution for any critical location in the facility from high risk sites (Telecom & Petroleum) to the Point of Use equipment like your computers.

When installed with the ACT Surge Stryker 455, you can count on a front to back facility protection system.

### ▶ RECOMMENDED LOCATION

- Type 2
- Cell Sites, Well Pumps / Cat C
- Distribution Equipment / Cat B
- Branch Panels / Cat B
- Point of Use / Cat A

### ▶ FEATURES AND BENEFITS

- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status indicating Lights per phase
- NO/NC Form C Dry Contact option for remote monitoring
- Individually Fused and Protected MOV Technology
- 1-Year Standard Warranty

### ▶ STANDARDS MET


- Safety – ETL Recognized to UL1449 4th Edition
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

### ▶ 3RD PARTY TESTED

- Survives 1,000 (C3 6kV / 3kA)

# ACT TransShield 452 Family

## DIMENSIONS

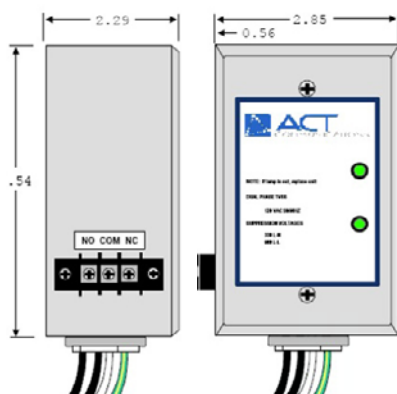


ACT 452 Single and Split Phase



ACT 452 3-Phase Unit



ACT 452 with "W" Wall mounting option



## TECHNICAL INFORMATION

### MECHANICAL SPECIFICATIONS

Dimensions	See Drawing
Weight	1.7 lbs.
Enclosure	NEMA 3R
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%

### ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Protection Modes (10 Modes)	L-N, L-G, L-L, N-G.
Pre-wired	36" stranded #10 AWG
Status Indicators	Green LED
Optional Alarm Relay Contacts	Form C NC & NO

Model	System Voltage	System Configuration	Protect Mode	MCOV	SVR	VPR
452-120-040	120V	2 Wire + G	L-N	150	500	700
			L-G	300	600	1200
452-240-040	240V	2 Wire + G	L-N	320	800	1000
			L-G	640	1300	1800
452-480-040	480	2 Wire + G	L-N	550	1500	2500
			L-G	1200	3000	3200
452-120S-040	120/240	3 Wire + G	L-N	150	500	700
			L-L	300	600	1200
452-240S-040	240/480	3 Wire + G	L-N	320	800	1000
			L-L	640	1300	1800
452-120Y-040	120/208	4 Wire + G	L-N	150	500	700
			L-G	300	600	1200
452-277Y-040	277/480	4 Wire + G	L-N	320	800	1000
			L-G	640	1300	1800
452-480D-040	480	3 Wire + G	L-G	550	3000	1800
			L-L	1150	1500	3000

EXAMPLE:

ACT 452-120-040

### OPTIONS

Surge Rating Per Mode	040 = 40kA
Remote Alarms	-R NC / NO Form C Contacts
Mounting Style	-S Side (Bottom) Fed – Std product
	-B Back Fed Option
	-W Wall Mounted Option

# ACT TransShield 452 P-Series Family

A Wall Mounted Surge Protection Device



**ACT 452-120Y-040-P**

- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment.

The ACT TransShield 452 type SPD has been protecting millions of dollars of telecom and commercial equipment for over 20 years and is the perfect product to protect your sensitive electrical and electronic environments.

The TransShield protection products are a cost effective solution for any critical location in the facility from high risk sites (Telecom & Petroleum) to the Point of Use equipment like your computers.

When installed with the ACT Surge Stryker 455 Surge Protection Device, you can count on a front to back facility protection system.

## ▶ RECOMMENDED LOCATION

- Type 2 & Type 3
- Residential Applications
- Commercial Applications
- HVAC Units
- Cell Sites, Well Pumps / Cat C
- Branch Panels / Cat B
- Point of Use / Cat A

## ▶ FEATURES AND BENEFITS

- Weather-resistant – perfect for outdoor applications
- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status indicating Lights per phase
- Individually Fused MOV Technology
- 1-Year Standard Warranty

## ▶ STANDARDS MET

- Safety – ETL Recognized to UL1449 4th Edition
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

## ▶ 3RD PARTY TESTED

- Survives 1,000 (C3 6kV / 3kA)

## TECHNICAL INFORMATION

### ▶ MECHANICAL SPECIFICATIONS


Dimensions	L 4.38" x W 3.13" x H 2.0" <i>(See Drawing)</i>
Weight	1.7 lbs.
Enclosure	NEMA 4X Plastic UL-94 VO
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%

### ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
4 Modes of Discrete Protection	L-N, N-G
Protection Modes (10 Modes)	L-N, L-G, L-L, N-G
Pre-wired	18" stranded #10 AWG
Status Indicators	Green LED


# ACT TranShield 452 P-Series Family

## DIMENSIONS

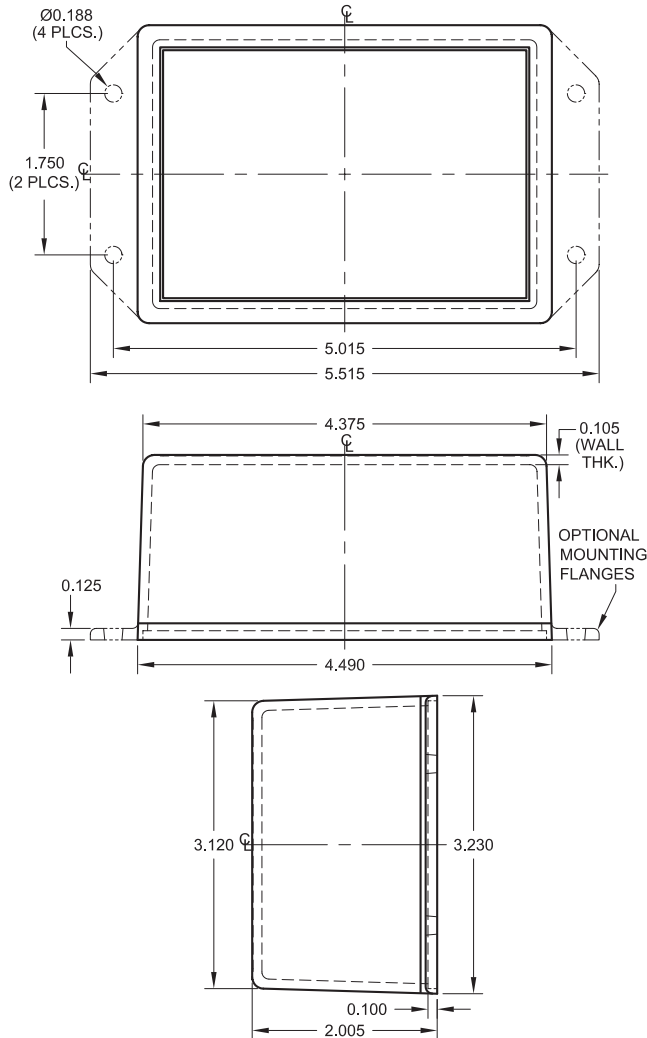


## INSTALLATION INSTRUCTIONS


### Split Phase 3W + G & Single Phase 2W + G

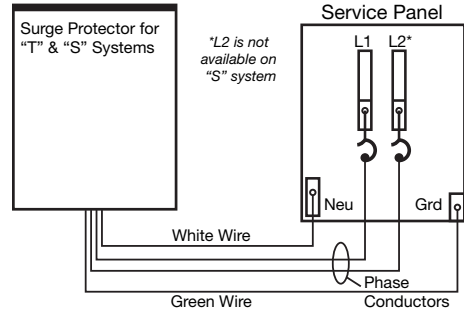

### 3 Phase 4W + G, Wye

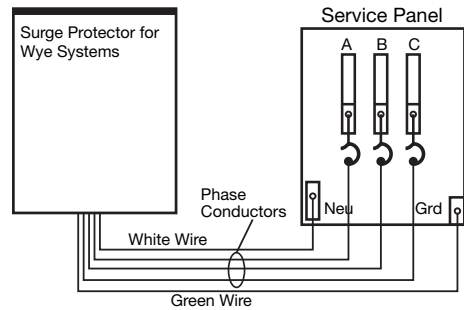

### 3 Phase 3W + G, Delta

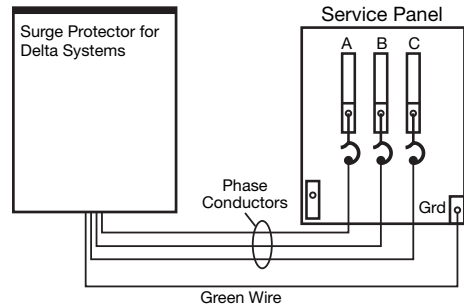

Model	System Voltage	System Configuration	Protect Mode	MCOV	SVR	VPR
452-120-040-P	120V	2 Wire + G	L-N	150	500	700
			L-G	300	600	1200
452-240-040-P	240V	2 Wire + G	L-N	320	800	1000
			L-G	640	1300	1800
452-480-040-P	480	2 Wire + G	L-N	550	1500	2500
			L-G	1200	3000	3200
452-120S-040-P	120/240	3 Wire + G	L-N	150	500	700
			L-L	300	600	1200
452-240S-040-P	240/480	3 Wire + G	L-N	320	800	1000
			L-L	640	1300	1800
452-120Y-040-P	120/208	4 Wire + G	L-N	150	500	700
			L-G	300	600	1200
452-277Y-040-P	277/480	4 Wire + G	L-N	320	800	1000
			L-G	640	1300	1800
452-480D-040-P	480	3 Wire + G	L-G	550	3000	1800
			L-L	1150	1500	3000

### EXAMPLE:

ACT 452-120-040-P  
ACT 452-120Y-040-P-F

### OPTIONS

Surge Rating Per Mode  
Enclosure Type

040 = 40kA  
-P Plastic Enclosure  
-F EMI/Noise Filter (-40 dB @ 1MHz)

# ACT TranShield 452S Series Connected Family

## Wall-Mounted Series-Connected Suppression Filter System



**452S-120S-054-F**

- ▶ Maximum protection of critical circuits that require the installation of surge protection to be the highest possible standard. The ACT 452-S type provides just that with a Kelvin connection series design.

Don't sacrifice the maximum possible protection for critical circuits using any other installation method.

The 452-S Series protection products are the electrical circuits that power sensitive and critical equipment.

### ▶ RECOMMENDED LOCATION

- Process Automation Systems
- Commercial Applications
- HVAC Systems
- Cell Sites
- Robotics
- Pumps
- Motors
- Programmable Logic Controllers

### ▶ FEATURES AND BENEFITS

- Series Kelvin Connection
- Water Resistance – Indoor Applications
- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status Indicating Light
- Individually Fused MOV Technology
- 5 Year Warranty \*See ACT warranty detail

### ▶ STANDARDS MET - SAFETY

Listed by ETL to UL 1449 4th Edition, Type 4 for Type 2 SPD applications, cUL, and UL 1283 / Compliant to IEEE C62.41.1-2002, C62.41.2-2002 and C62.45-2002 / NFPA 70 [NEC], Article 285 / RoHS Compliant / CE, IEC 61643-11-2011 / EMC Directive 2004/108/EC

### ▶ 3RD PARTY TESTED

- Survives 1,000 (C3 6kV / 3kA)

## TECHNICAL INFORMATION

### ▶ MECHANICAL SPECIFICATIONS

Dimensions	L 5.515" x W 4.75" x H 2.0" (See Drawing)
Weight	2.5 lbs.
Enclosure	NEMA 4X Plastic UL-94 VO
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%


### ▶ ELECTRICAL SPECIFICATIONS

Electrical Rating	30 Amps
Connection Method	Series
Protection Modes (10 Modes)	L-N, L-G, L-L, N-G.
Pre-wired	Series/Inline Terminal Block
Status Indicators	Green LED




# ACT TranShield 452S Series Connected Family

## DIMENSIONS

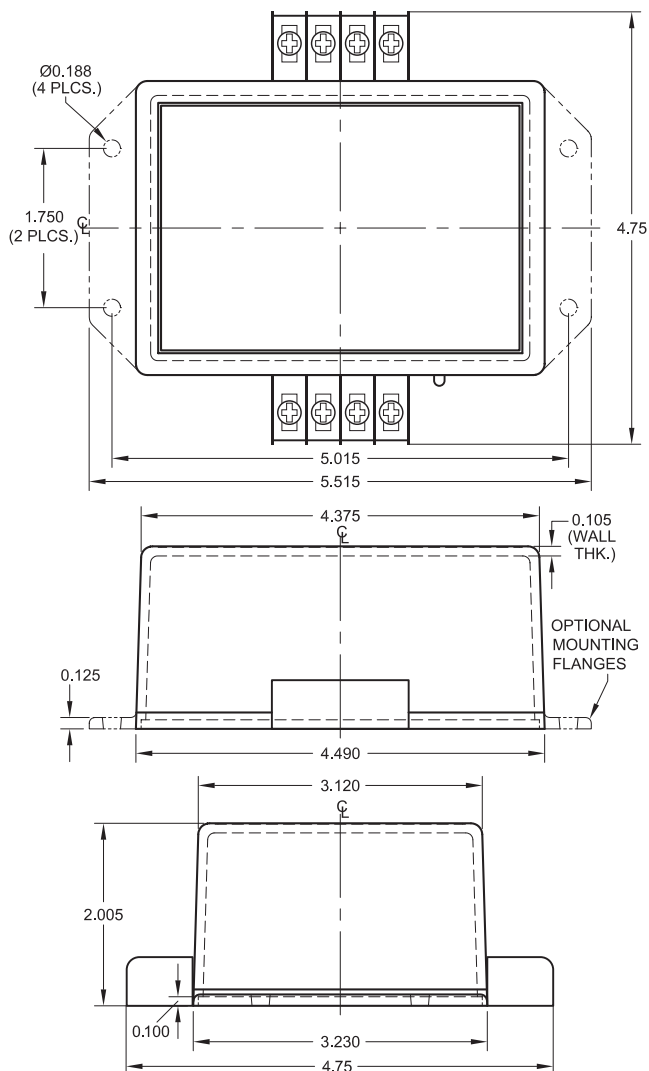

## INSTALLATION INSTRUCTIONS

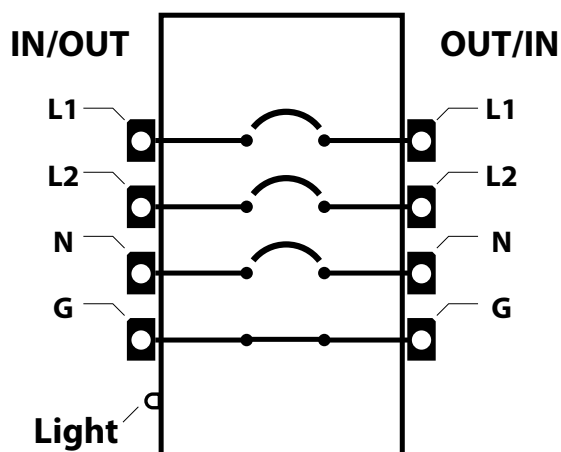

\*Unit requires a 30Amp means of disconnect  
 \*\*Noise filter EMI/RFI > -40dB to -3kHz-1MHz

MODEL	SYSTEM VOLTAGE	SYSTEM CONFIGURATION	PROTECT MODE	MCOV	SVR	VPR
452S-120-054	120V	2 Wire + G	L-N	150	500	700
			N-G	150	500	700
			L-G	300	600	1200
452S-120S-054	120/240V	3 Wire + G	L-N	150	500	700
			N-G	150	500	700
			L-G	300	600	1200
452S-220-054	220V	2 Wire + G	L-N	320	800	1000
			N-G	320	800	1000
			L-G	640	1300	1800
452S-220S-054	220/380	3 Wire + G	L-N	320	800	100
			N-G	320	800	1000
			L-G	640	1300	1800
452S-277-054	277V	2 Wire + G	L-N	320	800	100
			N-G	320	800	1000
			L-G	640	1300	1800
452S-277S-054	277/480	3 Wire + G	L-N	320	800	100
			N-G	320	800	1000
			L-G	640	1300	1800

Surge Rating Per Mode 054 = 54kA -F = EMI Filter Enclosure Type = Plastic

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device



- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment.

The ACT 450 LT Series Filter Protector is a cost effective compact design made specifically for commercial and industrial applications like Waste Water, HVAC, Refrigeration, Solar and Wind projects and Industrial Controls.

These UL 4th edition protectors are individually fused for maximum safety with a visual indicator light to show if the product is properly working.

## ▶ FEATURES AND BENEFITS

- Filter located on all modes of operation
- 7 modes of discrete protection (L-G, L-N and N-G)
- 10 modes of protection (L-N, L-G, N-G, L-L)
- Green status indicating light
- Individually fused MOV technology
- 1-year standard warranty
- Can be wired SERIES, PARALLEL and KELVIN
- 15 and 30 Amp version  
(note: Product must be wired behind 30 Amp breaker or less to meet UL 1449)

## ▶ STANDARDS MET

- Safety – ETL Recognized to UL1449 4th Edition
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code
- Filter Mil Spec Standard 220B

## ▶ 3RD PARTY TESTED

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device

## TECHNICAL INFORMATION

### ▶ PERFORMANCE SPECIFICATIONS

MODEL NUMBER	MODE	A1 Ring 2kV, 67A	A3 Ring 6kV, 200A	B3/C1 6kV, 3kA
<b>450-LT15-024-030</b>	L-N	58	87	176
5 - 30 VCD/VAC	L-G	48	84	167
15 Amp 30kA	N-G	48	84	167
<b>450-LT15-048-030</b>	L-N	58	123	201
5 - 50 VCD/VAC	L-G	53	111	196
15 Amp 30kA	N-G	53	111	196
<b>450-LT15-120-030</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
15 Amp 30kA	N-G	55	131	433
<b>450-LT15-240-030</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
15 Amp 30kA	N-G	63	257	721
<b>450-LT30-120-050</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
30 Amp 50kA	N-G	55	131	433
<b>450-LT30-240-050</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
30 Amp 50kA	N-G	63	257	721

### EMI/RFI Filter Attenuation - Mil Standard 220B

FREQUENCY	ATTENUATION IN dB
1 kHz	1.3
10 kHz	11
100 kHz	31
500 kHz	30
1 MHz	31
10 MHz	15
20 MHz	8

### ▶ MECHANICAL SPECIFICATIONS


Dimensions	See Drawing
Weight	Approx. 1.0 lbs
Enclosure	ABS Plastic UL94
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%

### ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Series, Parallel and Kelvin
Protection Modes (7 Modes)	L-N, L-G, L-L, N-G
Wired	#22AWG - #14AWG
Status Indicators	Green LED
Filter - Mil Std 220B	30dB @ 500kHz
100 kAIC short circuit current rating with a 15 amp max class T fuse	
15 and 30 Amp versions	

### ▶ DIMENSIONS

15 Amp	3.94"H x 1.4"W x 2.28"D
30 Amp	3.94"H x 2.80"W x 2.28"D

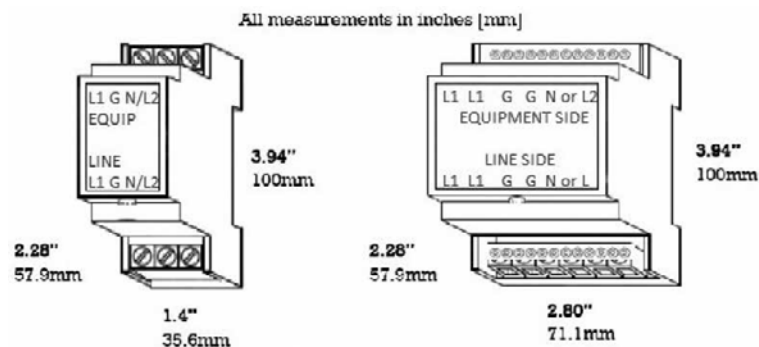


# ACT 450 DS Family

## A DIN Mounted Surge Protection Device



- ▶ The ACT 450 DS Din Mounted Surge Protection Device is designed in a multi-polar configuration to protect single phase, split phase, three phases or 3 phase + neutral AC power.

### ▶ DIMENSIONS & DIAGRAM

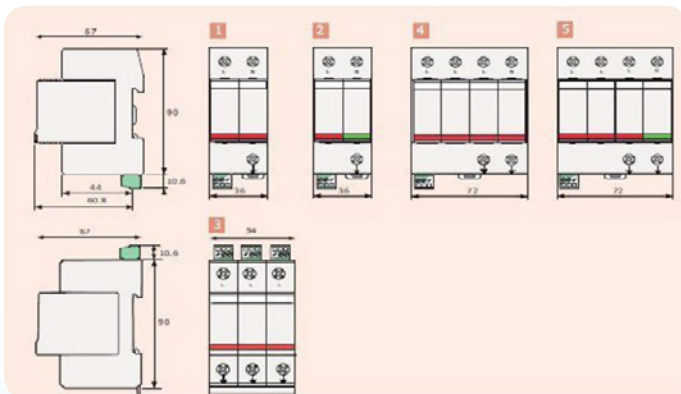

### ▶ FEATURES AND BENEFITS

- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status indicating Lights per phase
- NO/NC Form C Dry Contact standard for remote monitoring
- Individually Fused MOV Technology in a multi-stage protection package
- 1 –Year Standard Warranty


### ▶ STANDARDS MET

- Safety – recognized to UL 1449 4th Edition Type 2 & Type 3
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

### ▶ 3RD PARTY TESTED

### ▶ RECOMMENDED LOCATION


- Motors, Well Pumps / Cat C / Type 2
- Distribution Equipment / Cat B / Type 2
- Branch & Industrial Panels / Cat B / Type 2
- Point of Use / Cat A / Type 3

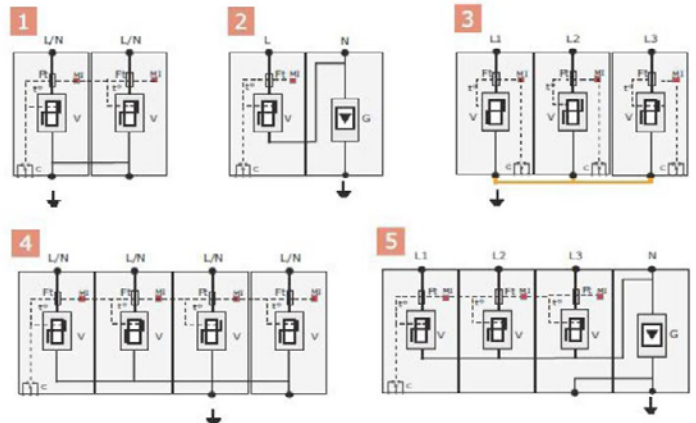

Part Number	Voltage	# of Protector Modules	I <sub>peak</sub> 8/20 us (I <sub>max</sub> /mode)	Clamp Voltage (500 A 8/20us)	Clamp Voltage (10,000 A 8/20us)	# of surges for I <sub>n</sub> /mode @ 20kA, 8/20us	Diagram
ACT 450-DS44-277/G	277/480 L-N, N-G	4	40kA	800V	1000V	15	5
ACT 450-DS44-120/G	120/208 L-N, N-G	4	40kA	400V	500V	15	5
ACT 450-DS43-277	277/480 L-G only	3	40kA	800V	1000V	15	3
ACT 450-DS43-120	120/208 L-G only	3	40kA	400V	500V	15	3
ACT 450-DS43-120	120/240 L-G + N-G	3	40kA	400V	500V	15	3
ACT 450-DS43-480	480 Delta L-G only	3	40kA	1000V	1800V	15	3
ACT 450-DS42-120/G	120 L-N + N-G	2	40kA	400V	500V	15	2
ACT 450-DS42-120	120/240 L-G only	2	40kA	400V	500V	15	1
ACT 450-DS41-240	240 L-G only	1	40kA	800V	1000V	15	1/2 of 1
ACT 450-DS41-220	220 L-G only	1	40kA	700V	900V	15	1/2 of 1
ACT 450-DS41-120	120 L-G only	1	40kA	400V	500V	15	1/2 of 1

\*Other Voltages are available for quote

# ACT LPA Light Pole Arrestor

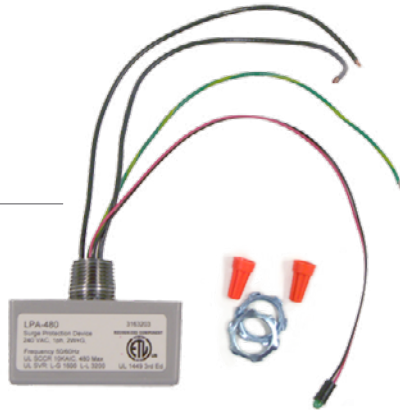


**LPA-480-036-RL**

## ▶ INSTALLATION INSTRUCTIONS

1. Remove electrical cover plate screw
2. Pull wires out of Light Pole and identify the following wires: Phase 1, Phase 2, Ground wires
3. Remove twist cap on first phase wire,
4. Connect L1 wire from LPA to Phase 1 wire.
5. Remove twist cap on second phase wire
6. Connect L2 wire from LPA to phase 2 wire
7. Remove twist cap on Ground wire
8. Connect Green Ground wire to Pole Ground wire
9. If mounting remote LED light into light pole
  - A. Cut LED Red & Black wire
  - B. Drill 1/4" hole in light pole electrical cover
  - C. Insert LED leads through hole and pull tight until LED snaps in place
  - D. Reconnect Red & Black wire using twist caps provided

## ▶ TYPICAL INSTALLATION

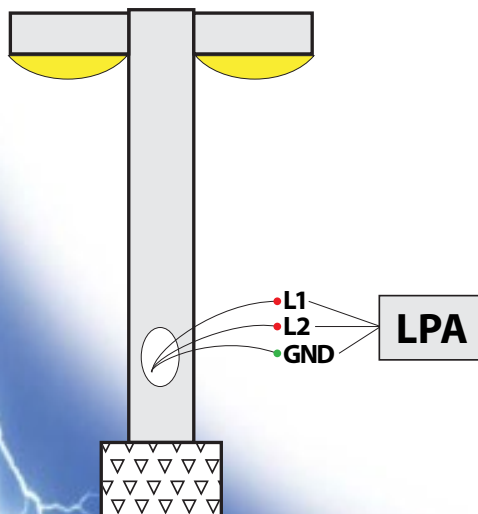

## ▶ FEATURES AND BENEFITS

- Provides 30kA amps single-pulse surge current Line to Neutral or Line to Ground
- Discrete protection on both Line to Ground and Line to Line
- Protects facilities parking lot lighting against lightning transients
- Protects Point of Equipment like well pumps, motors and computer equipment
- Includes pre-wired pigtails to facilitate quick installations
- Fail Safe Open – Meets UL 1449 4th Edition March 2016
- Indicator Light can be installed remotely
- Remote Relay Option (both NC & NO contacts)
- 1 Year Warranty

## ▶ MECHANICAL SPECIFICATIONS

Dimensions	3" x 2" x 2"
Weight	15 oz
Enclosure - NEMA 4X	Plastic UL-94VO
Operating Temp	-40C to +60C
Non-condensing Humidity	5% to 95%

## ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Protection Modes	L-L, L-G
Pre-wired	18" stranded #14 AWG
Status Indicators	Local & Remote LED option
Dry Contacts	Form C NC & NO

Specifications are subject to change without notice

## ▶ STANDARDS MET

- Safety – ETL recognized to UL1449 4th Edition March 2016
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

MODEL NUMBER	SYSTEM VOLTAGE	SYSTEM CONFIGURATION	PROTECT MODE	MCOV	SVR
LPA-240-036	240V	2 Wire +G	L-L	300	800
			L-G	300	800
LPA-480-036	480V	2 Wire +G	L-L	640	1800
			L-G	640	1800

### Options:

- CN 1/2" Chase Mounting Nipple
- RL Remote Status LED
- RR Remote Relay Board with both NC & NO dry contacts

All tests were performed with 6" lead lengths, positive polarity.  
All voltages measured from the zero reference point.



# ACT LPA CN Lighting Panel Arrestor

LPA-120-036-CN



▶ Power Quality is an important consideration with so much of the electrical load being electronic equipment. The ACT Lighting Panel Arrestor is the result of 30 years of protection experience tied into one of the smallest packages on the market.

The LPA small size makes it a perfect product for those common locations where larger surge protection cannot be used and easily installs on any standard Lighting Panel through a “knock-out” and any free breaker sized from 20 -40 Amps. While small in size, it still has industrial strength protection with surge levels up to 36,000 surge amps (8x20us).

## ▶ FEATURES AND BENEFITS

- Provides 36kA amps single-pulse surge current Line to Neutral or Line to Ground
- Discrete protection on both Line to Ground and Line to Line
- Protects facilities lighting panels against lightning and transients
- Protects Point of Equipment like well pumps, motors and computer equipment
- Includes pre-wired pigtails to facilitate quick installations
- Fail Safe OPEN – Listed to UL 1449 4th edition March 2016
- 1 Year Warranty

## ▶ MECHANICAL SPECIFICATIONS

Dimensions	LPA-120 2" x 2" x 1.5" LPA-120S 3" x 2" x 1.5"
Weight	8 oz & 10 oz
Enclosure – NEMA 4X	Plastic UL-94VO
Operating Temp	-40C to +60C
Non-condensing Humidity	5% to 95%

## ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Protection Modes	L-G or L-N and L-L
Pre-wired	18" stranded #14 AWG
Surge Rating (8x20 NS)	36kA/mode

Specifications are subject to change without notice


## ▶ STANDARDS MET

- Safety – ETL recognized to UL 1449 4th edition March 2016
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

## ▶ RECOMMENDED LOCATIONS

- All commercial and residential lighting panels
- Point of Use or Category A locations
- HVAC and Motor Controllers
- Well Pumps

## ▶ TYPICAL INSTALLATION

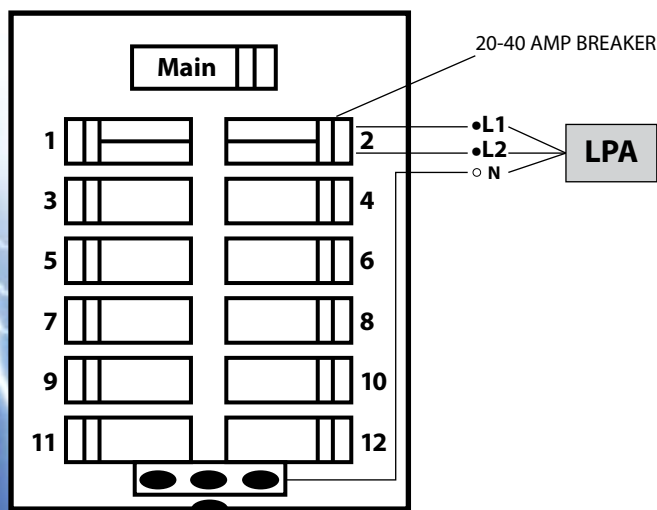

MODEL NUMBER	SYSTEM VOLTAGE	SYSTEM CONFIGURATION	PROTECT MODE	MCOV	VPR 3000A
LPA-120-036-CN	120V	2 Wire	—	—	—
			L-G or L-N	150	700
LPA-120S-036-CN	120/240V	3 Wire	L-L	300	1000
			L-G or L-N	150	700

Standard – CN ½" Chase Mounting Nipple



# DIN RAIL SURGE PROTECTION

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device



- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment.

The ACT 450 LT Series Filter Protector is a cost effective compact design made specifically for commercial and industrial applications like Waste Water, HVAC, Refrigeration, Solar and Wind projects and Industrial Controls.

These UL 4th edition protectors are individually fused for maximum safety with a visual indicator light to show if the product is properly working.

## ▶ FEATURES AND BENEFITS

- Filter located on all modes of operation
- 7 modes of discrete protection (L-G, L-N and N-G)
- 10 modes of protection (L-N, L-G, N-G, L-L)
- Green status indicating light
- Individually fused MOV technology
- 1-year standard warranty
- Can be wired SERIES, PARALLEL and KELVIN
- 15 and 30 Amp version  
(note: Product must be wired behind 30 Amp breaker or less to meet UL 1449)

## ▶ STANDARDS MET

- Safety – ETL Recognized to UL1449 4th Edition
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code
- Filter Mil Spec Standard 220B

## ▶ 3RD PARTY TESTED

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device

## TECHNICAL INFORMATION

### ▶ PERFORMANCE SPECIFICATIONS

MODEL NUMBER	MODE	A1 Ring 2kV, 67A	A3 Ring 6kV, 200A	B3/C1 6kV, 3kA
<b>450-LT15-024-030</b>	L-N	58	87	176
5 - 30 VCD/VAC	L-G	48	84	167
15 Amp 30kA	N-G	48	84	167
<b>450-LT15-048-030</b>	L-N	58	123	201
5 - 50 VCD/VAC	L-G	53	111	196
15 Amp 30kA	N-G	53	111	196
<b>450-LT15-120-030</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
15 Amp 30kA	N-G	55	131	433
<b>450-LT15-240-030</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
15 Amp 30kA	N-G	63	257	721
<b>450-LT30-120-050</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
30 Amp 50kA	N-G	55	131	433
<b>450-LT30-240-050</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
30 Amp 50kA	N-G	63	257	721

### EMI/RFI Filter Attenuation - Mil Standard 220B

FREQUENCY	ATTENUATION IN dB
1 kHz	1.3
10 kHz	11
100 kHz	31
500 kHz	30
1 MHz	31
10 MHz	15
20 MHz	8

### ▶ MECHANICAL SPECIFICATIONS


Dimensions	See Drawing
Weight	Approx. 1.0 lbs
Enclosure	ABS Plastic UL94
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%

### ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Series, Parallel and Kelvin
Protection Modes (7 Modes)	L-N, L-G, L-L, N-G
Wired	#22AWG - #14AWG
Status Indicators	Green LED
Filter - Mil Std 220B	30dB @ 500kHz
100 kAIC short circuit current rating with a 15 amp max class T fuse	
15 and 30 Amp versions	

### ▶ DIMENSIONS

15 Amp	3.94"H x 1.4"W x 2.28"D
30 Amp	3.94"H x 2.80"W x 2.28"D

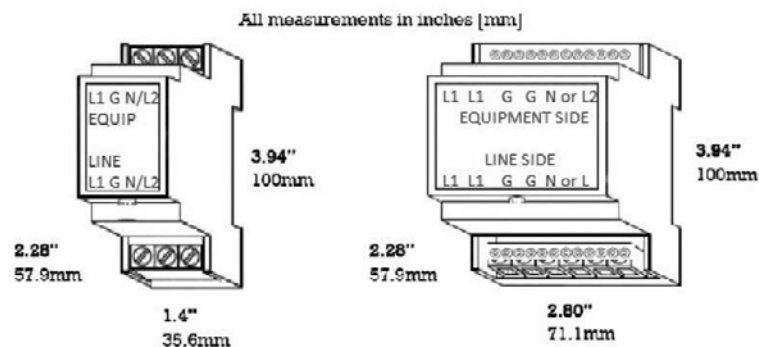


# ACT 450 DS Family

## A DIN Mounted Surge Protection Device



- ▶ The ACT 450 DS Din Mounted Surge Protection Device is designed in a multi-polar configuration to protect single phase, split phase, three phases or 3 phase + neutral AC power.

### ▶ DIMENSIONS & DIAGRAM

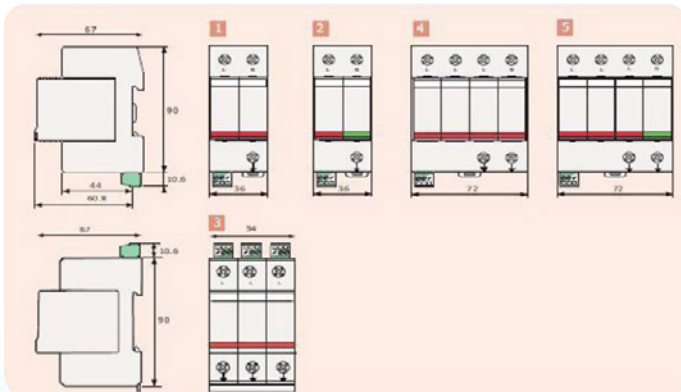

### ▶ FEATURES AND BENEFITS

- 4 Modes of Discrete Protection (L-N, N-G)
- 10 Modes of Protection (L-N, L-G, N-G, L-L)
- Green Status indicating Lights per phase
- NO/NC Form C Dry Contact standard for remote monitoring
- Individually Fused MOV Technology in a multi-stage protection package
- 1 –Year Standard Warranty


### ▶ STANDARDS MET

- Safety – recognized to UL 1449 4th Edition Type 2 & Type 3
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code

### ▶ 3RD PARTY TESTED

### ▶ RECOMMENDED LOCATION

- Motors, Well Pumps / Cat C / Type 2
- Distribution Equipment / Cat B / Type 2
- Branch & Industrial Panels / Cat B / Type 2
- Point of Use / Cat A / Type 3

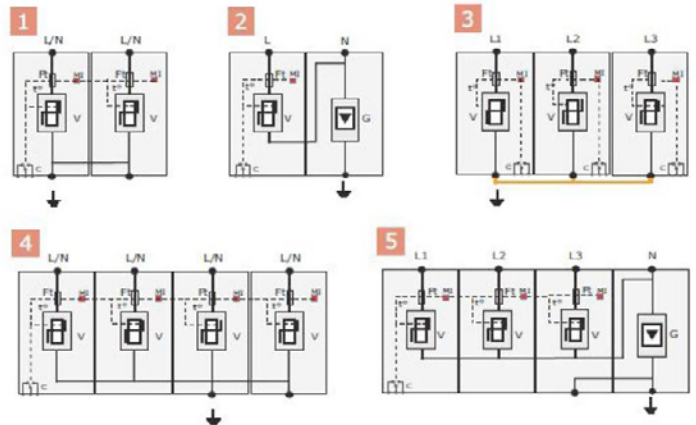

Part Number	Voltage	# of Protector Modules	I <sub>peak</sub> 8/20 us (I <sub>max</sub> /mode)	Clamp Voltage (500 A 8/20us)	Clamp Voltage (10,000 A 8/20us)	# of surges for I <sub>n</sub> /mode @ 20kA, 8/20us	Diagram
ACT 450-DS44-277/G	277/480 L-N, N-G	4	40kA	800V	1000V	15	5
ACT 450-DS44-120/G	120/208 L-N, N-G	4	40kA	400V	500V	15	5
ACT 450-DS43-277	277/480 L-G only	3	40kA	800V	1000V	15	3
ACT 450-DS43-120	120/208 L-G only	3	40kA	400V	500V	15	3
ACT 450-DS43-120	120/240 L-G + N-G	3	40kA	400V	500V	15	3
ACT 450-DS43-480	480 Delta L-G only	3	40kA	1000V	1800V	15	3
ACT 450-DS42-120/G	120 L-N + N-G	2	40kA	400V	500V	15	2
ACT 450-DS42-120	120/240 L-G only	2	40kA	400V	500V	15	1
ACT 450-DS41-240	240 L-G only	1	40kA	800V	1000V	15	1/2 of 1
ACT 450-DS41-220	220 L-G only	1	40kA	700V	900V	15	1/2 of 1
ACT 450-DS41-120	120 L-G only	1	40kA	400V	500V	15	1/2 of 1

\*Other Voltages are available for quote



# ACT 450 DS2XX Family

## Din Rail DC Power Surge Protector



▶ The ACT 450 DS2X0-XX DC Series Protectors is designed to protect equipment connected to DC power supply (or AC) against lightning surges.

These devices are based on high energy varistors (MOV) matched with the DC operating voltage (from 12 to 130 Vdc). The MOV are equipped with internal thermal disconnections in order to provide the safest end of life. The indication of the disconnection status is provided by a mechanical indicator and could be transmitted through a remote signal mechanism (option "S"). The pluggable module allows an easy and fast maintenance.


### ▶ FEATURES AND BENEFITS

- From 12 to 130Vdc
- Very low Up protection Level
- Compact design
- I<sub>max</sub> extremely strong: 20 to 40kA
- IEC 61643-1, EN61643-11, UL 1449 4th Edition Type 3
- 1 Year Standard Warranty

### ▶ CHARACTERISTICS

PART NUMBER		DS22012DC	DS220-24DC	DS23048DC	DS24075DC	DS24095DC	DS240110DC	DS240130DC
Nominal DC voltage	U <sub>n</sub>	12 Vdc	24 Vdc	48 Vdc	75 Vdc	95 Vdc	110 Vdc	130 Vdc
Maximum operating voltage	U <sub>c</sub>	24 Vdc	38 Vdc	65 Vdc	100 Vdc	125 Vdc	150 Vdc	180 Vdc
Nominal discharge current	I <sub>n</sub>	10kA	10 kA	15 kA	20 kA	20kA	20 kA	20 kA
Maximal discharge current	I <sub>max</sub>	20 kA	20 kA	30 kA	40 kA	40 kA	40 kA	40 kA
Protection Level @ Up	U <sub>p</sub>	250 V	250 V	300 V	390 V	450 V	500 V	520 V
Protection Level @ 3kA		195 V	195 V	230 V	280 V	310 V	370 V	510 V
Thermal disconnecter		internal	internal	internal	internal	internal	internal	internal
Protective fuses (if necessary)		20A gG	20A gG	20A gG	50A gG	50 gG	50 gG	50 gG
Dimensions		see drawing						
Wiring to network		by screw terminal - cross section 1,5-10mm <sup>2</sup> (active wire) and 2,5-25mm <sup>2</sup> (earthing wire)						
Disconnection indicator		2 mechanical indicators						
Replacement module		pluggable module DSM2x0-xxDC						
Remote signalling		option (DSM2X0-XXDC) - by changeover contact						
Mounting		on symmetrical rail						
Operative temperature		-40/+85°C						
Protection index		IP 20						
Housing material		thermoplastic UL94-V0						


### ▶ SPECIFICATIONS

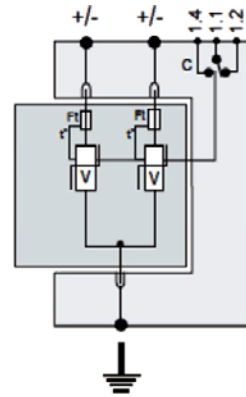

C: Remote signalling contact  
V: Varistor  
Ft: Thermal fuse  
t°: Thermal disconnection system

#### ACT 450-DS2X0 S-XXDC

— DC operating range  
— Remote signal option  
— Maximal discharge current

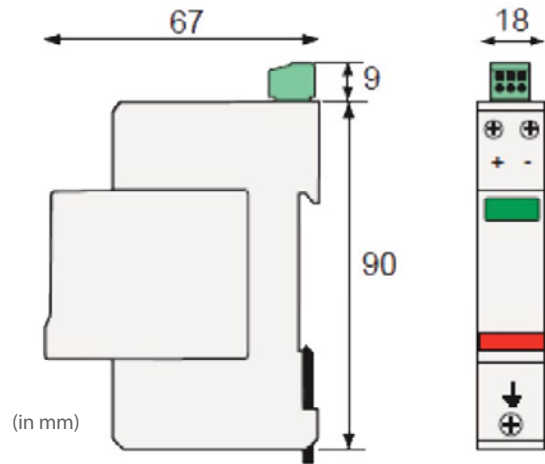

# ACT 422 DLU Family

A DIN Mounted Data / Telephone Protection Device



- ▶ The ACT 422 DLU and DLU2 family of Din rail mounted surge protectors are resettable and are designed to protect your sensitive datacom, telephone, and instrumentation equipment against harmful lightning surges and electrical transients.

These surge protectors must be installed on a symmetrical DIN rail and are available for transmission lines ranging from 6 - 170Vdc and can handle transmission speeds up to 10 Mbps.

These surge protectors utilize a hybrid technology consisting of Gas Tube and fast clamping diodes that combine an ultra-fast response time (<1 ns) and a higher power handling capability of 20 kA.

The DLU protects 1 pair (2 wires) and the DLU2 protects 2 pairs (4wires). These surge protectors protect the shield to ground via gas tube and offer direct earth grounding via the din rail clip.

## ▶ RECOMMENDED LOCATION

- Commercial & Industrial

## ▶ FEATURES AND BENEFITS

- DIN Rail Mounting
- All types of Telephone and Data Lines
- Monoblock Housing
- Single and Dual pair versions
- Transmission and protection of shield wire (DLU)
- 1 Year Standard Warranty


## ▶ STANDARDS MET

- Safety – UL Listed
- IEC 61643-21 Compliant
- ANSI/IEEE C62.41, C62.45

# ACT 422 DLU / DLU2 DIN Mounted Family


## 2-pair version: DLU2

Part Number	DLU2-170	DLU2-48D3	DLU2-24D3	DLU2-12D3	DLU2-06D3	DLU2-06DBC
Typical Application	Telephone line ADSL	48 V line	4-20 mA 24 V line	RS232	RS422	T2 - T1 10BaseT
Configuration	2 pairs	2 pairs	2 pairs	4 wires	2 pairs	2 pairs
Nominal line voltage (Un)	150 V	48 V	24 V	12 V	6 V	6 V
Max. line voltage (Uc)	170 V	53 V	28 V	15 V	10 V	10 V
Max. line current	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA
Protection level (Up) 8/20 $\mu$ s impulse - 5kA	220 V	70 V	70 V	30 V	20 V	25 V
Nominal discharge current (In) 8/20 $\mu$ s impulse - 10 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Max. discharge current (Imax) 8/20 $\mu$ s impulse - 1 time	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Impulse current (Iimp) 10/350 $\mu$ s impulse - 2 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Type of diagram	D	C	C	C	C	C
End of life	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit
Mechanical characteristics	Monobloc Symmetrical DIN rail mounting Dimensions: See drawing Screw terminal connection - min/max: 22/16 AWG Housing material: Thermoplastic UL 94-V0 Ground connection via DIN rail (DLU, DLU2) and screw terminal (DLU).					

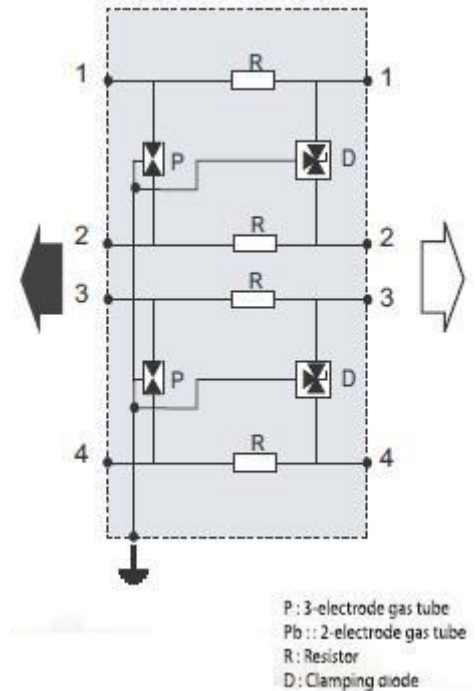

## 1-pair version: DLU

Part Number	DLU-170	DLU-48D3	DLU-48DBC	DLU-24D3	DLU-12D3	DLU-12DBC	DLU-06D3	DLU-06DBC
Typical Application	Telephone line ADSL	48 V line	Fipway WorldFIP Fieldbus-H2	4-20 mA 24 V line	Profibus-FMS interbus Fieldbus-H1 Batibus	Profibus-DP LONwork	RS485	6 V line high bitrate
Configuration	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield
Nominal line voltage (Un)	150 V	48 V	48 V	24 V	12 V	12 V	6 V	6 V
Max. line voltage (Uc)	170 V	53 V	53 V	28 V	15 V	15 V	10 V	10 V
Max. line current	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA
Protection level (Up) 8/20 $\mu$ s impulse - 5kA	220 V	70 V	75 V	40 V	30 V	35 V	20 V	25 V
Nominal discharge current (In) 8/20 $\mu$ s impulse - 10 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Max. discharge current (Imax) 8/20 $\mu$ s impulse - 1 time	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Impulse current (Iimp) 10/350 $\mu$ s impulse - 2 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Type of diagram	D	D	D	D	D	D	C	C
End of life	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit
Mechanical characteristics	Monobloc Symmetrical DIN rail mounting Dimensions: See drawing Screw terminal connection - min/max: 22/16 AWG Housing material: Thermoplastic UL 94-V0 Ground connection via DIN rail (DLU, DLU2) and screw terminal (DLU).							

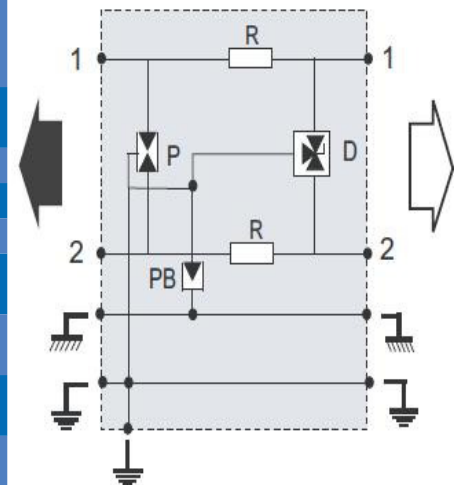

# ACT 422-XXX-200 Series Protector

Telephone, Data, Control Line and Alarm Protectors



201

202

203

▶ With the increases in the sensitivity of commercial and residential electronic equipment, the ACT 422 200 Series DIN rail protector is perfect for preventing lightning and noise transient surges from entering into your building through the telephone or alarm cables damaging your sensitive IT equipment like computers, industrial controls, faxes and telephone equipment.

The ACT 422 200 Series is a series connected protector with screw terminals on both Line and Equipment side of the protector. is designed with a hybrid multi-stage design that the first stage gas tube robustly protects against heavy lightning surges, while the second stage Diodes insures that only a minimal let-through voltage is passed on to your electronic equipment.

The ACT 422 is an "All Mode" telecom / datacom protector that protects all lines modes of the connector for Tip to Ground, Ring to Ground and Tip to Ring.

## ▶ RECOMMENDED LOCATION

- Residential & Commercial Telephone
- Alarm Lines
- Datacom and Control Lines

## ▶ FEATURES AND BENEFITS

- Robust Design – 10kA (8x20uSec)
- Uses dual Hybrid Protection design
- Transient Silicon Diode Technology
- Fast Response Time < 1 nSec
- Extremely low let through voltages
- Absorbs and Dissipates surges within the unit
- All Mode Protection (T-R, T-G, R-G)
- 1 Year Standard Warranty

## ▶ STANDARDS MET

- UL 497A — ANSI/ IEEE C62
- 3rd Party Tested

## ▶ TECHNICAL INFORMATION

- ACT 422-XXX-201** Single pair protector with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-202** Dual pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-203** Three pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-204** Four pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-206** Six pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**

Where XXX = 005, 024, 048, 110, 180 Volts DC

# ACT 422-XXX-200 Series Protector


## MECHANICAL SPECIFICATIONS

Dimensions: 90 mm x 18 mm x 62 mm  
 Weight: 150g

## ELECTRICAL SPECIFICATIONS

Max Current (8x20us) 10kA  
 Transfer Speed 10 Mbps  
 dB Loss <0.5  
 Connector Type Screw Terminals

Operating Voltage	Nominal Breakdown	Clamp Voltage (8x20 us 3,000 amps)
05V	<15V	70V
24V	<40V	90V
48V	<150	300V
110	<300V	350V
180V	<300V	350V

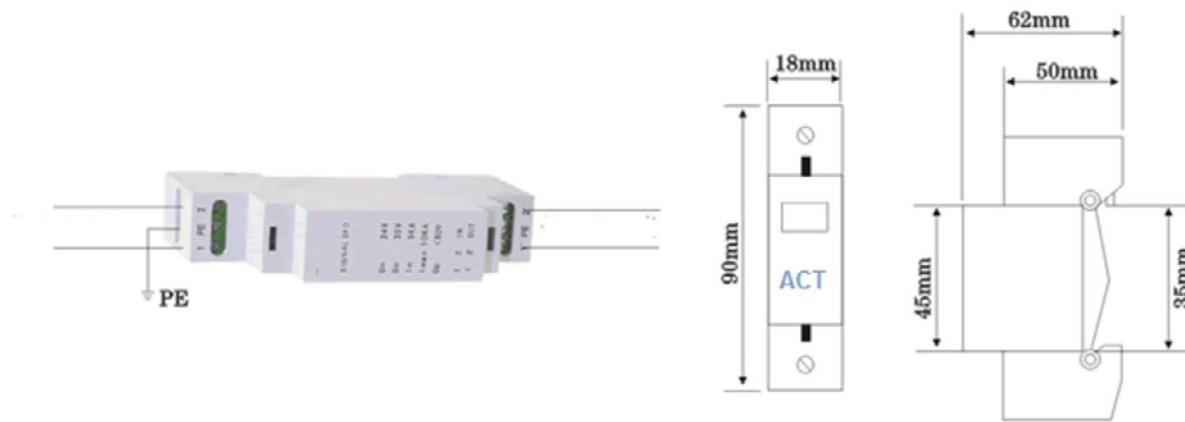





# A/C FILTER DESIGNS

# ACT 320 Power Factor Filter

A Wall and Floor Mounted Energy Savings Device



- ▶ The ACT Power Factor Filter is designed to increase a lagging Power Factor on a motor back towards unity reducing the natural inefficiencies in supplying power to the motors. Reducing inefficiencies in power delivery lowers wasted energy across the electrical wires, improves motor performance and ultimately lowers electrical bills associated with your motors to up to 8%.

Correcting Power Factor towards unity will free up current normally tied to your existing motors. This means that without having to upgrade your facility power, you can now power other loads like new additional motors, lights and computers.

One of the first indicators of excessive currents in a facility may be failure of fuses and false tripping breakers. Many times over current is experienced because excessive voltages or harmonic voltages are present. The ACT PF filter in conjunction with other fine ACT Power Quality products can reduce harmonic voltages and power pollution that caused facility power problems and damages to the electrical loads.

For locations where the power company charges extra penalties for poor power factor, by correcting the power factor, The ACT PF Filter will reduce these extra penalties potentially saving thousands of dollars per year for these industrial locations.

## ▶ RECOMMENDED LOCATION

- Waste Water Treatment Facilities
- Hospitals and Health clinics
- Industrial Facilities
- Any standard Motors from ½ to 400 HP
- Facilities being penalized by Power Companies

## ▶ FEATURES AND BENEFITS

- Conserve Energy – Can be part of your **“Green Initiative”**
- Increases motor and electrical product life
- Better Utilization of Power – Releases System Capacity
- Reduces Utility Charges
- Improves and Stabilizes facility Voltage
- Reduces Power Losses
- Pays for Itself - Quick Return on Investment models
- Surge Protection protects motors and PF filter (Optional)
- Filter Fused to 100kAIC (Optional)
- Contactor disconnect/ connect circuit (Optional)
- Status Indicator (Green LED), each phase alarm (Red LED)
- Form C Remote Alarm NC & NO (Optional)
- 2 Year Warranty

## ▶ STANDARDS MET

- Safety – UL Listed
- ANSI/IEEE 141 – 1986
- ANSI / IEEE Std 519- 1992
- ANSI/NFPA 70 National Electrical Code

## ▶ 3RD PARTY TESTED

**FOR MORE TECHNICAL INFORMATION PLEASE REQUEST  
THE  
ACT 320 POWER FACTOR APPLICATION DOCUMENT**

# ACT 320 Power Factor Filter



## TECHNICAL INFORMATION

### MECHANICAL SPECIFICATIONS

Enclosure Painted Steel NEMA 12  
Figure 00 to 6

See ACT 320 Application Guide

Weight 11 to 360 lbs

See ACT 320 Application Guide

Operating Temp -20 to +120F

Non-Condensing Humidity 5% to 95%

### ELECTRICAL SPECIFICATIONS

Connection Method Parallel

KVAR .05 - 400

Fusing 100 kAIC

Breaker (Option) 65 kAIC

Contractors (Optional) Removes capacitors from circuit when not needed

Status Indicator Green LED

Blown Fuse Alarm Red LED

Remote Relay Alarm Form C Contact (NC & NO)  
- 240 VAC 6 amps

Surge Protection Device (Optional) See ACT 452  
Specification Sheet

### PART NUMBER

ACT 320- VVVV- WWW- XXX- YY- S-		
VVVV-	<b>Voltage</b> 120S 120Y 277Y 240D 480D	120/240V 120/208V 277/480V 240V Delta 480 Delta
WWW-	<b>KVAR Size</b> 000.5 to 400.0	
XXX-	<b>Fuse/Breaker</b> FSE BKR	Fuse Breaker
YY-	<b>Contactor</b> CN	Contactor
S-	<b>ACT 452 Surge Protector</b> with surge protector	

FOR MORE TECHNICAL INFORMATION PLEASE REQUEST THE  
**ACT 320 POWER FACTOR APPLICATION DOCUMENT**

**EXAMPLE:** ACT320  
480D 010.0 FSE CN S

# ACT 350 Line Reactor Filters



▶ ACT 350-RL Harmonic Compensated Line/Load Reactor Filters are part of a full facility solution that focus is cleaning up the harmonic and high frequency noise generated by your invertors, variable frequency drives (VFD), UPS's and other electronic equipment. These filters are normally installed in Hospitals near elevators, HVAC and X-Ray rooms; At industrial facilities where motors are used on the production lines and Waste Water Treatment Facilities where multiple pumps are needed to move the water.

### 1 Year Standard Warranty

**For more technical information, including mechanical drawings, please see ACT350 Application Document.**

## ▶ PRODUCT SPECIFICATIONS

<b>Standard impedance values</b>	1-1/2%, 2, 3%, 4%, 5% available
<b>Impedance basis</b>	Reactor fundamental current rating
<b>Service Factor</b> ( <i>Continuous</i> )	
Reactors rated 1 to 750 Amps	150% of fundamental rating
Reactors rated above 750 Amps	125% of fundamental rating minimum
<i>Note: Select reactor based on fundamental current rating</i>	
<b>Overload Rating</b>	200% of fundamental for 30 minutes 300% of fundamental for 1 minute
<b>Maximum system voltage</b>	600 Volts (units with terminal blocks) 690 Volts (units with box lugs or tab terminals)
<b>Maximum switching frequency</b>	20 KHz
<b>Insulation system</b>	Class N (200° C)
<b>Temperature rise</b>	
Open or enclosed reactors	135° C (average)
<b>Ambient temperature</b>	
Open or enclosed reactors	45° C (maximum)
<b>Altitude (maximum)</b>	1000 meters
<b>Fundamental frequency</b>	
Line or Load	50/60 Hz
<b>Approvals:</b>	CE, UL-508, CSA C22.2
<b>Inductance curve</b> (typical)	100% at 100% current 100% at 150% current 50% at 350% current (minimum)
<b>Inductance tolerance</b>	+/- 10%
<b>Impregnation:</b>	High Bond Strength "Solvent-less" Epoxy, 200° C UL94HB recognized
<b>Dielectric Strength</b>	3000 volts rms (4243 volts peak)
<b>dv/dt Protection</b>	Meets NEMA MG-1, part 31 (same as inverter duty motors)
<b>Protection:</b>	
meet IP20	Open reactors with terminal blocks through 45 amps

# ACT 350 Line Reactor Filters




▶ ACT 350-RL Harmonic Compensated Line/Load Reactor Filter are part of a full facility solution that focus is cleaning up the harmonic and high frequency noise generated by your inverters, variable frequency drives (VFD), UPS's and other electronic equipment. These filters are normally installed in Hospitals near elevators, HVAC and X-Ray rooms; At industrial facilities where motors are used on the production lines and Waste Water Treatment Facilities where multiple pumps are needed to move the water.

These robust filters are designed with a MTE RL reactor component as its backbone, the complete ACT filter system provides a power quality solution for any six pulse rectifiers or power conversion units (like used by computer servers). Unlike the competition there is no need to derate the ACT reactors as they are harmonic compensated and IGBT protected to assure optimum performance, and are used specifically to reduce harmful harmonics produced by inverters and VFD drives. ACT are conservatively designed to have higher continuous and overload ratings that offers Reactor / Filters up to 690 VAC with compatible impedance ratings.


## TECHNICAL INFORMATION

Percent Harmonics vs Total Line Impedance								
Total Input Impedance								
Harmonic	3%	4%	5%	6%	7%	8%	9%	10%
5th	40	34	32	30	28	26	24	23
7th	16	13	12	11	10	9	8.3	7.5
11th	7.3	6.3	5.8	5.2	5	4.3	4.2	4
13th	4.9	4.2	3.9	3.6	3.3	3.15	3	2.8
17th	3	2.4	2.2	2.1	0.9	0.7	0.5	0.4
19th	2.2	2	0.8	0.7	0.4	0.3	0.25	0.2
%THID	44.13	37.31	34.96	32.65	30.35	28.04	25.92	24.68
TRMS	1.09	1.07	1.06	1.05	1.05	1.04	1.03	1.03

Typical Harmonic Distortion of PWM Inverter Without Reactor

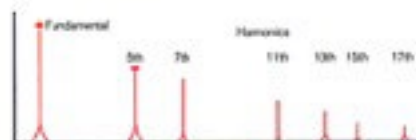

Typical Harmonic Distortion of PWM Inverter With 5% Impedance Reactor

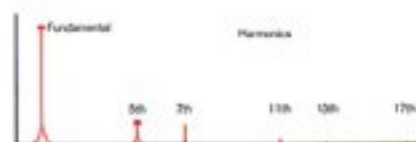


### ▶ HARMONIC PROTECTION


The Reactor Filter provides a multi-level of protection to the facility.

- Protects the motor itself from harmful damage of harmonic frequencies.
- Protects the motor and drive controller from harmful voltage surges coming into the drive
- Protects the rest of the facility from harmful harmonics generated by each Variable Speed Drive

Without Reactor



With 5% Impedance Reactor



# ACT 470 Advanced EMI / Noise Filters



▶ ACT 470 EMI / Noise Filter Family are part of a full facility solution that focus is cleaning up medium and high frequency noise (above 1 kHz) on the power line generated by your electrical and electronic equipment. With the dramatic increase in use of energy saving devices like Variable Speed Drives, Switching Power Supplies and even Electronic Ballast, these sensitive devices not only need clean power to operate properly but create a tremendous amount of power pollution that degrades the life of all electrical devices connected to the facility (See IEEE Ballast White Paper). These filters have shown to reduce a facility electrical maintenance by over 70% (see Wal-Mart White Paper). Normally these power filters are installed inside the ACT 471 and ACT 455 Surge Protection Devices but they are also available as a Wall Mounted Stand Alone Product for locations that have already installed surge protection. The ACT 470 Filters are normally installed in any commercial or industrial application at the front of the building at the Service Entrance and downstream on any lighting panels or any power panel feeding computers.


The ACT 470 Advanced EMI/Noise Filter (Red and Green) using NEMA LS-1 1992, out performs all other competitors for parallel connected filters in its class. Power filtering has shown to reduce all facility electrical maintenance and improve power delivery to the loads (which lowers electricity usage).

Unlike other manufacturers who treat power filtering as a "Check Box" solution and only provide a low energy small polypropylene capacitor, ACT uses large oil filled motor start filter capacitors that not only outperform, but has the strength to filter out even the worst noise environments.

While the Advanced Filter is designed to fit in the ACT 471 and ACT 455 Surge Protection Product family, The Advanced Filter also comes in two mechanical styles, Wall Mount and OEM (which is designed to install inside another manufacturer Enclosure) , both to be used by itself as a self-contained product.

## ▶ FEATURES AND BENEFITS

- **Lower Facility Maintenance Costs** – Filter extends the life of all electrical and electronic products by scrubbing out power pollution from the power line.
- **Cleaner Power Means Lower Electricity Usage** – Filter removes unwanted medium and high frequency noise pollution for electrical wires. This means lower energy loss at transformers and motors.
- **Fast Transient Response** – Filter capacitors react in less than 1 nanosecond to a quick change in voltage (i.e. transient surges)
- **Greater Noise Rejection than other filters** - Greater than -45 dB noise rejection from 3 kHz – 1 MHz
- **Status Good Indicator Light** – Green light tells you if unit is still working within specification
- **2 year Warranty**

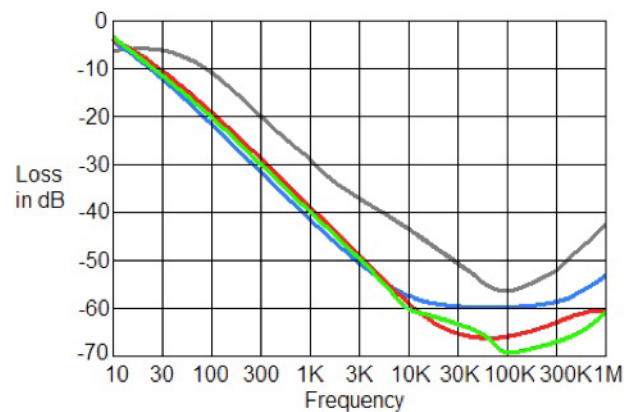

**Red & Green represent ACT 470 performance when compared to other filter manufacturers.**



# ACT 470 Advanced EMI / Noise Filters

PART NUMBER	DESCRIPTION
ACT 470-120-200	120V Single Phase, -50 dB Heavy duty Noise Filter per module, Wall mounted in a NEMA 12 painted steel enclosure
ACT 470-120S-200	120/240 V Split Phase, -50 dB Heavy duty Noise Filter per module, Wall mounted in a NEMA 12 painted steel enclosure
ACT 470-120Y-200	120/208 V Split Phase, -50 dB Heavy duty Noise Filter per module, Wall mounted in a NEMA 12 painted steel enclosure
ACT 470-277Y-200	277/480 V Split Phase, -50 dB Heavy duty Noise Filter per module, Wall mounted in a NEMA 12 painted steel enclosure
ACT 470-480D-200	277/480 V Split Phase, -50 dB Heavy duty Noise Filter per module, Wall mounted in a NEMA 12 painted steel enclosure

## TECHNICAL INFORMATION

### STANDARDS MET


- Safety – designed to meet UL1283
- NEMA LS-1 1992 EMI/Noise Tested
- ANSI /NFPA 70 National Electrical Code
- 3rd Party Performance Tested

### MECHANICAL SPECIFICATIONS

Dimensions	7.5"H x 6.28"W x 4"D
Weight	7.5 lbs
Wall Mounted Enclosure	NEMA 12 Painted Steel
OEM Enclosure	Plastic

### ELECTRICAL SPECIFICATIONS

Connection Method	Parallel
Filter Modes	L-N, L-G, L-L* (* Voltage dependant)
Pre-Wired	24" stranded #10 AWG
Status Indicator	Green LED indicates if filter is good
Breaker (optional)	15 amp resettable breaker

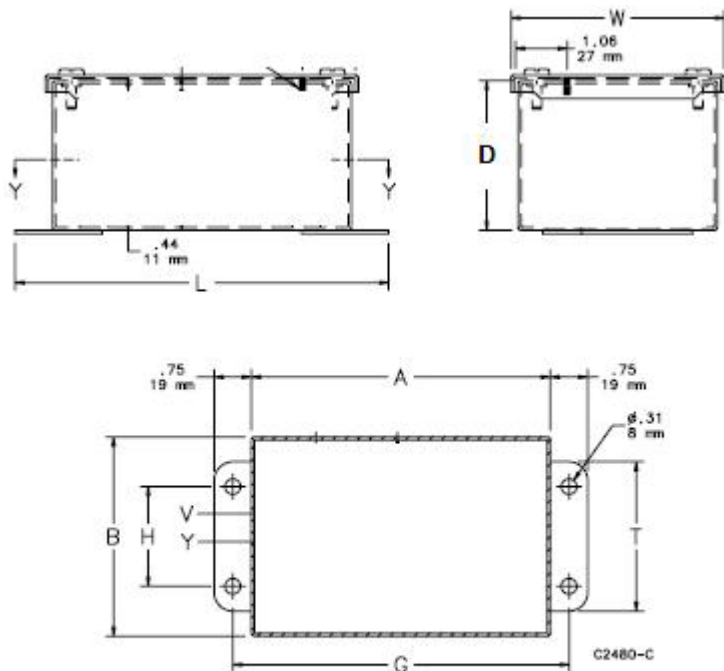

ENCLOSURE DIM L = 7.5" W= 6.28" D = 4"  
MOUNTING G = 6.75" H = 4.0"

# ACT SV200 SaveVar Home Power Quality Filter

A Power Quality Filter & Energy Savings Device



▶ The ACT SV200 Home Power Quality Filter is designed to improve the quality of power being fed to all electronic and electrical components in a home. Like dirty water has to be filtered before being used, your power in your home must be as clean as possible to ensure proper operation of your sensitive electronic devices (TV, Computer, Stereo, etc.) and even your important electrical devices like HVAC, Dryers, Freezers, Pool Pump and Refrigerators. Poor power quality means your products have to work harder (meaning wasted electricity) and have a much shorter life than expected.

The ACT Power Quality Filter saves the consumer money by its unique 3 Element design (Patent Pending) that focuses on multiple issues going on in your power. The first part of the design attacks poor Power Factor, by increasing a lagging power factor on any motor in your home towards unity, will reduce the natural inefficiencies in supplying power to any motors in your house (See SaveVar Application brochure).

Reducing inefficiencies in power delivery to your electrical and electronic devices lowers wasted energy across the electrical wires, motor and transformer, which improves the motor performance and ultimately lowers electrical bills associated with your inductive devices like all motors to up to 8%.

The second element of the SaveVar Filter is an industrial sized surge protector capable of protecting your home even up to a single 80,000 amp lightning strike or can handle tens of thousands of smaller normal transient surges seen daily. Transient surges are known to be the number one power quality event that damages both electrical and electronic components.

The third element of the ACT Power Filter is a world class EMI/Low frequency filter. Low frequency power noise (3 kHz to 1 MHz) is actually being generated inside your own home. All electronic devices power in your home creates power noise pollution that harms other electronic devices in your home. Unlike other manufacturers, the ACT Advanced EMI filter focuses on the cleaning up these lower frequencies from 3 kHz to 1 MHz.

## ▶ RECOMMENDED LOCATION

- "P" versions safely plugs into household driers outlet
- "S" versions provides cable stubs to be hardwired into house or pool power panels

## ▶ FEATURES AND BENEFITS

- Conserve Energy – Can be part of your Home **"Green Initiative"**
- Quick return on investment with 3% to 8% electrical savings and reduced equipment failure
- Better Utilization of Power – Releases Energy Back Into the System to be used elsewhere
- Improves and Stabilizes Home Voltage – stable power Improves life of electrical devices in home, including computer, TV, refrigerator, freezer, and HVAC
- 80,000 Amp Surge Protector has proven to be strong enough to protect even cellular towers for over 25 years
- Filter is Safely Self-Fused
- 90 day Money Back Guarantee
- 1 Year Replacement Warranty

## ▶ STANDARDS MET

- Surge Protector is ETL listed to UL1449 4th edition March 2016
- Filter designed to meet UL1283 Power Filter
- Meets ANSI/NFPA 70 National Electrical Code

## ▶ 3RD PARTY TESTED

- Performance tests conducted by 3rd party testing company

FOR MORE TECHNICAL INFORMATION PLEASE REQUEST THE **ACT 320 POWER FACTOR APPLICATION DOCUMENT**

**THINK GREEN –THINK SAVEVAR  
EASILY CONNECTS TO YOUR DRYER!**

# ACT SV200 SaveVar Home Power Quality Filter

A Power Quality Filter & Energy Savings Device



## 3 OR 4 PRONG DRYER PLUG OPTIONS

### UNIQUE 3-PART DESIGN FOUND IN NO OTHER PRODUCT

- Patent Pending on 3 element protection for home
  - Power Factor Correction
  - EMI / Low Frequency Filter from 3 kHz to 1 Mhz
  - Transient Surge Protection for whole home to 80,000 amps lightning surge per home

## TECHNICAL INFORMATION

### ▶ MECHANICAL SPECIFICATIONS

Enclosure - Metal	8" x 8" x 4"
Weight	10.6 lbs
Operating Temp	0 to +120F
Non-Condensing Humidity	5% to 95%

### ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Parallel via Dryer Plug or with leads to power panel
20 Amp	20 Amp
Surge Protection Device	
Per Phase Max Surge Current	40 kA 8x20 uSec
Per Unit Max Surge Current	80 kA 8x20 uSec
100 kHz Surge Ring Wave	> 5000 surges

### ▶ PART NUMBERS MATRIX

ACT SVR 120S-XXX-YY

XXX =	100 Plastic Enclosure	
	200 Metal Enclosure	
YY =	P3	3 prong dryer plug
	P4	4 prong dryer plug
	S	3 foot cable stub for panel mounting

FOR MORE TECHNICAL INFORMATION PLEASE REQUEST THE **ACT 320 SAVEVAR APPLICATION DOCUMENT**



# DC SURGE PROTECTION

# ACT 421 DC Transient Surge Arrestor



ACT 421-XXX-040-101

▶ The ACT 421 is a transient surge arrester capable of protecting DC voltage between 12 - 350 Volts DC. It has been specifically designed to protect sensitive power supply lines from lightning and other surges induced on the input DC power lines. This Surge Protection Device (SPD) is designed with 2 Line low voltage surge suppressers that take advantage of the latest technology available.

As a quality SPD, the ACT 421 is designed and tested to meet UL 497 safety, but the protector is also designed and tested to meet the stringent ANSI/IEEE B3 Impulse performance standards (Over 900 times the UL497 requirement).

Unlike other low voltage line surge suppressers in both performance and surge withstands capability. These surge protectors were developed specifically to protect low voltage supply lines where + and - set of lines needs maximum surge protection.

The ACT 421-XXX-040-100 is designed for indoor or weather resistant protection. The ACT 421-XXX-040-200 is designed in a waterproof enclosure and can be safely buried.

## ▶ RECOMMENDED LOCATION

- Solar or Wind Generation Systems
- Telecom Battery Systems
- Any application using DC voltages outdoors

## ▶ FEATURES AND BENEFITS

- Robust Design – 40kA (8x20uSec)
- Extremely low let through voltages
- Fast Response Time < 10 nSec
- Green LED Indicator
- All Mode Protection (+ to Ground, - to Ground, + to -)
- Available in 12 to 350 VDC
- 1 Year Standard Warranty

## ▶ STANDARDS MET

- UL 497A — IEEE C62 3rd Party Tested

## TECHNICAL INFORMATION

**ACT 421-XXX-040-101** 40 kA SINGLE Protector designed for indoor and weather resistant locations (+ or - protection to Ground)

**ACT 421-XXX-040-102** 40 kA DUAL Protector designed for indoor and weather resistant locations (+ AND - to ground)

**ACT 421-XXX-040-201** 40 kA SINGLE Protector designed for Outdoor / buried locations (+ or - protection to ground)

**ACT 421-XXX-040-202** 40 kA DUAL Protector designed for Outdoor / buried locations (+ AND - to ground)

## ▶ MECHANICAL SPECIFICATIONS

**Dimensions:** INDOOR 3"x 3"x2" (75 mm x 75mm x 50 mm)  
OUTDOOR 4"x4"x2"(100 mm x 100mm x 50 mm)


**Weight:** 18 oz (510 g) and 32 oz (1.2 kg)

## ▶ ELECTRICAL SPECIFICATIONS

**DC Voltage Levels:** (XXX) 015, 030, 060, 150, 300

**Max Current:** (8x20us) 40kA

**Technology:** MOV / Gas Tube

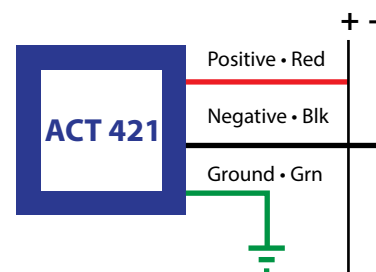

# ACT 446 Dual Cable Location Protector

## Surge Protector System



### ▶ ACT 446 Dual Cable Location Outdoor/Indoor Protectors

The ACT 446, as part of the ACT 44X Cable Locating Protection Family, can be installed for both indoors or outdoor applications. The solid-state hybrid surge protection system is installed between the cable sheath and earth ground. Their primary function is to increase the cable locating tone range and efficiency and protect buried cable and personnel from high-energy surges. This unit may be installed either underground (waterproof), above ground (weather proof) or pedestal mounted. Proper installation and location of these devices allows greater than 75 miles of cable location from one transmitter.

### ▶ RECOMMENDED LOCATIONS

- Buried Fiber Locations
- Pedestal Locations
- Indoor Locations

### ▶ FEATURES AND BENEFITS

- Extends Cable Locations over 75 miles
- MOV/Gas Tube Hybrid Technology
- 5-Year Standard Warranty

### ▶ STANDARDS MET

- Safety – Meets UL497
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED

### ▶ PART NUMBERS

Model	Enclosure Type	System
ACT 446-XXX-	212	Dual Protector in Weatherproof enclosure with shorting bar 4"x4"x2" Enclosure
ACT 446-XXX-	302	Dual protector for Waterproof (Potted) with 6' 6 awg cable stubs 4"x4"x2" Enclosure
ACT 446-XXX-	400	Dual Protector for pedestal mount 3"x3"x2" Enclosure Comes WITHOUT shorting bar
ACT 446-XXX-	410	Dual Protector with shorting bar for pedestal mount 3"x3"x2" Enclosure

Part Number Example: ACT 446-150-410  
 \*Custom voltage and cable configurations are available

ACT 446M is optional mounting plate available for ACT 446 - 400 series products


\*Also use ACT 4400-150 System




# ACT 446 Dual Cable Location Protectors

Surge Protector System

## ACT 446-150-410 – Pedestal Mount

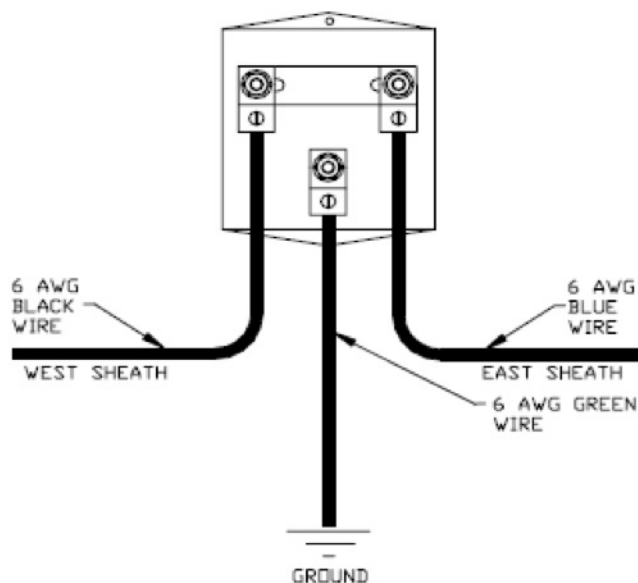

## Weather Proof Enclosure

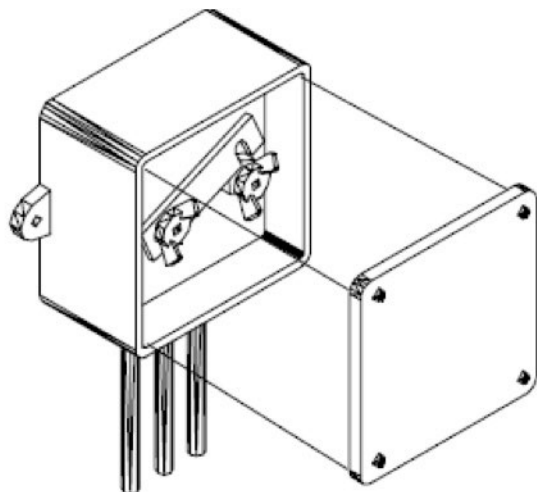

ACT 446-XXX-212

## TECHNICAL INFORMATION

### PHYSICAL SPECIFICATIONS

**ACT 446-XXX-2YZ family** Installed in 4"x4"x 2" weather resistant enclosures

**ACT 446-XXX-3YZ family** Installed in 4"x4"x2" waterproof closures

**ACT 446-XXX-4YZ families** Installed in a 3"x3"x2" indoor enclosure  
*Requires installation inside a pedestal if installed outside*

**XXX** – Option signifies voltage application (050V, 150V, 350V)

**Y** – Option "0" No shorting bar "1" with shorting bar

**Z** – Option "0" No cable "2" 6 foot of 6 AWG stranded cable (Black & Green)

### ELECTRICAL SPECIFICATIONS

Voltage Applications RMS: 50V, 150V, 350V, 650V

Clamping Voltage (@ 1mA DC):  
(+10% voltage variance) 95V, 210V, 430V, 720V

Peak Current (8x20μS): 42,000 Amps

Energy Dissipation (10x1000μS): 1600 joules

Response Time: 1.5 Nanoseconds

Capacitance @ 5KHz: 4004pf

**ACT 446 M option is a 16 awg aluminum back mounting plate for the ACT 446-150-410 module. Mounting Plate sold separately.**

# ACT SS64 & SS65 Data/Signal Line Family

## Industrial Data Protection Device



- ▶ The ACT SS64 & SS65 Stainless steel Pipe enclosed protection device is designed to protect data and signal lines in the harshest industrial environments.

This hybrid device combines the strength of gas tube protection with silicon avalanche technology as designed by Bell Labs. In rush current protection is provided by resettable fuses (PTC). This means accidental fault current does not destroy this protector.

This unit is fully encapsulated and is waterproof inside a stainless steel pipe providing an extremely safe installation package.

The ACT SS64 & SS65 is designed to protect any 4-20 mA alarm or control lines.

### Two Protection Styles:

The SS64 is a two wire protector.

The SS65 is a two wire and ground protector.

### ▶ RECOMMENDED LOCATION

- Waste Water Treatment Facility
- Petroleum Locations
- Outdoor Alarm Systems
- Electronic Lock Locations
- Cell Sites
- Well Pumps

### ▶ FEATURES AND BENEFITS

- **2 Modes of Discrete Protection:**  
SS64 protects a single pair T-R; SS65 protects single pair plus cable shield(drainwire) T-R&G
- **Two mounting applications:**  
End to End and End to Cap configuration
- Multi-Stage Hybrid (Gas Tube & Diode) Technology
- 5 -Year Standard Warranty

### ▶ STANDARDS MET

- Safety tested to UL487B
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED

- Survives 1,000 (C2 6kV / 500A)

### ▶ GENERAL TECHNICAL SPECIFICATIONS

Response Time: < 1 Nanosecond

Maximum Signal Voltage: 28 V Max

DC Clamping Level (L-G): 36 V ±10%

DC Clamping Level (L-L): 72 V ±10%

Peak Surge Current: 10 kA (8x20 μs)

#### Maximum let-thru Voltage:

Line-to-Ground (10x700 μs) 44V @ 400 A

#### Maximum let-thru Voltage:

Line-to-Line (10x700 μs) 90 V @ 400 A

Series Resistance (per conductor) 5V (typical)

#### Capacitance:

(Zero Volts Bias)

(L-L) 600 pf typical

(L-G) 1200 pf typical







Number of Occurrences: 400 @ 500 Amps (10x1000 μs)

**Caution:** The hybrid design of this product includes series resistance. Do not place this product in service on any signal lines capable of supplying more than 150 milliamperes continuously.

# ACT SS64 & SS65 Data/Signal Line Family

## Industrial Data Protection Device

### TYPICAL APPLICATIONS

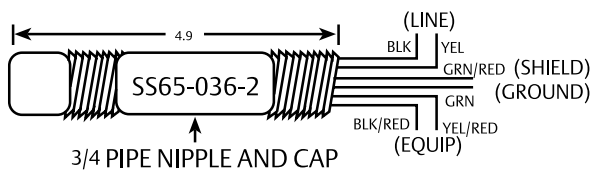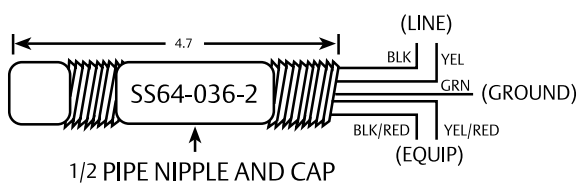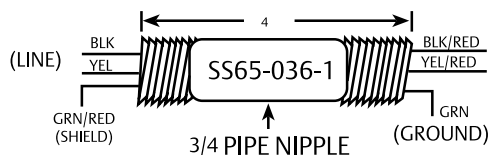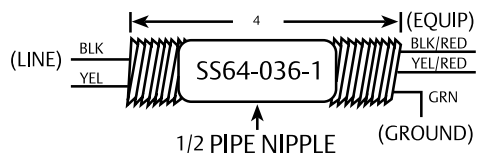

### PART NUMBERS

**ACT SS64-036-10-01** Dual line 10kA surge data protector in 1/2" pipe end to end

**ACT SS64-036-10-02** Dual line 10kA surge data protector in 1/2" pipe Capped end

**ACT SS65-036-10-01** Dual line with Ground 10kA surge data protector in 3/4" pipe leded end to end

**ACT SS65-036-10-02** Dual line with Ground 10kA surge data protector in 3/4" pipe capped leded end

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device



- ▶ Power Quality is more important today than ever before and that means not just any surge protector can be relied on to protect your sensitive equipment.

The ACT 450 LT Series Filter Protector is a cost effective compact design made specifically for commercial and industrial applications like Waste Water, HVAC, Refrigeration, Solar and Wind projects and Industrial Controls.

These UL 4th edition protectors are individually fused for maximum safety with a visual indicator light to show if the product is properly working.

## ▶ FEATURES AND BENEFITS

- Filter located on all modes of operation
- 7 modes of discrete protection (L-G, L-N and N-G)
- 10 modes of protection (L-N, L-G, N-G, L-L)
- Green status indicating light
- Individually fused MOV technology
- 1-year standard warranty
- Can be wired SERIES, PARALLEL and KELVIN
- 15 and 30 Amp version  
*(note: Product must be wired behind 30 Amp breaker or less to meet UL 1449)*

## ▶ STANDARDS MET

- Safety – ETL Recognized to UL1449 4th Edition
- ANSI/IEEE C62.41, C62.45
- ANSI/NFPA 70 National Electrical Code
- Filter Mil Spec Standard 220B

## ▶ 3RD PARTY TESTED

# ACT 450 LT Series Filter Protector

A DIN Rail Mounted Surge Protection Device

## TECHNICAL INFORMATION

### ▶ PERFORMANCE SPECIFICATIONS

MODEL NUMBER	MODE	A1 Ring 2kV, 67A	A3 Ring 6kV, 200A	B3/C1 6kV, 3kA
<b>450-LT15-024-030</b>	L-N	58	87	176
5 - 30 VCD/VAC	L-G	48	84	167
15 Amp 30kA	N-G	48	84	167
<b>450-LT15-048-030</b>	L-N	58	123	201
5 - 50 VCD/VAC	L-G	53	111	196
15 Amp 30kA	N-G	53	111	196
<b>450-LT15-120-030</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
15 Amp 30kA	N-G	55	131	433
<b>450-LT15-240-030</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
15 Amp 30kA	N-G	63	257	721
<b>450-LT30-120-050</b>	L-N	91	207	486
5 - 150 VCD/VAC	L-G	55	131	433
30 Amp 50kA	N-G	55	131	433
<b>450-LT30-240-050</b>	L-N	183	325	780
5 - 300 VCD/VAC	L-G	63	257	721
30 Amp 50kA	N-G	63	257	721

### EMI/RFI Filter Attenuation - Mil Standard 220B

FREQUENCY	ATTENUATION IN dB
1 kHz	1.3
10 kHz	11
100 kHz	31
500 kHz	30
1 MHz	31
10 MHz	15
20 MHz	8

### ▶ MECHANICAL SPECIFICATIONS


Dimensions	See Drawing
Weight	Approx. 1.0 lbs
Enclosure	ABS Plastic UL94
Operating Temp	-40F to +140F -40C to +65C
Non-condensing Humidity	5% to 95%

### ▶ ELECTRICAL SPECIFICATIONS

Connection Method	Series, Parallel and Kelvin
Protection Modes (7 Modes)	L-N, L-G, L-L, N-G
Wired	#22AWG - #14AWG
Status Indicators	Green LED
Filter - Mil Std 220B	30dB @ 500kHz
100 kAIC short circuit current rating with a 15 amp max class T fuse	
15 and 30 Amp versions	

### ▶ DIMENSIONS

15 Amp	3.94"H x 1.4"W x 2.28"D
30 Amp	3.94"H x 2.80"W x 2.28"D

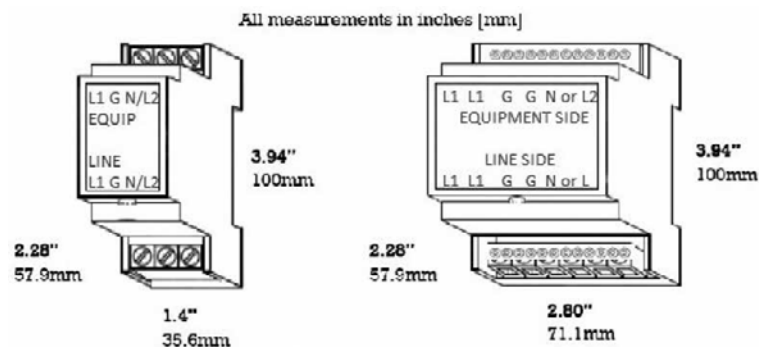



# TELECOM / DATA PROTECTION



# ACT 422 Telephone and Alarm Protector



## Available in four versions:

ACT 422-180-RJ11 series is the most common configuration for telephones

ACT 422-005-RJ45 is the most common configuration for Alarms and Data line protection under +05 volts

ACT 422-060-PoE is most common for Power over Ethernet and Alarm circuit applications

ACT 422-CAT6-101 is most common for High-speed Ethernet

## FEATURES AND BENEFITS

- Robust Design – 10kA (8x20uSec)
- Uses dual Hybrid Protection design
- Transient Silicon Diode Technology
- Fast Response Time < 1 nSec
- Extremely low let through voltages
- Absorbs and Dissipates surges within the unit
- All Mode Protection (T-R, T-G, R-G)
- 1 Year Standard Warranty
- All units shipped with male-to-male patch cord

## STANDARDS MET

- UL 497A
- ANSI/IEEE C62
- 3rd Party Tested

## TECHNICAL INFORMATION

**ACT 422-180-RJ11** 4-Wire Telephone  
RJ-11 Socket to RJ-11 Socket

**ACT 422-005-RJ45** 8-Wire Ethernet, Data and Alarm  
RJ-45 Socket to RJ-45 Socket

**ACT 422-060-PoE** 8-Wire Power over Ethernet  
RJ-45 Socket to RJ-45 Socket

**ACT 422-CAT6-101** 8-Wire Power over Ethernet  
RJ45 10/100/1000 Base-T Ethernet

*All units shipped with 12" male-to-male patch cord.*

## MECHANICAL SPECIFICATIONS

**Dimensions:** 4" x 1" x 1" (100 mm x 25mm x 25 mm)  
**Weight:** 6 oz (170 g)

## RECOMMENDED LOCATION

- Residential & Commercial Telephone
- Alarm Lines
- Datacom Lines
- High-Speed Ethernet

## ELECTRICAL SPECIFICATIONS

Model	Telephone	Data	PoE
Nominal Working Voltage <b>Un</b>	180V	5V	48V
Max. Continuous Operating Voltage <b>Uc</b>	250V	7.5V	70V
Nominal Load Current <b>IL</b>	10A		
Nominal Discharge Current <b>In</b> (8/20 $\mu$ s)	2.5Ka		
Max Discharge Current <b>I<sub>max</sub></b> (8/20 $\mu$ s)	10Ka		
Limiting Voltage <b>Up</b>	<300V	$\leq$ 15v	$\leq$ 0.25KV
Response Time <b>ta</b>	$\leq$ 1ns		
Data Rate <b>Vs</b>	1Mbps	100Mbps	
Insertion Loss <b>Ae</b>	$\leq$ 0.5dB		
Connector Type	RJ11	RJ45	
Protection Pin		Pin1/2, 3/6	Pin4/5, 7/8
Dimensions	4.09 X 1.57 X .98 inches (104x40x25mm)		
Working Environment	-40°C ~ +80°C, Relative humidity : $\leq$ 95%		
Protection Level	IP20		

# ACT 422 D-sub Serial Surge Protection Device



▶ ACT 422 D-sub Serial Surge Protection Device is capable of connecting in series with any DB-Sub cable including EIA/RS485, V.24/RS232, V.11/RS422, providing full protection on all pins used in industrial and commercial serial communication systems.

## ▶ RECOMMENDED LOCATION

- Residential and Commercial
- Alarm Lines

## ▶ STANDARDS MET

- Designed to meet:
  - » EIA RS485, RS232, RS422
  - » UL497, UL497A, UL497B
  - » UL1459
  - » IEC 61643-21

## ▶ FEATURES AND BENEFITS



- Robust Design - 3Ka (8x20uSec)
- Solid State Protection
- Fast Response <1 nSec
- Absorbs and Dissipates surges within the unit
- 1 Year Standard Warranty

## ▶ TECHNICAL DATA



Model	ACT 422-024-DB9	ACT 422-024-DB15	ACT 422-024-DB25
Nominal operating voltage: Un	24V		
Max. continuous operating voltage: Uc	30V		
Nominal discharge current: In (C2)	300A		
Max. discharge current: Imax (C2)	1000A		
Voltage protection level: (C2) Up	L-L: ≤27V L-PE: ≤300V		
Response time: ta	≤1nS		
Signal transmission rate: Vs	40Mbps		
Insertion loss: Ae	≤0.3dB		
Dimensions	2.20 x 1.34 x 0.63 Inches (56x34x16mm)		2.48 x 2.2 x .66 Inches(63x56x17mm)
Housing material	ABS flame retardant plastics- UL94-V0		
Housing color	Milky White Black		
Working environment	Temperature:   40°C~ + 85°C~ Relative humidity: ≤95%		
Shell protection grade	IP20		

# ACT 422 D-sub Serial Surge Protection Device



## DIMENSIONS AND ELECTRICAL DIAGRAM

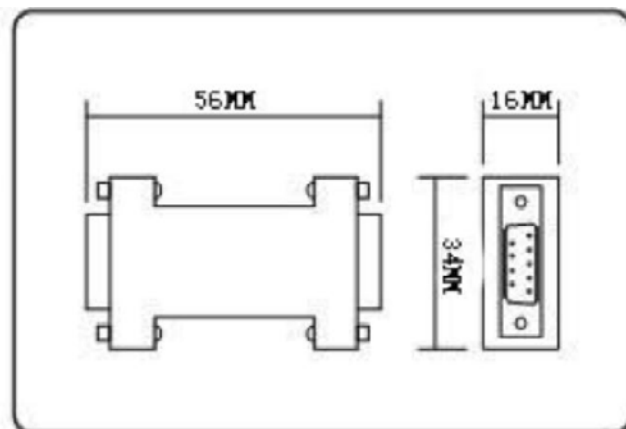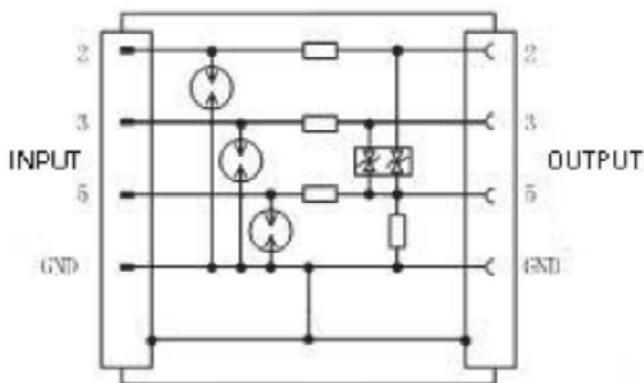

ACT 422-024-DB9

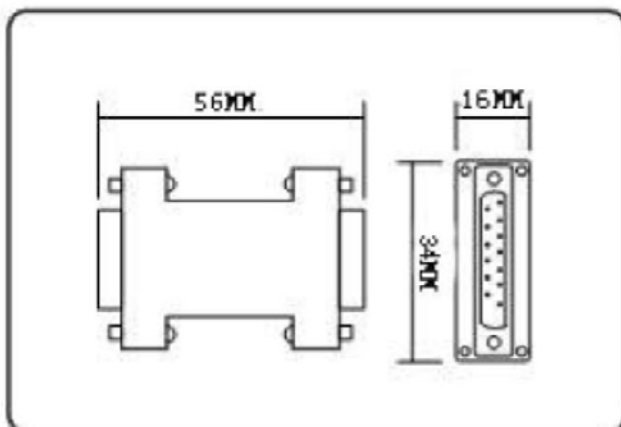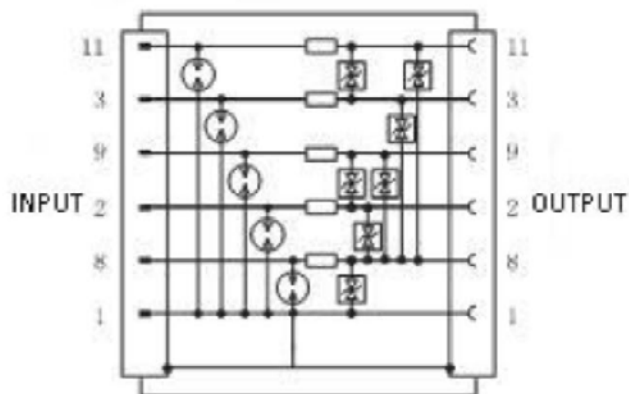

ACT 422-024-DB15

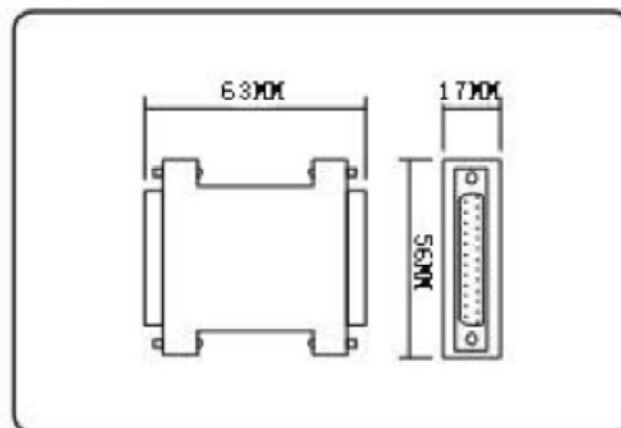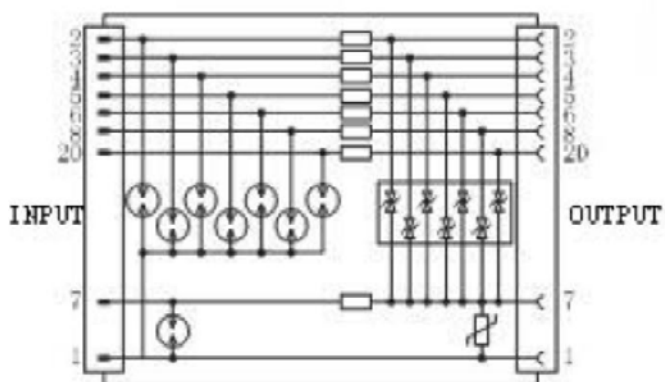

ACT 422-024-DB25

# ACT 422-XXX-200 Series Protector

Telephone, Data, Control Line and Alarm Protectors



201

202

203

▶ With the increases in the sensitivity of commercial and residential electronic equipment, the ACT 422 200 Series DIN rail protector is perfect for preventing lightning and noise transient surges from entering into your building through the telephone or alarm cables damaging your sensitive IT equipment like computers, industrial controls, faxes and telephone equipment.

The ACT 422 200 Series is a series connected protector with screw terminals on both Line and Equipment side of the protector. is designed with a hybrid multi-stage design that the first stage gas tube robustly protects against heavy lightning surges, while the second stage Diodes insures that only a minimal let-through voltage is passed on to your electronic equipment.

The ACT 422 is an "All Mode" telecom / datacom protector that protects all lines modes of the connector for Tip to Ground, Ring to Ground and Tip to Ring.

## ▶ RECOMMENDED LOCATION

- Residential & Commercial Telephone
- Alarm Lines
- Datacom and Control Lines

## ▶ FEATURES AND BENEFITS

- Robust Design – 10kA (8x20uSec)
- Uses dual Hybrid Protection design
- Transient Silicon Diode Technology
- Fast Response Time < 1 nSec
- Extremely low let through voltages
- Absorbs and Dissipates surges within the unit
- All Mode Protection (T-R, T-G, R-G)
- 1 Year Standard Warranty

## ▶ STANDARDS MET

- UL 497A — ANSI/ IEEE C62
- 3rd Party Tested

## ▶ TECHNICAL INFORMATION

- ACT 422-XXX-201** Single pair protector with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-202** Dual pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-203** Three pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-204** Four pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**
- ACT 422-XXX-206** Six pair protectors with screw terminal post at both Line and Equipment side.  
**DIN Rail Mounting**

Where XXX = 005, 024, 048, 110, 180 Volts DC

# ACT 422-XXX-200 Series Protector


## MECHANICAL SPECIFICATIONS

Dimensions: 90 mm x 18 mm x 62 mm  
 Weight: 150g

## ELECTRICAL SPECIFICATIONS

Max Current (8x20us) 10kA  
 Transfer Speed 10 Mbps  
 dB Loss <0.5  
 Connector Type Screw Terminals

Operating Voltage	Nominal Breakdown	Clamp Voltage (8x20 us 3,000 amps)
05V	<15V	70V
24V	<40V	90V
48V	<150	300V
110	<300V	350V
180V	<300V	350V

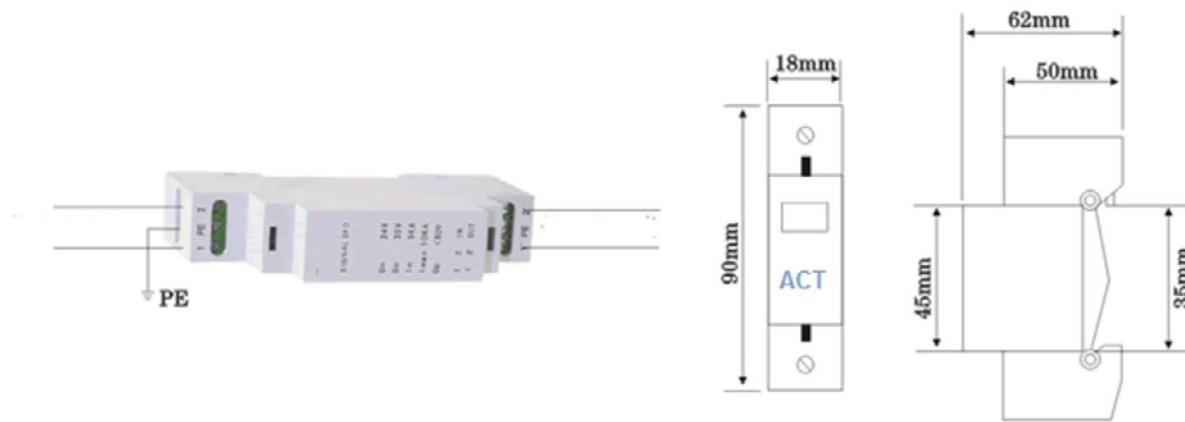

# ACT 422 DLU Family

A DIN Mounted Data / Telephone Protection Device



- ▶ The ACT 422 DLU and DLU2 family of Din rail mounted surge protectors are resettable and are designed to protect your sensitive datacom, telephone, and instrumentation equipment against harmful lightning surges and electrical transients.

These surge protectors must be installed on a symmetrical DIN rail and are available for transmission lines ranging from 6 - 170Vdc and can handle transmission speeds up to 10 Mbps.

These surge protectors utilize a hybrid technology consisting of Gas Tube and fast clamping diodes that combine an ultra-fast response time (<1 ns) and a higher power handling capability of 20 kA.

The DLU protects 1 pair (2 wires) and the DLU2 protects 2 pairs (4wires). These surge protectors protect the shield to ground via gas tube and offer direct earth grounding via the din rail clip.

## ▶ RECOMMENDED LOCATION

- Commercial & Industrial

## ▶ FEATURES AND BENEFITS

- DIN Rail Mounting
- All types of Telephone and Data Lines
- Monoblock Housing
- Single and Dual pair versions
- Transmission and protection of shield wire (DLU)
- 1 Year Standard Warranty

## ▶ STANDARDS MET


- Safety – UL Listed
- IEC 61643-21 Compliant
- ANSI/IEEE C62.41, C62.45



# ACT 422 DLU / DLU2 DIN Mounted Family


## 2-pair version: DLU2

Part Number	DLU2-170	DLU2-48D3	DLU2-24D3	DLU2-12D3	DLU2-06D3	DLU2-06DBC
Typical Application	Telephone line ADSL	48 V line	4-20 mA 24 V line	RS232	RS422	T2 - T1 10BaseT
Configuration	2 pairs	2 pairs	2 pairs	4 wires	2 pairs	2 pairs
Nominal line voltage (Un)	150 V	48 V	24 V	12 V	6 V	6 V
Max. line voltage (Uc)	170 V	53 V	28 V	15 V	10 V	10 V
Max. line current	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA
Protection level (Up) 8/20 $\mu$ s impulse - 5kA	220 V	70 V	70 V	30 V	20 V	25 V
Nominal discharge current (In) 8/20 $\mu$ s impulse - 10 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Max. discharge current (Imax) 8/20 $\mu$ s impulse - 1 time	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Impulse current (Iimp) 10/350 $\mu$ s impulse - 2 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Type of diagram	D	C	C	C	C	C
End of life	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit
Mechanical characteristics	Monobloc Symmetrical DIN rail mounting Dimensions: See drawing Screw terminal connection - min/max: 22/16 AWG Housing material: Thermoplastic UL 94-V0 Ground connection via DIN rail (DLU, DLU2) and screw terminal (DLU).					

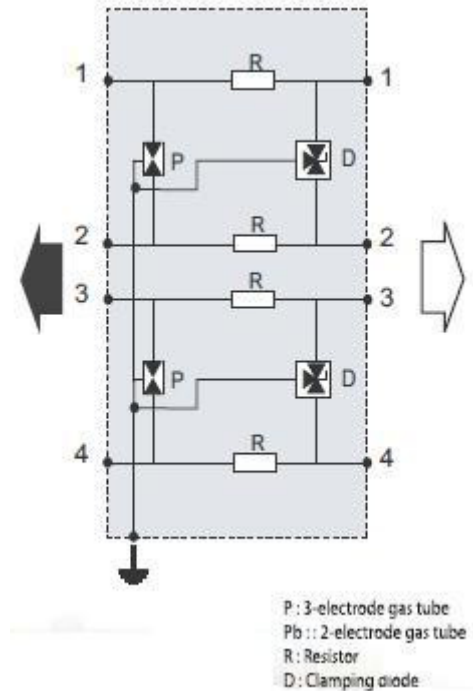

## 1-pair version: DLU

Part Number	DLU-170	DLU-48D3	DLU-48DBC	DLU-24D3	DLU-12D3	DLU-12DBC	DLU-06D3	DLU-06DBC
Typical Application	Telephone line ADSL	48 V line	Fipway WorldFIP Fieldbus-H2	4-20 mA 24 V line	Profibus-FMS interbus Fieldbus-H1 Batibus	Profibus-DP LONwork	RS485	6 V line high bitrate
Configuration	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield	1 pair + shield
Nominal line voltage (Un)	150 V	48 V	48 V	24 V	12 V	12 V	6 V	6 V
Max. line voltage (Uc)	170 V	53 V	53 V	28 V	15 V	15 V	10 V	10 V
Max. line current	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA	300 mA
Protection level (Up) 8/20 $\mu$ s impulse - 5kA	220 V	70 V	75 V	40 V	30 V	35 V	20 V	25 V
Nominal discharge current (In) 8/20 $\mu$ s impulse - 10 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Max. discharge current (Imax) 8/20 $\mu$ s impulse - 1 time	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA	20 kA
Impulse current (Iimp) 10/350 $\mu$ s impulse - 2 times	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA	5 kA
Type of diagram	D	D	D	D	D	D	C	C
End of life	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit	Short-circuit
Mechanical characteristics	Monobloc Symmetrical DIN rail mounting Dimensions: See drawing Screw terminal connection - min/max: 22/16 AWG Housing material: Thermoplastic UL 94-V0 Ground connection via DIN rail (DLU, DLU2) and screw terminal (DLU).							

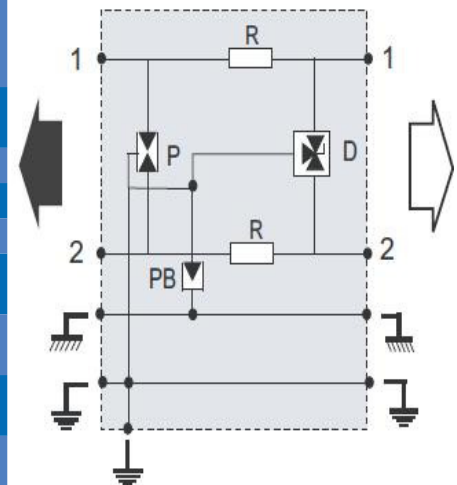

# ACT 423 Coax / Video Surge Arrestors

## Coax Transient Surge Arrestor



▶ The ACT 423 is a series coax transient surge arrestor specifically designed for closed circuit television monitoring, security systems and satellite communications systems. This series connector surge arrestor is designed to monitor the video signal and coaxial signal transmission level and to quickly react to any over voltages that may be caused by transient surges. This Gas Tube / Diode Hybrid protector has been specifically designed to protect sensitive electronic equipment like video cameras and video drivers from lightning and other surges induced on the coax line. With the secondary stage having diodes, this small protector is able to respond to transient surge in less than one nanosecond.

This Coax Protection family comes in three families, single coax protector, Coax and DC protector and Coax, DC and Cradle Head Control protection.

### ▶ RECOMMENDED LOCATION

- Solar or Wind Generation Systems
- Telecom Battery Systems
- Any application using DC voltages outdoors

### ▶ FEATURES AND BENEFITS

- Robust Design – 10kA (8x20uSec)
- Extremely low let through voltages
- Fast Response Time < 1 nSec
- Up to 10 Mbps Transfer Speeds
- Hybrid Design uses Gas Tube / Diodes
- 1 Year Standard Warranty

### ▶ 3RD PARTY TESTED

- UL 497A
- IEEE C62

### ▶ TECHNICAL INFORMATION

**ACT 423-005-10X** Single Coax protector with two female BNC (01) or N (02) type connectors

**ACT 423-005-201** Coax protector with DC power protector, includes two female BNC (01) type connectors and screw terminal block for DC power

**423-005-301** Coax protector with both DC power and Cradle Head power/control and includes two female BNC (01) type connectors and screw terminal block for DC power

### ▶ MECHANICAL SPECIFICATIONS

<b>Dimensions:</b>	<b>BNC or N Coax Protector</b> 3.5" x 1" (90 mm x 25mm)
	<b>BNC Coax &amp; DC Protector</b> 5" x 2.5" x 1 3/4" (125mm x 65mm x 47mm)
	<b>BNC Coax, DC and Cradle</b> 5" x 4.5" x 2" (125mm x 115mm x 50mm)

**Weight:** 18 oz (510 g) to 36 oz (1.2 kg)

# ACT 423 Coax / Video Surge Arrestors


## ELECTRICAL SPECIFICATIONS

**Max Current (8x20us)** 10kA  
**Transfer Speed** 10 Mbps  
**dB Loss** <0.5  
**Connector Type** Screw Terminals

	Video Coax Protector	DC Power	Cradle Head Control
Working Voltage	5V	24	24
Continuous Voltage	8V	40	40
Standard Discharge (qty 10)	5 kA	10 kA	10 kA
Maximum Discharge (qty 1)	10 kA	20 kA	20 kA
Transfer Speed	10 Mbps	N/A	N/A
Loading Current	N/A	SA	SA
Plug In Loss (dB)	<0.2	N/A	N/A



ACT 423-005-101 (BNC)

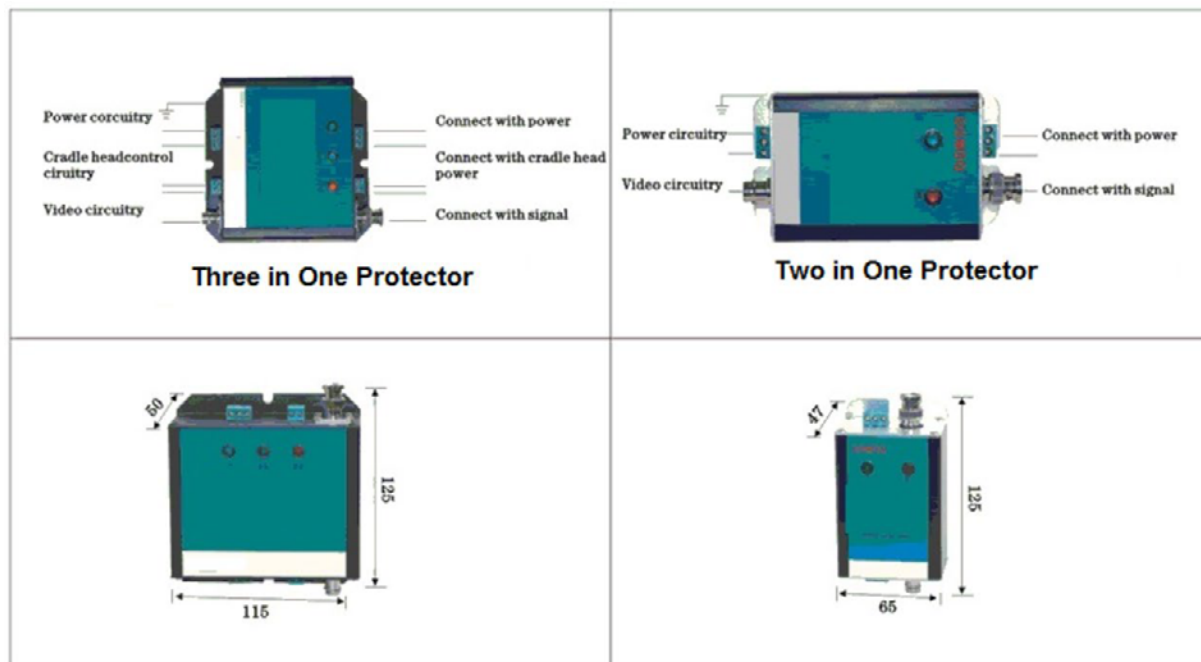

ACT 423-005-201 (BNC)

ACT 423-005-301 (BNC)


# ACT 423 Installation Instructions

The BNC (01) and N (02) connector models can be used with any coaxial cable system. The following diagram is an example. Disconnect existing male BNC connector cable connected on the camera female BNC. Connect the ACT 423 Cable Protector to camera and then connect the coax cable male connector to the ACT 423 Female BNC. Verify proper operation by checking the picture quality of camera output.

## ACT 423-005-101 BNC Video Protector

- 1 Connect the Male BNC connector of the existing coax to the Female BNC connector on the BNC-C/V


- 2 Connect the BNC-C/V Male end to the Female connector on the camera

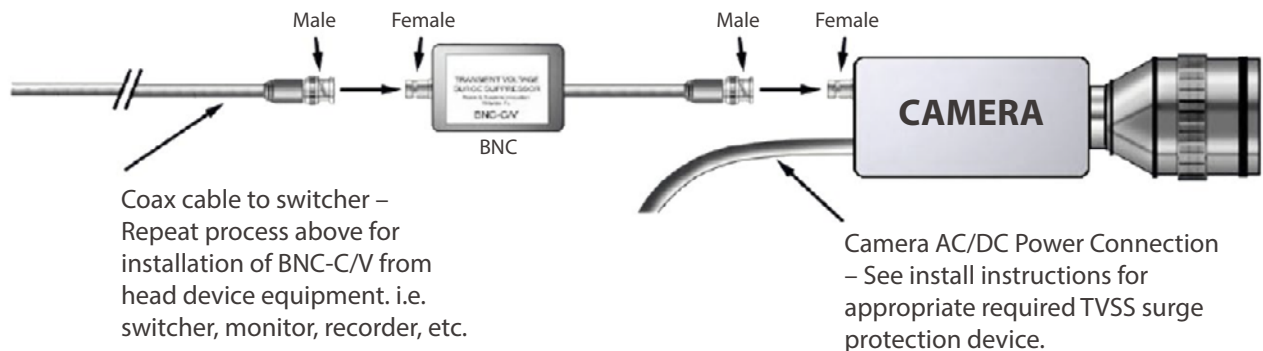

## ACT 423-005-201 BNC Video and DC Power Protector


- 1 Connect the Male BNC connector of the existing coax to the Female BNC connector on the BNC-C/V

- 2 Connect the BNC-C/V Male end to the Female connector on the camera

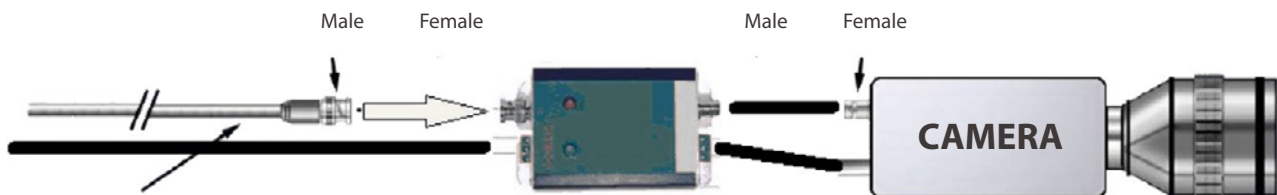

# ACT 424-GT Series

## Gas Tube RF

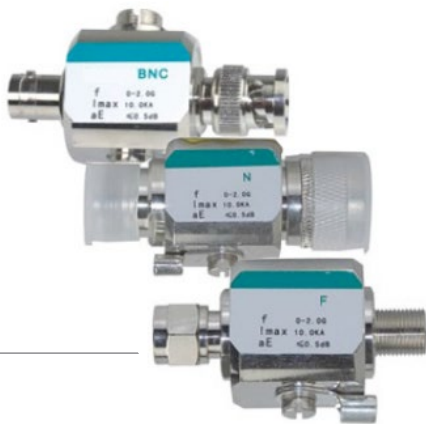

- ▶ With the increases in the sensitivity of telecom and cellular equipment, the ACT 424-GT is a coax surge arrestor built to pass DC voltage while sustaining multiple lightning surges and quickly restoring itself back to normal for the next surge.

The ACT 424 is a primary series connected surge arrestor with a choice of BNC, N, F, TNC, and SMA type connectors (Male to Female). The Coax Protector protection technology is designed with a robust gas tube design that allows both signal and dc to pass through the protector.

### ▶ RECOMMENDED LOCATION

- Rail Road
- Commercial Telephone
- Wireless Telephone
- Cable Television



*Inspected and Tested in the USA*

### ▶ FEATURES AND BENEFITS

- Passes DC-25GHz
- Robust Design – 20kA (8x20uSec)@ <550V
- Uses Gas Tube Protection design
- Fast Response Time < 100 nSec
- Extremely low insertion loss <0.2 dB
- Absorbs and Dissipates surges through ground
- 1 Year Standard Warranty

### ▶ STANDARDS MET

- UL 497A
- ANSI/ IEEE C62
- 3rd Party Tested

### ▶ TECHNICAL INFORMATION


XXX	Voltage	65V, 90V, 350V
ACT 424-GT-XXX-YYY-MF	YYY	Connector Type BNC TNC F SMA
MF	MALE to FEMALE	

### ▶ ELECTRICAL & MECHANICAL SPECIFICATIONS

Connector Type	BNC	TNC	F	SMA	N
Working Frequency (GHz)	0-2.5G	0-2.5G	0-2.5G	0-2.5G	0-2.5G
Impedance (Ohms)	75	50	75	75	50
Nominal Breakdown Voltage	65-90	65-90	65-90	65-90	65-90
Max Discharge Current (8x20uS)	20kA	20kA	20kA	20kA	20kA
Max Voltage Breakdown	<550V	<550V	<550V	<550V	<550V
Insertion Loss (dB)	<0.2	<0.2	<0.2	<0.2	<0.2
Working Temperature (deg C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Typical Size (mm)	69.0 x 32 x 32	69.0 x 32 x 32	69.0 x 32 x 32	69.0 x 32 x 32	69.0 x 32 x 32
Continuous Power	60W	60W	60W	60W	60W

# ACT 424-GT Series

## Gas Tube RF

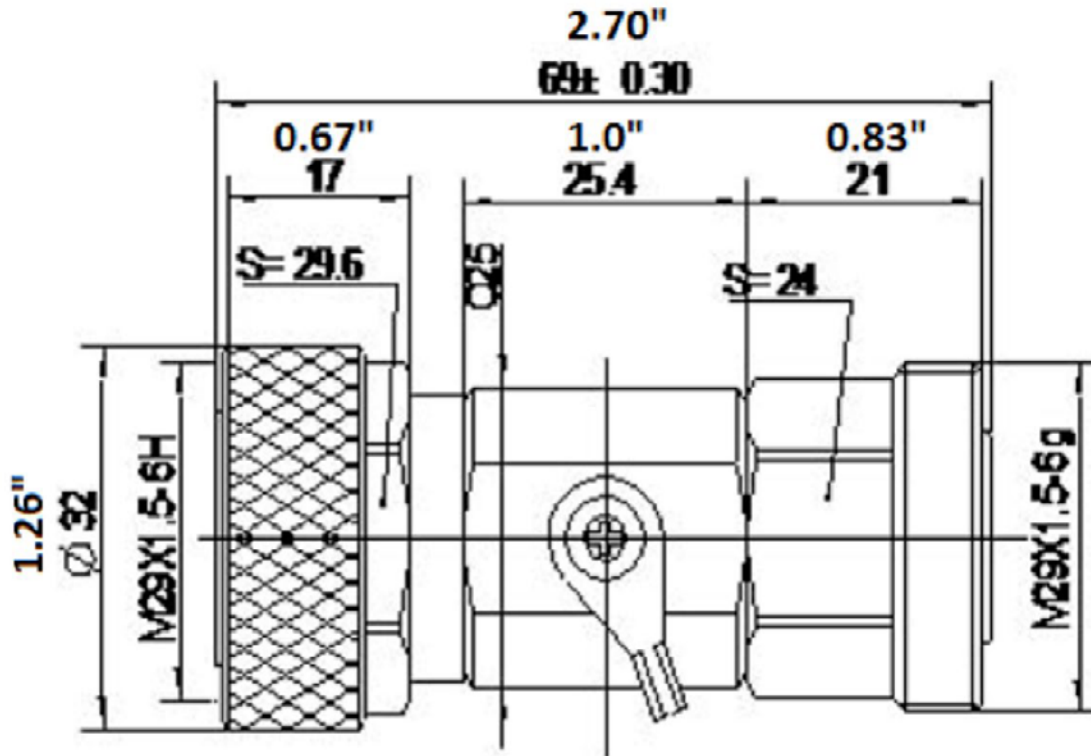


### TYPICAL SPECIFICATIONS

Connector:	Male / Female
Frequency Range:	DC – 2500 MHz
Impedance (Connector Dependent):	50 Ω
Insertion Loss	≤ 0.2dB
Rated D.C. Voltage:	90/230/350 DC
Discharge Capacity:	20 kA
Contact Resistance (in ohms):	≤ Ω 0.4 m
Voltage Standing Wave Ratio:	≤ 1.2
Continuous Power (Watts):	60 W
Temperature Range (in C):	-40 - +85 deg C



# ACT 424-1/4W Quarterwave Protector

## RF Coax Surge Arrestor

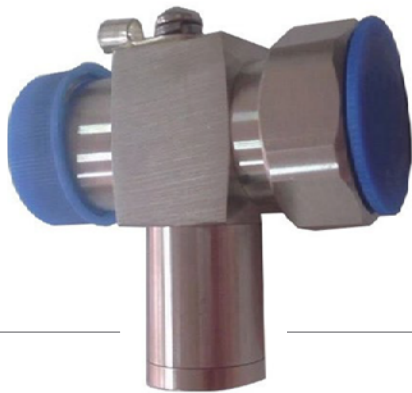

- ▶ With the increases in the sensitivity of telecom and cellular equipment, the ACT 424-1/4 is a coax surge arrestor built to sustain multiple lightning surges and quickly restore itself back to normal for the next surge.

The ACT 424-1/4 is a robust, primary series connected surge arrestor with a choice of BNC, N, F, TNC, and SMA type connectors (Male to Female). The Coax Protector protection technology is designed with a 800-2,500 MHz design that allows signal and dc to pass through the protector.

### ▶ RECOMMENDED LOCATION

- Rail Road
- Commercial Telephone
- Wireless Telephone
- Cable Television

### ▶ FEATURES AND BENEFITS

- Robust Design – 40kA (8x20uSec)@ <550V
- Uses Robust 1/4 Wave Protection Design
- Fast Response Time < 100 nSec
- Extremely Low Insertion Loss ≤.25 dB
- Absorbs and Dissipates Surges Through Ground
- 1 Year Standard Warranty

### ▶ STANDARDS MET

- UL 497A
- ANSI/ IEEE C62
- 3rd Party Tested

### ▶ TECHNICAL INFORMATION



ACT 424-1/4W-XXX-MF	XXX	Connector Type	BNC TNC F SMA
	MF	MALE to FEMALE	

### ▶ ELECTRICAL & MECHANICAL SPECIFICATIONS

Connector Type	BNC	TNC	F	SMA	N
Working Frequency (GHz)	800-2.5G	800-2.5G	800-1G	800-1G	800-2.5G
Impedance (Ohms)	75	50	75	75	50
Wattage	200W	200W	200W	200W	200W
Max Discharge Current (8x20uS)	40kA	40kA	40kA	40kA	40kA
Max Voltage Breakdown	<550V	<550V	<550V	<550V	<550V
Insertion Loss (dB)	≤.25	≤.25	≤.25	≤.25	≤.25
Working Temperature (deg C)	-40 to +85	-40 to +85	-40 to +85	-40 to +85	-40 to +85
Typical Size (mm)	104.4 x 57.5 x 32	104.4 x 57.5 x 32	104.4 x 57.5 x 32	104.4 x 57.5 x 32	104.4 x 57.5 x 32
Continuous Power	60W	60W	60W	60W	60W

# ACT 424-1/4W Quarterwave Protector

RF Coax Surge Arrestor

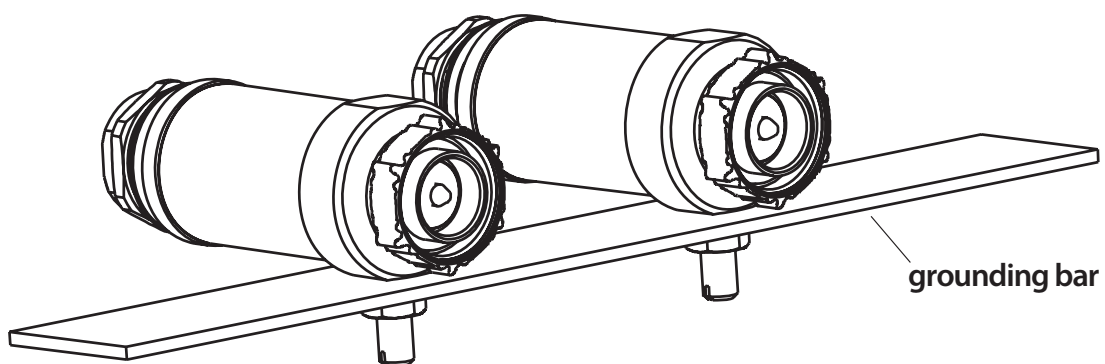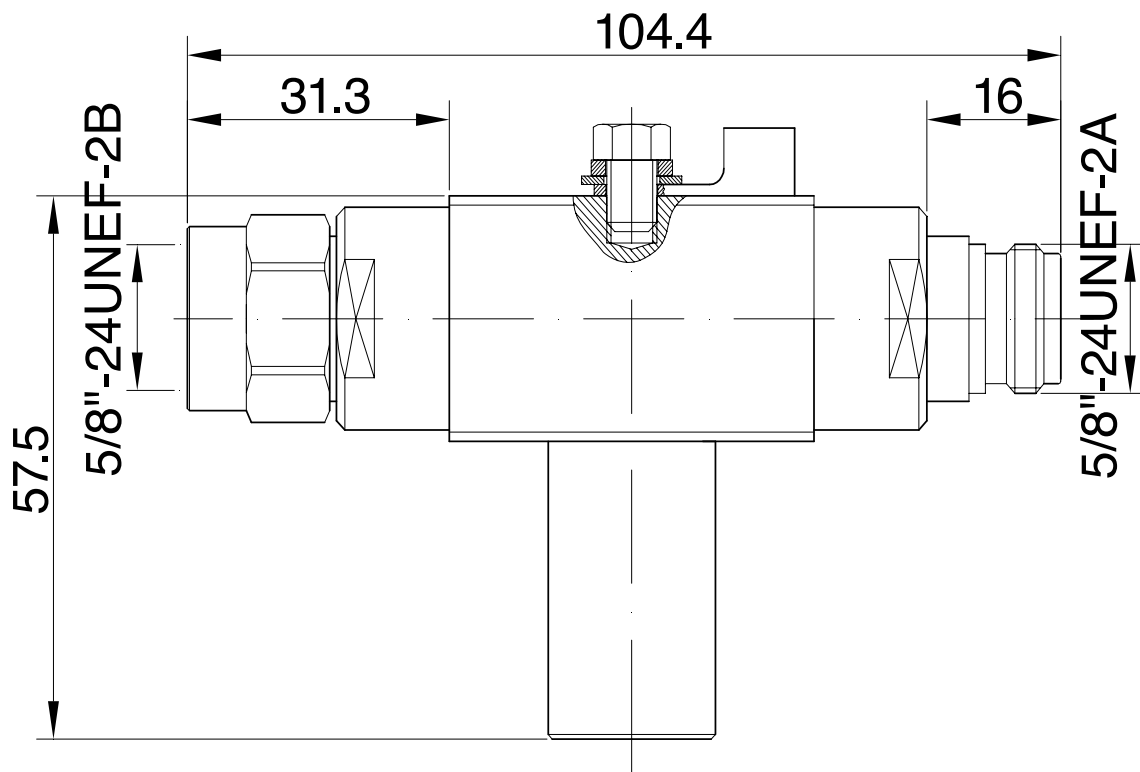

# ACT SS64 & SS65 Data/Signal Line Family

## Industrial Data Protection Device



- ▶ The ACT SS64 & SS65 Stainless steel Pipe enclosed protection device is designed to protect data and signal lines in the harshest industrial environments.

This hybrid device combines the strength of gas tube protection with silicon avalanche technology as designed by Bell Labs. In rush current protection is provided by resettable fuses (PTC). This means accidental fault current does not destroy this protector.

This unit is fully encapsulated and is waterproof inside a stainless steel pipe providing an extremely safe installation package.

The ACT SS64 & SS65 is designed to protect any 4-20 mA alarm or control lines.

### Two Protection Styles:

The SS64 is a two wire protector.

The SS65 is a two wire and ground protector.

### ▶ RECOMMENDED LOCATION

- Waste Water Treatment Facility
- Petroleum Locations
- Outdoor Alarm Systems
- Electronic Lock Locations
- Cell Sites
- Well Pumps

### ▶ FEATURES AND BENEFITS

- **2 Modes of Discrete Protection:**  
SS64 protects a single pair T-R; SS65 protects single pair plus cable shield(drainwire) T-R&G
- **Two mounting applications:**  
End to End and End to Cap configuration
- Multi-Stage Hybrid (Gas Tube & Diode) Technology
- 5 -Year Standard Warranty

### ▶ STANDARDS MET

- Safety tested to UL487B
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED

- Survives 1,000 (C2 6kV / 500A)

### ▶ GENERAL TECHNICAL SPECIFICATIONS

Response Time: < 1 Nanosecond

Maximum Signal Voltage: 28 V Max

DC Clamping Level (L-G): 36 V ±10%

DC Clamping Level (L-L): 72 V ±10%

Peak Surge Current: 10 kA (8x20 μs)

#### Maximum let-thru Voltage:

Line-to-Ground (10x700 μs) 44V @ 400 A

#### Maximum let-thru Voltage:

Line-to-Line (10x700 μs) 90 V @ 400 A

Series Resistance (per conductor) 5V (typical)

#### Capacitance:

(Zero Volts Bias)

(L-L) 600 pf typical

(L-G) 1200 pf typical








Number of Occurrences: 400 @ 500 Amps (10x1000 μs)

**Caution:** The hybrid design of this product includes series resistance. Do not place this product in service on any signal lines capable of supplying more than 150 milliamperes continuously.

# ACT SS64 & SS65 Data/Signal Line Family

## Industrial Data Protection Device

### TYPICAL APPLICATIONS

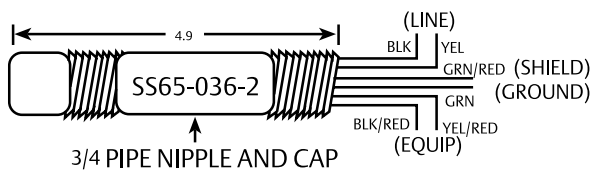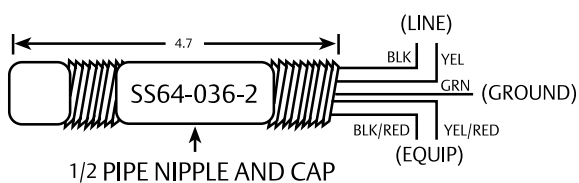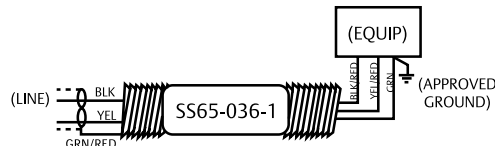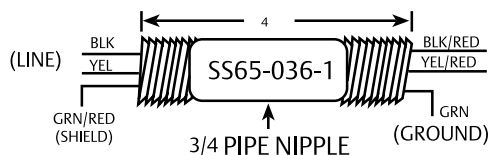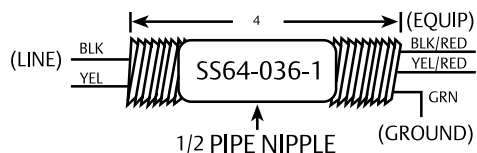

### PART NUMBERS

**ACT SS64-036-10-01** Dual line 10kA surge data protector in 1/2" pipe end to end

**ACT SS64-036-10-02** Dual line 10kA surge data protector in 1/2" pipe Capped end

**ACT SS65-036-10-01** Dual line with Ground 10kA surge data protector in 3/4" pipe led end to end


**ACT SS65-036-10-02** Dual line with Ground 10kA surge data protector in 3/4" pipe capped led end



# CABLE LOCATION PROTECTION


# CABLE LOCATION TRAINING

## ACT Protection System Starts at the Transmitter

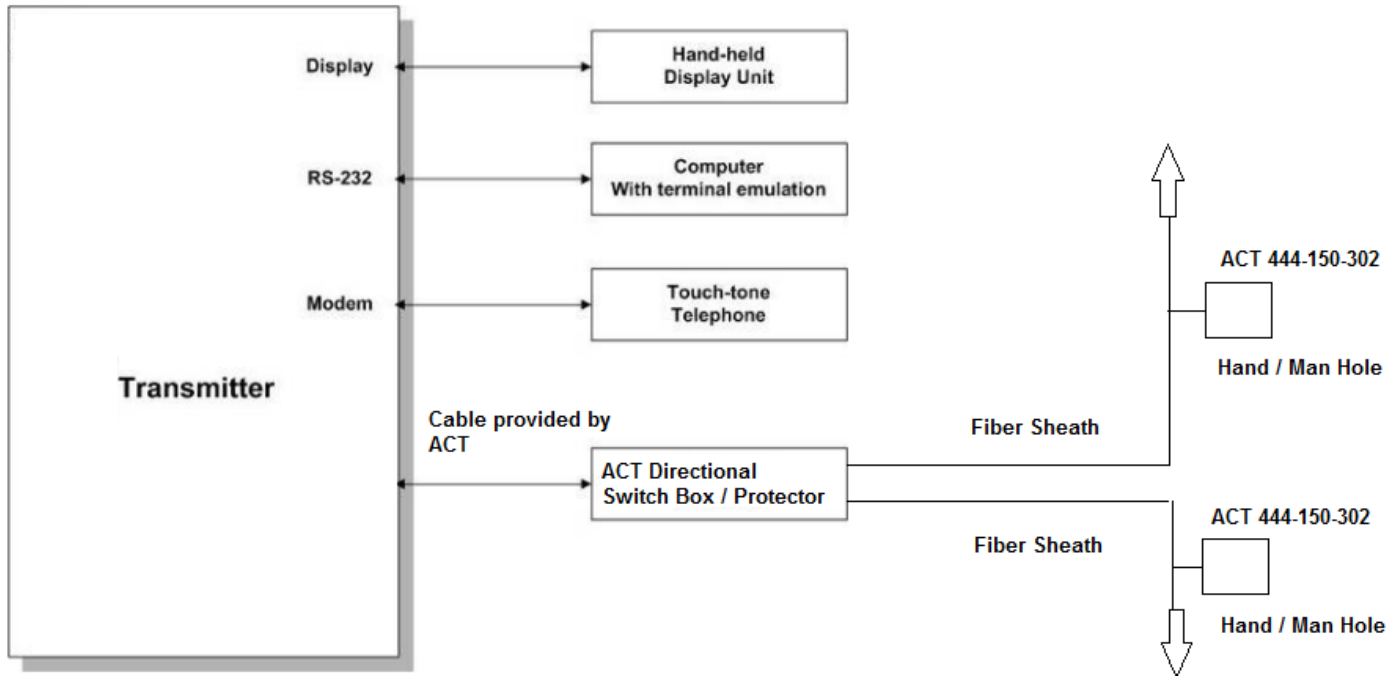

## Protection Locations

ACT 442 goes **ABOVE** ground, ACT 444 goes **BELOW** ground.

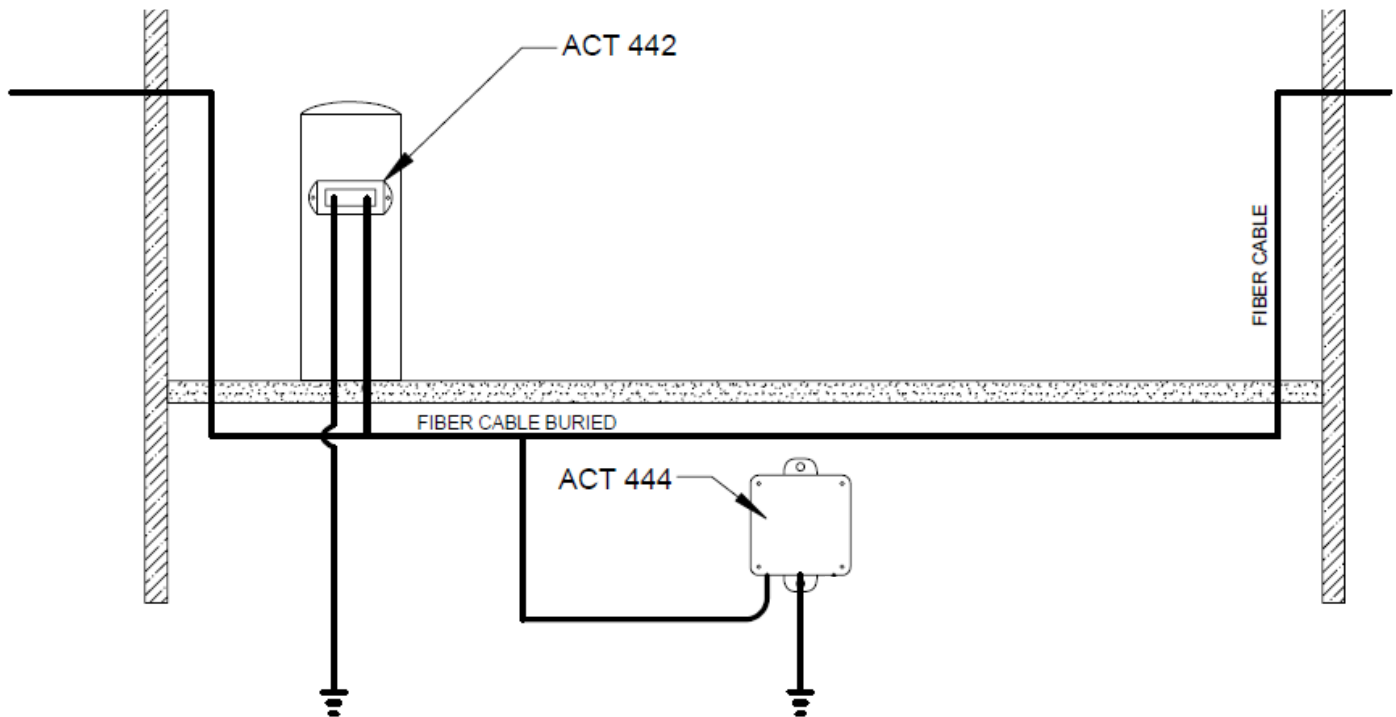




# CABLE LOCATION TRAINING

## ACT 444 is the PRIMARY Fiber Cable Protector


### BACKBONE APPLICATION

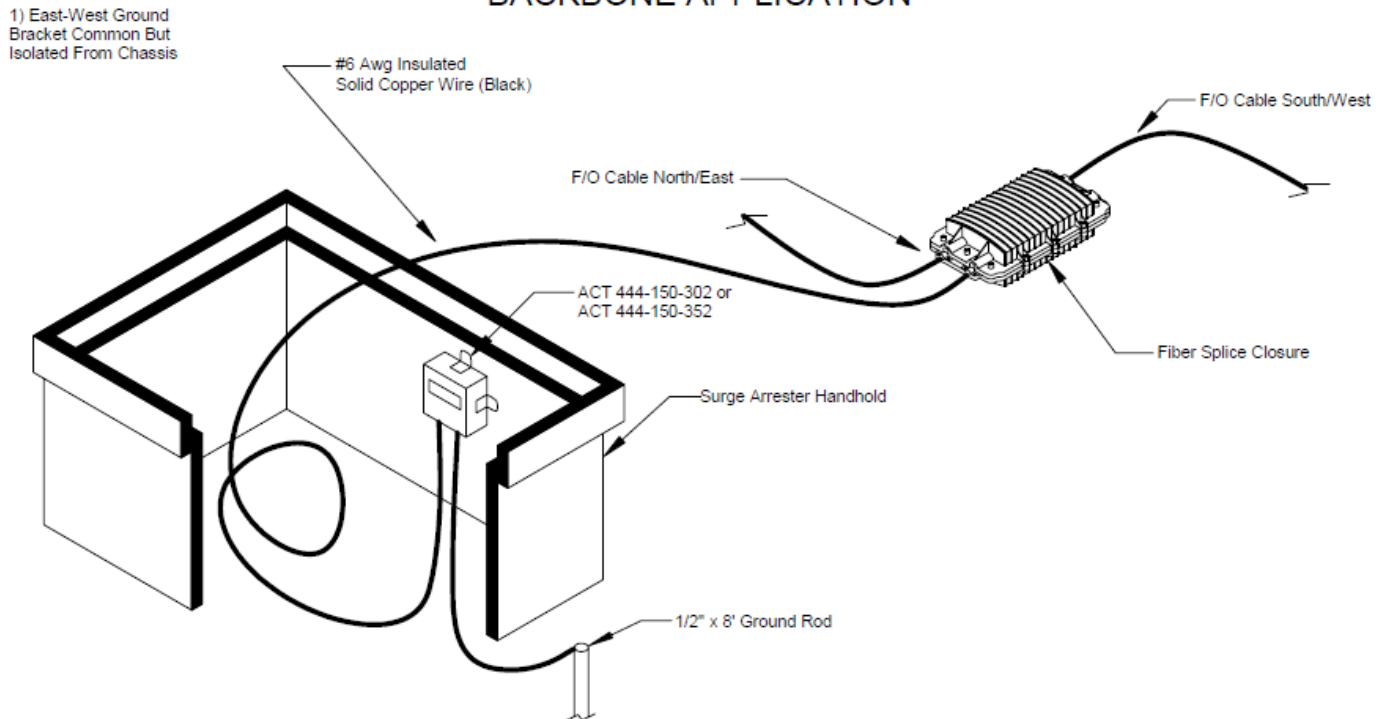

ACT 444-150-302 or ACT 444-150-352 Spur Application

## ACT 444 & 442 Family Connections are the Same

2 leads, sheath and ground connection

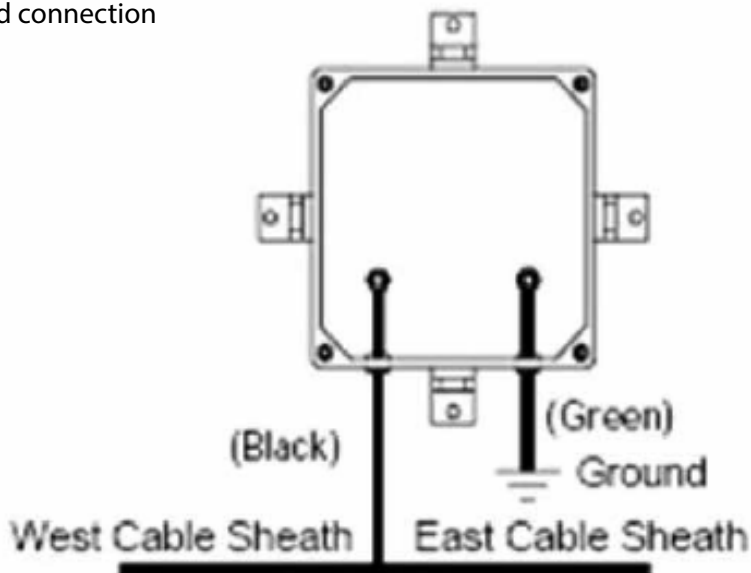

# CABLE LOCATION TRAINING

## ACT 444


2 leads, sheath and ground connection

- ▶ **302 Back Bone SPD** – Used at every splice point
- ▶ **352 Side Leg SPD** – Used at each “T” splice or end of a SPUR
- ▶ **402 End Termination SPD** – Used at end of a short haul backbone ( 5 miles or less)

## Example Setup


From Rack Transmitter, a signal is sent to a Directional Switch with Protectors

From ACT Switchbox the tone is sent on Fiber Sheath to distant GROUND or ACT 444-150-402 End Termination Unit

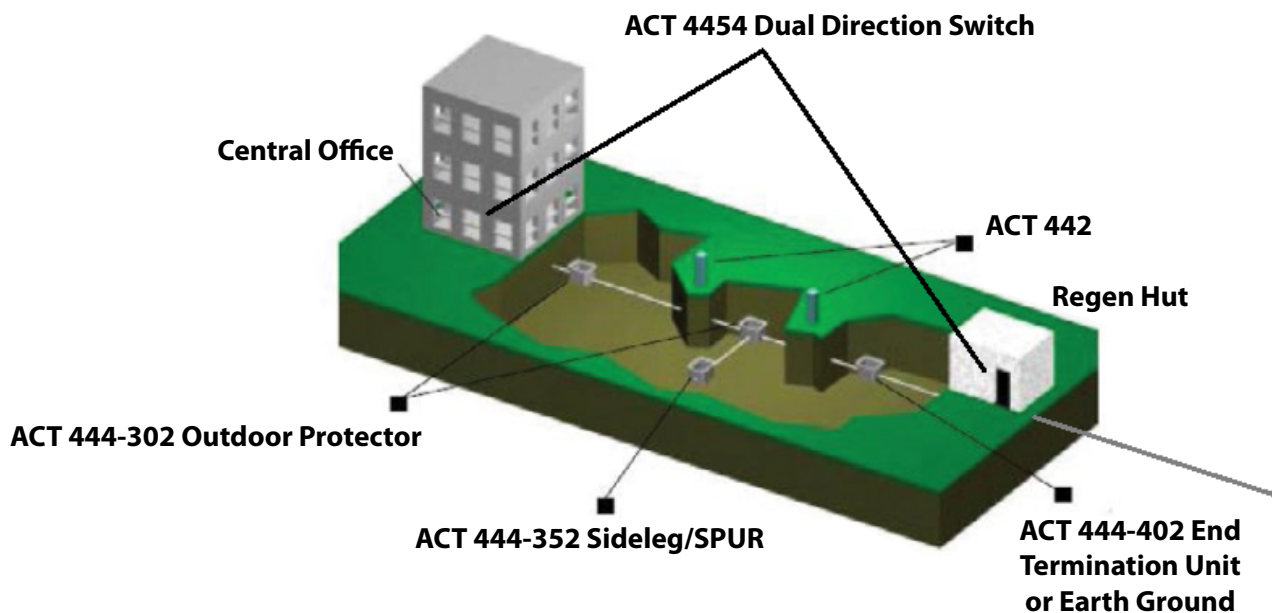


# CABLE LOCATION TRAINING

## Typical Installation

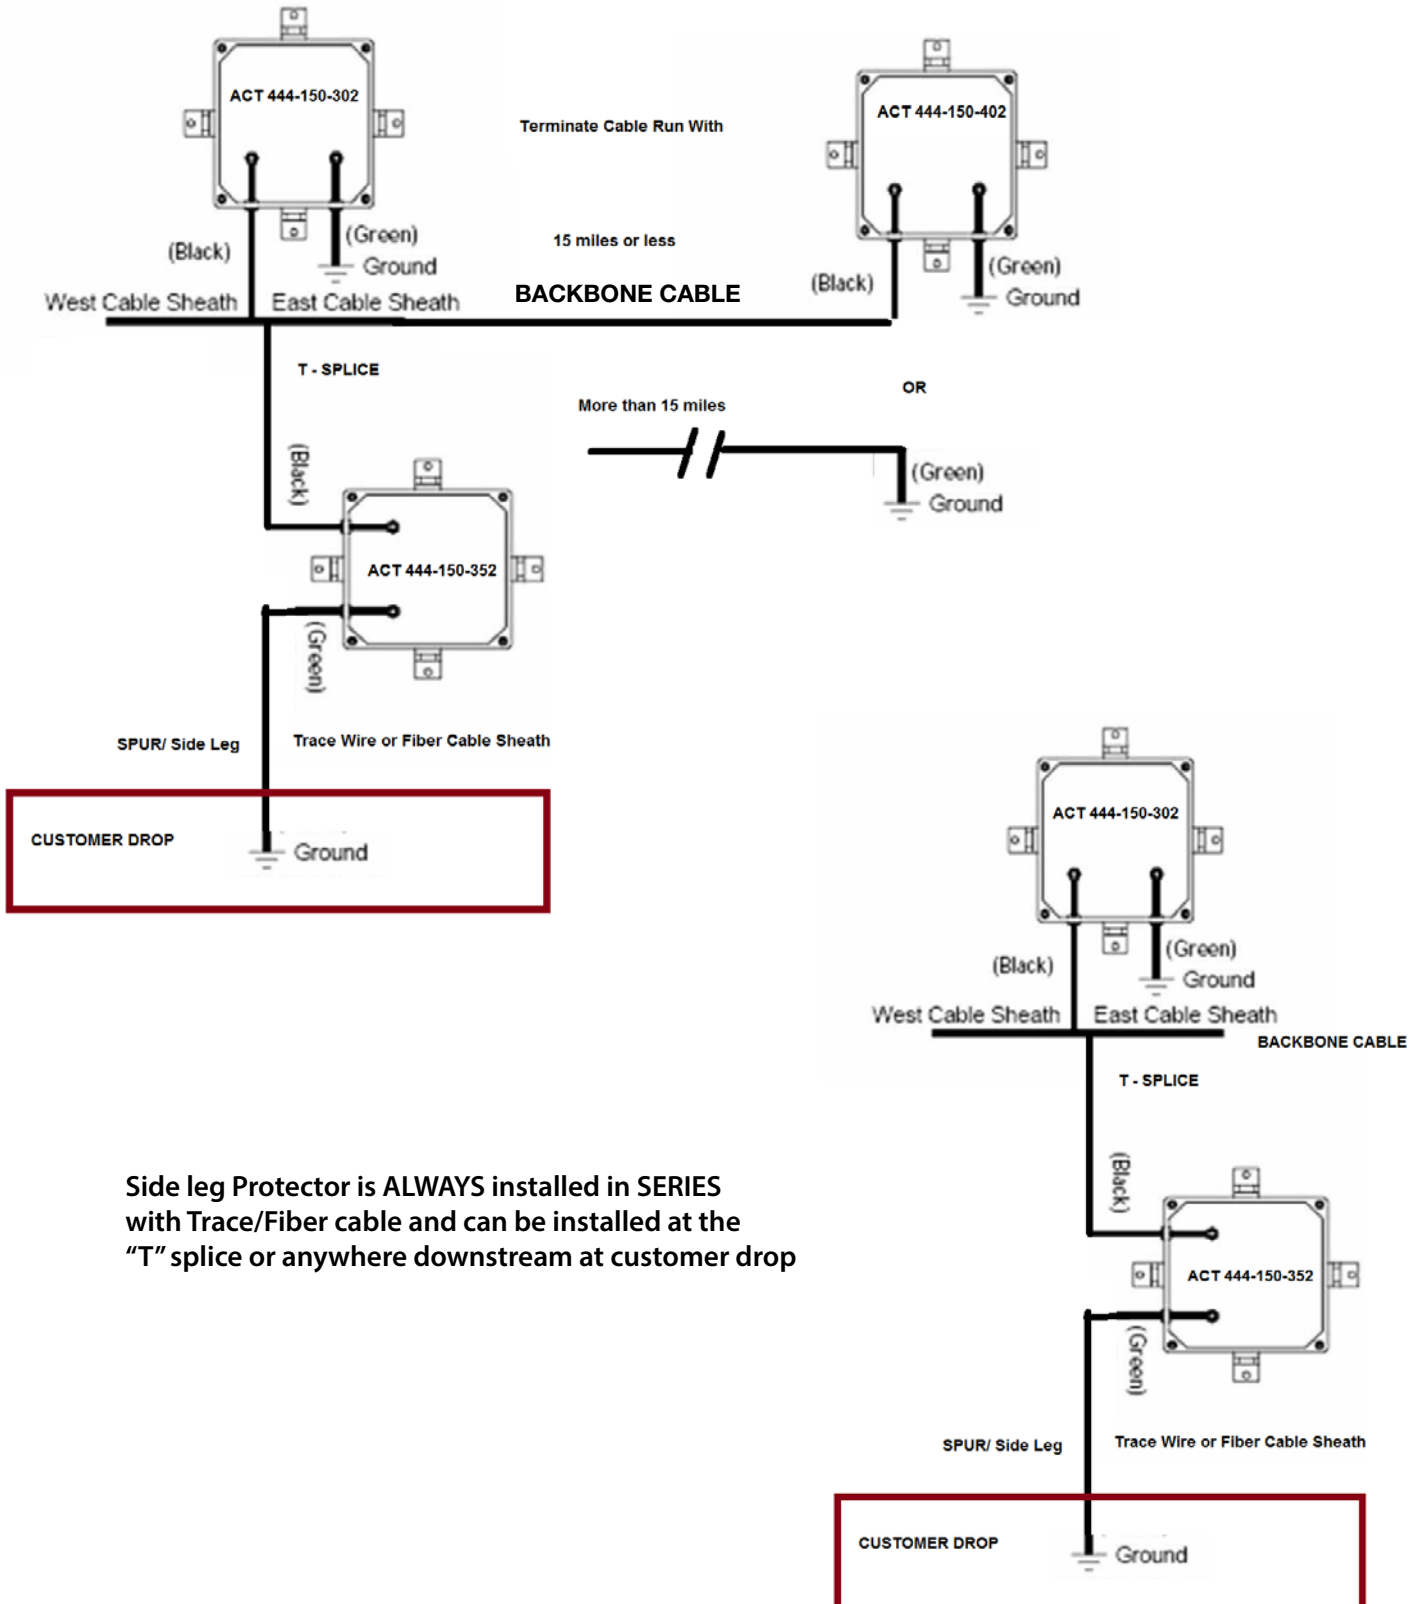

# CABLE LOCATION TRAINING

## ACT 447 Induced Power Notch Filter

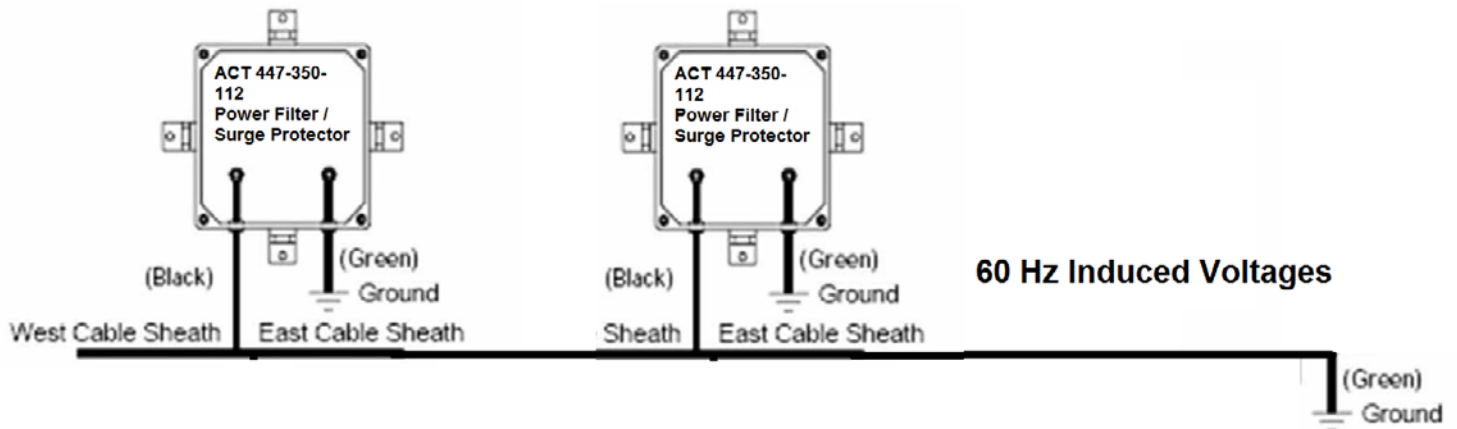

Induced 60 Hz voltages can kill personnel and damage equipment

## Long Haul Protection - Common Applications

### ALL LONG LINE MANAGEMENT SYSTEMS

- ▶ **ACT 4454-150** 2 direction switch box and protector, with control harness to LMS
- ▶ **ACT 4456-150** 4 direction switch box and protectors, with control harness to LMS
- ▶ **ACT 4457-150** 16 direction switch box and protectors, with control harness to LMS

### POINT TO POINT PROTECTION SYSTEMS

- ▶ **ACT 442-150-200** Pedestal mount only, terminal post. Access to shield
- ▶ **ACT 446-150-200** Pedestal mount only, terminal post. Dual Directional Access to shield
- ▶ **ACT 444-150-302** Underground or buried protector, waterproof box. No access to shield
- ▶ **ACT 447-350-112** Underground or buried protector and 60Hz filter, waterproof box. No access to shield.
- ▶ **ACT 447-350-132** Underground or buried protector and 60Hz 3 Amp AC filter, waterproof box. No access to shield.

# CABLE LOCATION TRAINING

## Metro / SPUR Protection

---

### SIDE LEG (SPUR) PROTECTION SYSTEMS

- ▶ **ACT 444-150-302** Underground or buried protector, waterproof box. No access to shield
- ▶ **ACT 444-150-352** Protector & Impedance Spur Point to Ground, waterproof box. No access to shield
- ▶ **ACT 447-350-112** Underground or buried protector and 60Hz filter, waterproof box. No access to shield
- ▶ **ACT 447-350-132** Underground or buried protector and 60Hz 3 Amp AC filter, waterproof box. No access to shield

### CITY RING PROTECTION SYSTEMS / TRAFFIC SIGNALING

- ▶ **ACT 444-150-352** Protector & Impedance Spur Point to Ground, waterproof box. No access to shield
- ▶ **ACT 444-150-402** Protector & Impedance End Point to Ground, waterproof box. No access to shield
- ▶ **ACT 444-150-302** Underground or buried protector, waterproof box. No access to shield
- ▶ **ACT 447-350-112** Underground or buried protector and 60Hz filter, waterproof box. No access to shield
- ▶ **ACT 447-350-132** Underground or buried protector and 60Hz 3 Amp AC filter, waterproof box. No access to shield

# ACT 442 & 444 Cable Location Protectors

## Surge Protector System



▶ The ACT 442 and 444 Cable Location Protection Family can be installed for both indoor or outdoor applications. The solid-state hybrid surge protection system is installed between the cable sheath and earth ground. Their primary function is to increase the cable locating tone range, efficiency and protect buried cable and personnel from high-energy surges. This unit may be installed either underground (waterproof), above ground (weather proof) or pedestal mounted. Proper installation and location of these devices allows greater than 75 miles of cable location from one transmitter.

### ▶ RECOMMENDED LOCATION

- Buried Fiber Locations
- Pedestal Locations
- Indoor Locations

### ▶ FEATURES AND BENEFITS

- Extends Cable Locations over 75 miles
- MOV/Gas Tube Hybrid Technology
- Fail Safe Short / Belcore Tested
- Auto-resets through life of product
- 5-Year Standard Warranty

### ▶ PHYSICAL SPECIFICATIONS

ACT 442-XXX-2YZ Family: Installed in 4"x2"x1.5" Indoor Enclosure

ACT 444-XXX- 2YZ Family: Installed in 4"x4"x2" Weather-resistant Enclosure

ACT 444-XXX-3YZ Family: Installed in 4"x4"x2" Waterproof Closure

XXX option signifies voltage application (050V, 150V, 350V)

Y option 0 - No Shorting Bar 1 - Shorting Bar

Z option includes a #6AWG stranded wires feeding through the box that connect (green) to ground and (black) to the cable sheath(s).

### ▶ ELECTRICAL SPECIFICATIONS

Surge Element Patented Hybrid Gas Tube/MOV  
Voltage Applications RMS: 50V, 150V, 350V

Clamping Voltage (@ 1mA DC): 95V, 210V, 430V  
(+10% voltage variance)

Peak Current (8x20μS): 42,000 Amps min  
Life (8x20uS) 1000A 1,000 surges

Energy Dissipation 1600 joules  
(10x1000μS):

Response Time: 1.5 Nanoseconds  
Insulation Resistance 1000 Mohm @100VDC

Capacitance @ 5KHz: 4004pf

### ▶ STANDARDS MET

- Safety – Meets UL497
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED



# ACT 442 & 444 Cable Location Protectors

## Surge Protector System


### TECHNICAL INFORMATION

Model	System
ACT 442-XXX-2Y0	Single protector 4"x2"x1.5" Design for FINK or Pedestal
ACT 442-XXX-2Y2	Single protector for Indoor With 6 ft 6 AWG cable stubs 4"x2"x1.5"
ACT 442-XXX-400	<b>Discontinued and replaced by the new ACT 442-XXX-200 Series protector</b>
ACT 444-XXX-2Y0	Single Protector for Outdoor WEATHERPROOF 4"x4"x2" USED AS TEST PORT
ACT 444-XXX-2Y2	Single protector for Outdoor With 6 ft 6 AWG cable stubs WEATHERPROOF 4"x4"x2" USED AS TEST PORT
ACT 444-XXX-3Y2	Single protector for outdoor With 6 ft 6 AWG cable stubs WATERPROOF 4"x4"x2" USED FOR BACKBONE
ACT 444-XXX-352	Single protector for outdoor With 6 ft 6 AWG cable stubs WATERPROOF 4"x4"x2" USED FOR METRO / SPUR
ACT 444-XXX-402	Single protector for outdoor With 6 ft 6 AWG cable stubs WATERPROOF 4"x4"x2" USED FOR METRO-END TERMINATION
-XXX	050, 150, 350 Volts
Y	0 = No Shorting Bar      1 = Shorting Bar


Part Number Example: ACT 444-150-302

\*Custom voltage and cable configurations are available

ACT 442-150-410 (Fink/Pedestal)

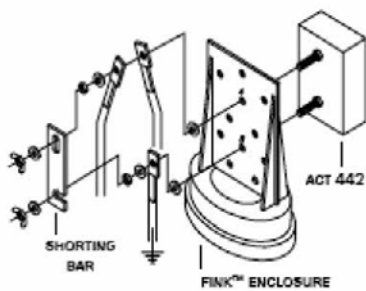

ACT 444-150-3Y2 Weather Resistant or Waterproof

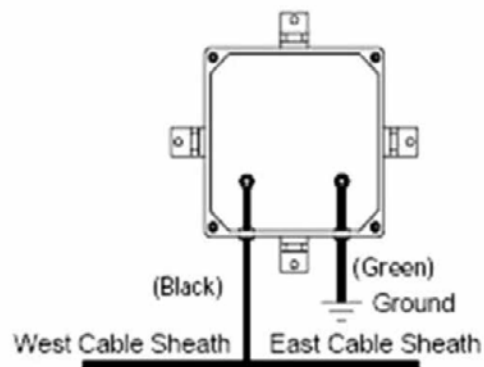

# ACT 445X Cable Location Protection

## A Switch and Protector System



- ▶ The ACT 445X Switch and Cable Locating Protection System is made up of a remote switching device controlled by a Cable Location Transmitter System. In addition the ACT 445X system is built with a high-energy surge protector. The surge protector provides a low impedance path to ground for high-energy transients (Lightning, temporary over voltage TOV, etc.); and a high impedance path for low energy signals (cable locating tones).

A multiple heavy-duty relay is installed in this unit allowing the cable sheath to remain grounded while de-energized.

When a 48 volt D.C. signal is applied from the transmitter, it lifts the earth ground off the cable and connects the transmitter tone to the cable sheath and also connects the protector from the sheath to ground.

### ▶ FEATURES AND BENEFITS

- Multiple Switching Directions (2, 4 and 16 directions)
- Green Status indicating Lights
- NO/NC Form C Dry Contacts for remote monitoring
- MOV/Gas Tube Hybrid Technology
- 5-Year Standard Warranty

### ▶ PHYSICAL SPECIFICATIONS

The ACT 445X is available for two, four or sixteen way switch cable access in one box.

For two and four way cable access (labeled 1,2,3,&4) a 12"x10"x6" box is used.

For sixteen-cable access a 16"x14"x6" wall or rack mountable box is used. This unit is sold with control cable harness ACT 445-S18-040.

Both boxes provide an internal screw terminal block for use with trace wires. Both units are sold with the control cable harness (ACT 445-S12-040) for connection to the tone transmitter.

### ▶ ELECTRICAL SPECIFICATIONS

Voltage Applications:	150V, 350V
Clamping Voltage (@ 1mA DC): (+10% voltage variance)	212V, 510V
Peak Current (8x20μS):	42,000 Amps
Energy Dissipation (10x1000μS):	1600 joules
Response Time:	1.5 Nanoseconds
Capacitance @ 5KHz:	4004pf
Relay Coil Voltage:	48 Volts DC
Relay Coil Rating:	5 Amp continuous
Signal Connector:	DB24 (other cable connector options available on request)

### ▶ STANDARDS MET

- Safety – Meets UL497
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED

### ▶ RECOMMENDED LOCATION

- Central Office
- Regen Huts

# ACT 445X Cable Location Protection

## A Switch and Protector System

### TECHNICAL INFORMATION

Model	RMS	System	Protect	DC MCOV
ACT 4454- 150	150	2 way Switch Box with 40' cable	East - G	212
			West-G	212
ACT 4454- 350	350	2 way Switch Box with 40' cable	East - G	510
			West-G	510
ACT 4456- 150	150	4 way Switch Box with 40' cable	East - G / West-G	212
			North - G / South - G	212
ACT 4456- 350	350	4 way Switch Box with 40' cable	East - G / West-G	510
			North - G / South - G	510
ACT 4457- 150	150	16 way Switch Box with 40' cable	East - G / West-G	212
			North - G / South - G	212
ACT 4457- 350	350	16 way Switch Box with 40' cable	East - G / West-G	510
			North - G / South - G	510

Part Number Example: ACT 4454-150

\*Custom voltage and cable configurations are available

#### ACT 445 Electronic Switch Box

(only used in ACT 4454 / ACT 4456 / ACT 4457 systems – Box not sold by itself)

**ACT 445-XXX-ZZZ** XXX – Protection Voltage  
 150 DC clamp voltage  
 350 DC clamp voltage  
 ZZZ – Box Type

**500** 2 Direction switch box E/W 24 pin bulkhead connectors with three terminal posts for ground and cable sheath connection. 600 4 Direction switch box E/W 24 pin pc board connector and five terminal posts for ground and 4 direction cable sheath connections

**700** 16 Direction switch box E/W 36 pin pc board connector and 17 terminal posts for ground and 16 direction cable sheath connections

Part Number Example: ACT 445-150-500

#### \*CABLE HARNESS

**ACT 445-S12-040 DB24** connectorized cable, 40 feet in length, connects ACT54 & ACT56 units to Logline Maintenance Systems tone transmitters.

**ACT 445-S18-040 DB36** connectorized cable, 40 feet in length, connects ACT57 units to Longline Maintenance Systems tone transmitters.


All switch box systems are sold as system numbers when combined with cable harness.

**ACT 4454-ZZZ SYSTEM** 2 direction, consists of: ACT 445-ZZZ-500 & (1) ACT 445-S12-040 cable. Where ZZZ = 150v or 350v protection level

Part Number Example: ACT 4454-150

**ACT 4456-ZZZ SYSTEM** 4 direction, consists of: ACT 445-ZZZ-600, (1) ACT 4454-S12-040 cable. Where ZZZ = 150v or 350v protection level

Part Number Example: ACT 4456-150

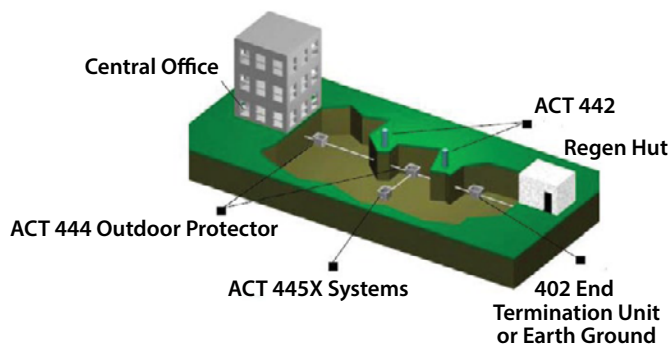

# ACT 446 Dual Cable Location Protector

## Surge Protector System



### ▶ ACT 446 Dual Cable Location Outdoor/Indoor Protectors

The ACT 446, as part of the ACT 44X Cable Locating Protection Family, can be installed for both indoors or outdoor applications. The solid-state hybrid surge protection system is installed between the cable sheath and earth ground. Their primary function is to increase the cable locating tone range and efficiency and protect buried cable and personnel from high-energy surges. This unit may be installed either underground (waterproof), above ground (weather proof) or pedestal mounted. Proper installation and location of these devices allows greater than 75 miles of cable location from one transmitter.

### ▶ RECOMMENDED LOCATIONS

- Buried Fiber Locations
- Pedestal Locations
- Indoor Locations

### ▶ FEATURES AND BENEFITS

- Extends Cable Locations over 75 miles
- MOV/Gas Tube Hybrid Technology
- 5-Year Standard Warranty

### ▶ STANDARDS MET

- Safety – Meets UL497
- ANSI/IEEE C62.41, C62.45

### ▶ 3RD PARTY TESTED

### ▶ PART NUMBERS

Model	Enclosure Type	System
ACT 446-XXX-	212	Dual Protector in Weatherproof enclosure with shorting bar 4"x4"x2" Enclosure
ACT 446-XXX-	302	Dual protector for Waterproof (Potted) with 6' 6 awg cable stubs 4"x4"x2" Enclosure
ACT 446-XXX-	400	Dual Protector for pedestal mount 3"x3"x2" Enclosure Comes WITHOUT shorting bar
ACT 446-XXX-	410	Dual Protector with shorting bar for pedestal mount 3"x3"x2" Enclosure

Part Number Example: ACT 446-150-410  
\*Custom voltage and cable configurations are available


ACT 446M is optional mounting plate available for ACT 446 - 400 series products

\*Also use ACT 4400-150 System


# ACT 446 Dual Cable Location Protectors

Surge Protector System

## ACT 446-150-410 – Pedestal Mount

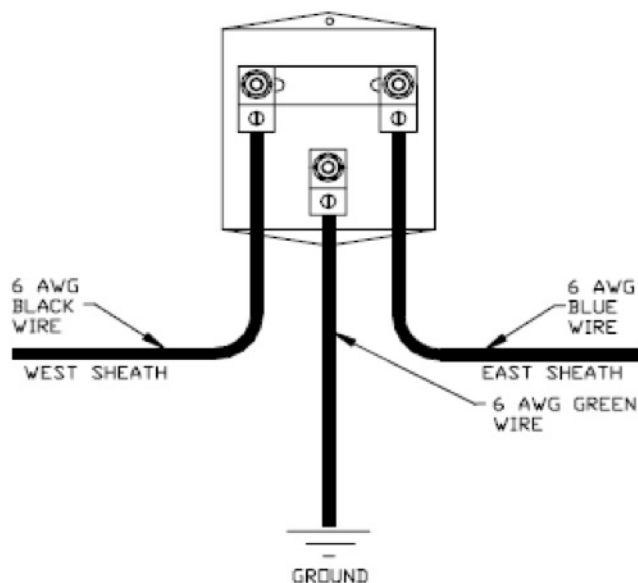

## Weather Proof Enclosure

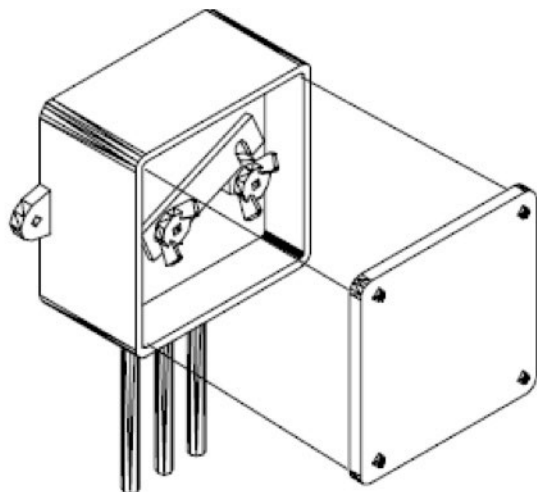

ACT 446-XXX-212

## TECHNICAL INFORMATION

### PHYSICAL SPECIFICATIONS

**ACT 446-XXX-2YZ family** Installed in 4"x4"x 2" weather resistant enclosures

**ACT 446-XXX-3YZ family** Installed in 4"x4"x2" waterproof closures

**ACT 446-XXX-4YZ families** Installed in a 3"x3"x2" indoor enclosure  
*Requires installation inside a pedestal if installed outside*

**XXX** – Option signifies voltage application (050V, 150V, 350V)

**Y** – Option "0" No shorting bar "1" with shorting bar

**Z** – Option "0" No cable "2" 6 foot of 6 AWG stranded cable (Black & Green)

### ELECTRICAL SPECIFICATIONS

Voltage Applications RMS: 50V, 150V, 350V, 650V

Clamping Voltage (@ 1mA DC):  
(+10% voltage variance) 95V, 210V, 430V, 720V

Peak Current (8x20μS): 42,000 Amps

Energy Dissipation (10x1000μS): 1600 joules

Response Time: 1.5 Nanoseconds

Capacitance @ 5KHz: 4004pf

**ACT 446 M option is a 16 awg aluminum back mounting plate for the ACT 446-150-410 module. Mounting Plate sold separately.**



# ACT 447 60hz Filter/ Protector Family

## Band Reject Filtering System



ACT 447-350-112 60 Hz Filter / Protector

### ▶ ACT Outdoor Filter/Protector Family

The ACT 447 Band Reject Filtering System is a two stage protection system installed between the cable sheath and earth ground. The ACT 447 is designed to increase cable locating or cable monitoring range while protecting buried cable from high energy surges and any 60 Hz induced voltages.

This hybrid design uses patented surge protection technology and the second stage of the filter utilizes a 60 Hz band reject filter. The ACT 447 can increase cable-locating efficiency and allows more than 50 miles of cable to be located with one transmitter in a single direction.

### ▶ RECOMMENDED LOCATIONS

- Buried Fiber Locations
- Pedestal Locations
- Indoor Locations

### ▶ SYSTEM FEATURES

- No other filter on the market can safely discharge as much energy
- Fast Response Time - <10 nS
- Hybrid Filter- MOV/Gas Tube AND 60 Hz filter
- Filter Protector turns on at 1mA
- Just two easy connections
- 2 Years Standard Warranty

### ▶ PART NUMBERS

#### ACT 447-350-1XX-A

350 Protection for 350Vrms  
150 Protection for 150Vrms

#### 1XX

#### 112 Series

**60Hz 1 Amp:** <100 ohms typical at 60 Hz, waterproof with standard 6 AWG stranded cable.

#### 132 Series

**60Hz 3 Amp:** <50 ohms typical at 60 Hz, waterproof with standard 6 AWG stranded cable.

*Note: Filter is designed for continuous operation up to 110vrms @ 1 amp or 3 amps operation at 60 Hz.*

#### -A Option

Option code reserved for all projects using AT&T standards or specifications. Design includes all leads being specified to 6 AWG solid copper.

Example Part Numbers:

**ACT 447-150-112**

**ACT 447-350-112-A**





# ACT 447 60hz Filter/ Protector Family

## Band Reject Filtering System

### PHYSICAL SPECIFICATIONS

The **ACT 447-112 Series** comes in a 5" diameter X 9" long cylinder

The unit weighs approximately 13 pounds.

The **ACT 447-132 Series** comes in a 7.5" diameter X 10.5" long cylinder

The unit weighs approximately 31 pounds.

### ELECTRICAL SPECIFICATIONS

Voltage Applications:	150, 350VDC
Clamping Voltage (@ 1mA DC): (+10% voltage variance)	220, 430VDC
Power Rating:	Unlimited
Peak Current (8x20μS):	*70,000 Amps
Energy Dissipation (10x1000μS):	1600 joules
Response Time:	<10 Nanoseconds
Capacitance @ 5KHz:	4004pf
Operating Temperature:	-40C to +60C
Frequency Rejection Level:	>60db @ 60Hz

### INSTALLATION

All Outside Plant practices for safety must be followed while installing the Cable Locating Protection System. Of particular importance is Electrical Hazard Safety.


1. DO NOT TOUCH the cable sheath or wire terminals connected to the sheath with a bare hand.
2. Use Dielectric Insulated Gloves when handling any cable sheath and grounding system.
3. Use only tools that have Dielectric Insulated handles
4. **TO ENSURE SAFETY TO EQUIPMENT AND PERSONNEL, ACT SUGGEST THAT A FILTER BE INSTALLED WHEREVER INDUCED VOLTAGE EXCEEDS 50 VOLTS AS MEASURED FROM SHEATH TO GROUND. MULTIPLE FILTERS WILL BE REQUIRED ACROSS THE CABLE RUN TO INSURE INDUCED VOLTAGES OF LESS THAN 50 VRMS IS MAINTAINED ACCORDING TO NEC CODE.**

### TESTING

Pretest cable sheaths at each location to determine if AC voltage exists.

Install the **ACT 447 Filter Isolators** at any location where induced AC voltage exceed 50 volts.

### ACT447 Filter Protector Connection

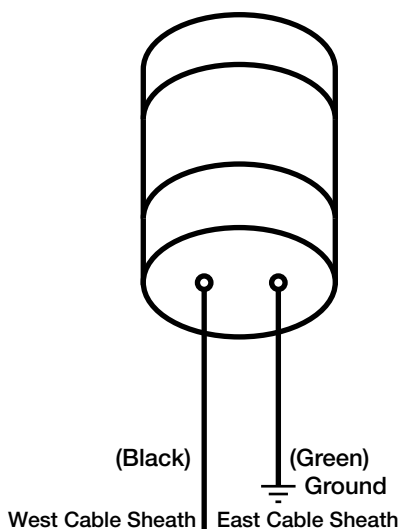

### WARNING:

To ensure National Electrical Code is met, and to operate product in the safest environment possible, it is essential that multiple filters be installed throughout the cable backbone until the overall induced voltage on a floated cable is 50 volts rms or less (seen on the cable mid-point and at the location switch box).

# ACT 422 Telephone and Alarm Protector



## Available in four versions:

ACT 422-180-RJ11 series is the most common configuration for telephones

ACT 422-005-RJ45 is the most common configuration for Alarms and Data line protection under +05 volts

ACT 422-060-PoE is most common for Power over Ethernet and Alarm circuit applications

ACT 422-CAT6-101 is most common for High-speed Ethernet

## FEATURES AND BENEFITS

- Robust Design – 10kA (8x20uSec)
- Uses dual Hybrid Protection design
- Transient Silicon Diode Technology
- Fast Response Time < 1 nSec
- Extremely low let through voltages
- Absorbs and Dissipates surges within the unit
- All Mode Protection (T-R, T-G, R-G)
- 1 Year Standard Warranty
- All units shipped with male-to-male patch cord

## STANDARDS MET

- UL 497A
- ANSI/IEEE C62
- 3rd Party Tested

## TECHNICAL INFORMATION

**ACT 422-180-RJ11** 4-Wire Telephone  
RJ-11 Socket to RJ-11 Socket

**ACT 422-005-RJ45** 8-Wire Ethernet, Data and Alarm  
RJ-45 Socket to RJ-45 Socket

**ACT 422-060-PoE** 8-Wire Power over Ethernet  
RJ-45 Socket to RJ-45 Socket

**ACT 422-CAT6-101** 8-Wire Power over Ethernet  
RJ45 10/100/1000 Base-T Ethernet

*All units shipped with 12" male-to-male patch cord.*

## MECHANICAL SPECIFICATIONS

**Dimensions:** 4" x 1" x 1" (100 mm x 25mm x 25 mm)  
**Weight:** 6 oz (170 g)

## RECOMMENDED LOCATION

- Residential & Commercial Telephone
- Alarm Lines
- Datacom Lines
- High-Speed Ethernet

## ELECTRICAL SPECIFICATIONS

Model	Telephone	Data	PoE
Nominal Working Voltage <b>Un</b>	180V	5V	48V
Max. Continuous Operating Voltage <b>Uc</b>	250V	7.5V	70V
Nominal Load Current <b>IL</b>	10A		
Nominal Discharge Current <b>In</b> (8/20 $\mu$ s)	2.5Ka		
Max Discharge Current <b>I<sub>max</sub></b> (8/20 $\mu$ s)	10Ka		
Limiting Voltage <b>Up</b>	<300V	$\leq$ 15v	$\leq$ 0.25KV
Response Time <b>ta</b>	$\leq$ 1ns		
Data Rate <b>Vs</b>	1Mbps	100Mbps	
Insertion Loss <b>Ae</b>	$\leq$ 0.5dB		
Connector Type	RJ11	RJ45	
Protection Pin		Pin1/2, 3/6	Pin4/5, 7/8
Dimensions	4.09 X 1.57 X .98 inches (104x40x25mm)		
Working Environment	-40°C ~ +80°C, Relative humidity : $\leq$ 95%		
Protection Level	IP20		



**ACT**  
COMMUNICATIONS™



222 N CENTER | BONHAM, TX 75418 | 903.583.8097 | ACT-COMMUNICATIONS.COM | SALES@ACT-COMMUNICATIONS.COM

rev.15 12 18